

PLANNING APPLICATION FORM

Section 57 & 58

OFFICE USE
ONLY

Application Number PA2026179

Assess No: A3515

PID No: 7582402

Applicant Name:	Wilson Homes Pty Ltd					
Applicant Contact Name						
Postal Address:						
Contact Phone:	Home		Work		Mobile	
Email Address:						

Planning Application Lodgement Checklist

The following documents have been submitted to support the consideration of this application:

1. A current copy of the property title text, folio plan and schedule of easements x
2. A completed application form including a detailed description of the proposal x
3. A complete plan set: x
 - a) Floor plans x
 - b) Elevations (from all orientations/sides and showing natural ground level and finished surface level) x
 - c) Site Plan showing: x
 - Orientation
 - All title boundaries
 - Location of buildings and structure (both existing and proposed)
 - Setbacks from all boundaries
 - Native vegetation to be removed
 - Onsite services, connections and drainage details (including sewer, water and stormwater)
 - Cut and/or Fill
 - Car parking and access details (including construction material of all trafficable areas)
 - Fence details
 - Contours
4. Other:

*If submitting plans in over the counter please ensure they are A3.
All plans must be to scale.*

WEST TAMAR COUNCIL



Application Number: «Application Number»

APPLICANT DETAILS

Applicant Name: Wilson Homes Tasmania 7006

Note: Full name(s) of person(s) or company making the application and postal address for correspondence.

LAND DETAILS

Owner/Authority Name:
(as per certificate of title) **Robert Davis**

Location / Address: 8 Murrumbung Court, Grindelwald Tasmania 7277

Title Reference: (38605/92)

Zone(s):

Existing Development/Use: Vacant Land

Existing Developed Area: As Above

Are any of the components in this Application seeking retrospective approval?
E.g. Use and/or development that has commenced without a Planning Permit.

YES ☐

NO ☒

(If yes please specify the relevant components):

DEVELOPMENT APPLICATION DETAILS

Proposed Use:

Residential: x

Visitor Accommodation: ☐

Commercial: ☐

Other: ☐

Description of Use:

Development Type:

Building work: x

Demolition: ☐

Subdivision: ☐

Other: ☐

Description of development: Proposed New Dwelling

New or Additional Area:

139.08m2

Estimated construction cost of the proposed development:

440,000.00

Building Materials:

Wall Type: Brick Veneer

Colour: TBC

Roof Type: Sheet Metal

Colour: TBC

Application Number: «Application Number»

VISITOR ACCOMMODATION

☐ N/A

Gross Floor Area to be used per lot:		Number of Bedrooms to be used:	
Number of Carparking Spaces:		Maximum Number of Visitors at a time:	

SUBDIVISION

☐ N/A

Subdivision creating additional lots ☐
 Boundary adjustment with no additional lots created ☐

Number of Lots (existing) :		Number of Lots (proposed) :	
Description:			
If applying for a subdivision which creates a new road(s), please supply three proposed names for the road(s), in order of preference:			
1.			
2.			
3.			

COMMERCIAL, INDUSTRIAL OR OTHER NON-RESIDENTIAL DEVELOPMENT/USE

☐ N/A

Hours of Operation:	Monday / Friday:		To	
	Saturday:		To	
	Sunday:		To	

Existing Car Parking:	
Proposed Car Parking:	

Number of Employees: (Existing)	
Number of Employees: (Proposed)	

Type of Machinery installed:	
Details of trade waste and method of disposal:	

Application Number: «Application Number»

APPLICANT DECLARATION

Owner: As the owner of the land, I declare that the information contained in this application is a true and accurate representation of the proposal and I consent to this application being submitted and for Council Officers to conduct inspections as required for the proposal,

Name (print)

Signed

Date

Applicant: As the applicant, I declare that I have notified the owner of my intention to make this application and that the information contained in this application is a true and accurate representation of the proposal,
(if not the owner)

Name (print)

Signed

Date

Please Note: If the application involves Crown Land you will need to provide a letter of consent and this form signed by the Minister, or a delegated officer of the Crown with a copy of the delegation.

**Crown
Consent**
(if required)

Name (print)

Signed

Date

**Chief
Executive
Officer**
(if required)

Name (print)

Signed

Date

If the subject site is accessed via a right of way, the owner of the ROW must also be notified of the application.

Right of Way Owner:

As the applicant, I declare that I have notified the owner of the land encumbered by the Right Of Way, of my intent to lodge this application that will affect their land.

Name (print)


Signed

Date


OS K 1110

SP 38605

Owner: VOS NOMINEES PTY. LTD.	PLAN OF SURVEY by Surveyor..... PAUL ANTHONY PHELPS of..... related to the CAMPBELL SMITH PHELPS PEDLEY PTY. LTD. of 60 ELPHIN RD. LAUNCESTON of land situated in the LAND DISTRICT OF WESTMORELAND DEVON PARISH OF WELLS ST. MICHAELS SCALE 1: 2500 MEASUREMENTS IN METRES	Registered Number: SP38605
Title Reference: ENV 54/0002 C.T. 4441/39, C.T. 4441/40 & C.T. 4382/80		Approved Effective from: 14 MAR 1989
Grantee: PART OF 1140 ac GRANTED TO HENRY JENNINGS & WILLIAM DORSET GRUBB PART OF 800 ac GRANTED TO JOSIAS McALLAN PART OF 225-1-21 GTD TO BERNARD GRANVILLE ATKINSON		Recorder of Titles

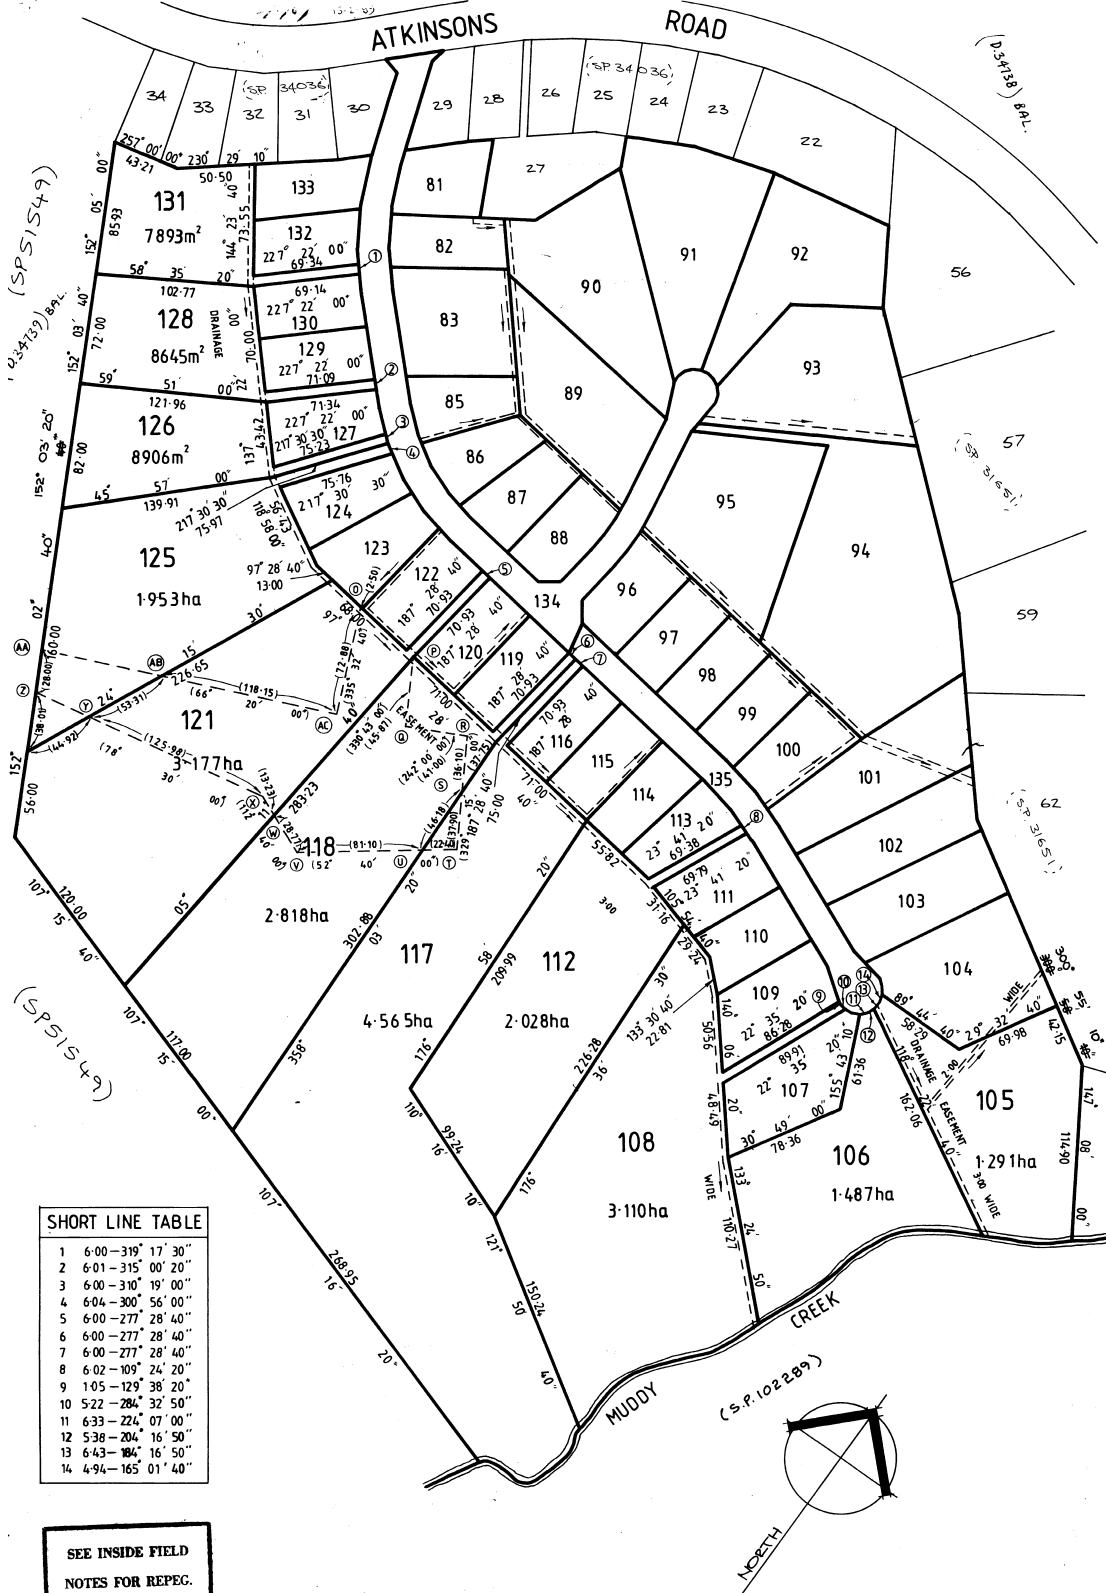


ANNEXURE SHEET No. 1 (of 2 annexures) to plan by Surveyor	This sheet contains detailed drawings of parcels shown on the index plan to which it is attached, which plan is verified by my certificate dated 4-11-2022 and that certificate extends to the detail shown on this sheet.	Registered Number: SP38605
Signed for the purposes of identification Council Clerk: <i>[Signature]</i>	Surveyor: <i>[Signature]</i> Owner: VOS NOMINEES PTY. LTD. Title Reference: CONV 54/0002	Scale 1: 1500 Measurements in Metres

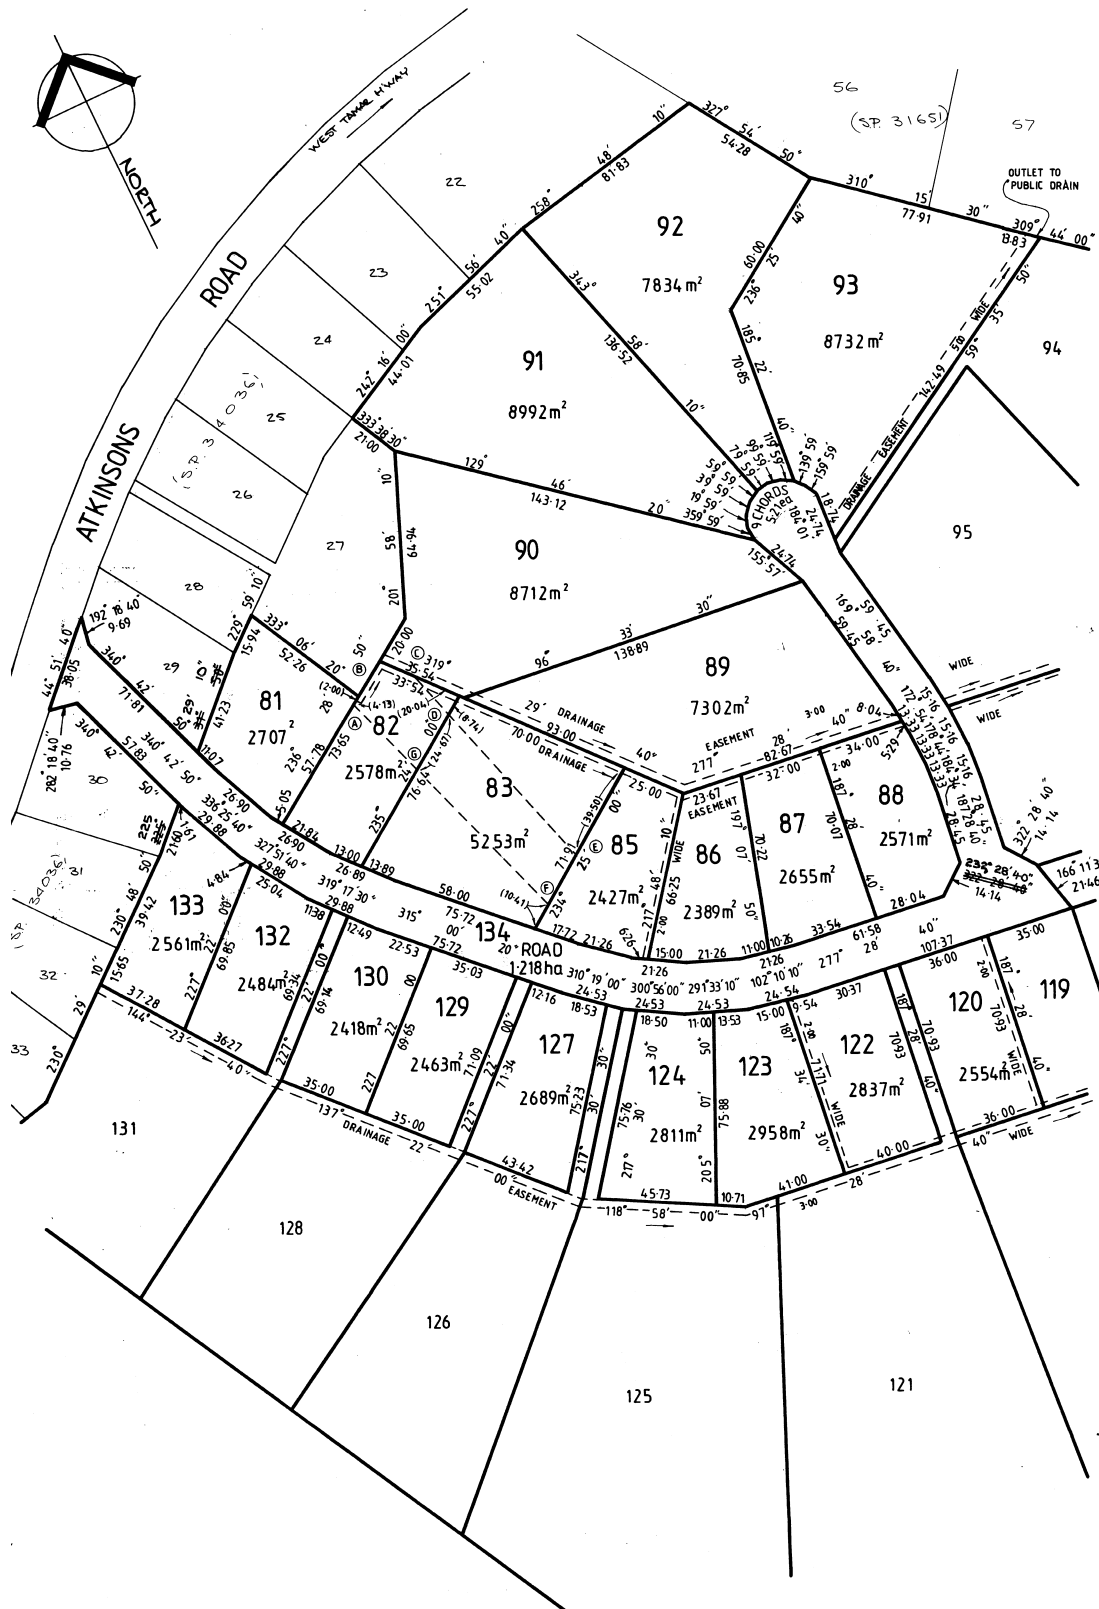

OS K 1109

ANNEXURE SHEET No. 2 (of 2 annexures) to plan by Surveyor	This sheet contains detailed drawings of parcels shown on the index plan to which it is attached, which plan is verified by my certificate dated 4-11-20 and that certificate extends to the detail shown on this sheet. Surveyor <i>Paul A. Delp</i>	Registered Number: SP38605
Signed for the purposes of identification Council Clerk <i>[Signature]</i>	Owner: VOS NOMINEES PTY. LTD. Title Reference: CONV 54/0002	Scale 1:1500 Measurements in Metres

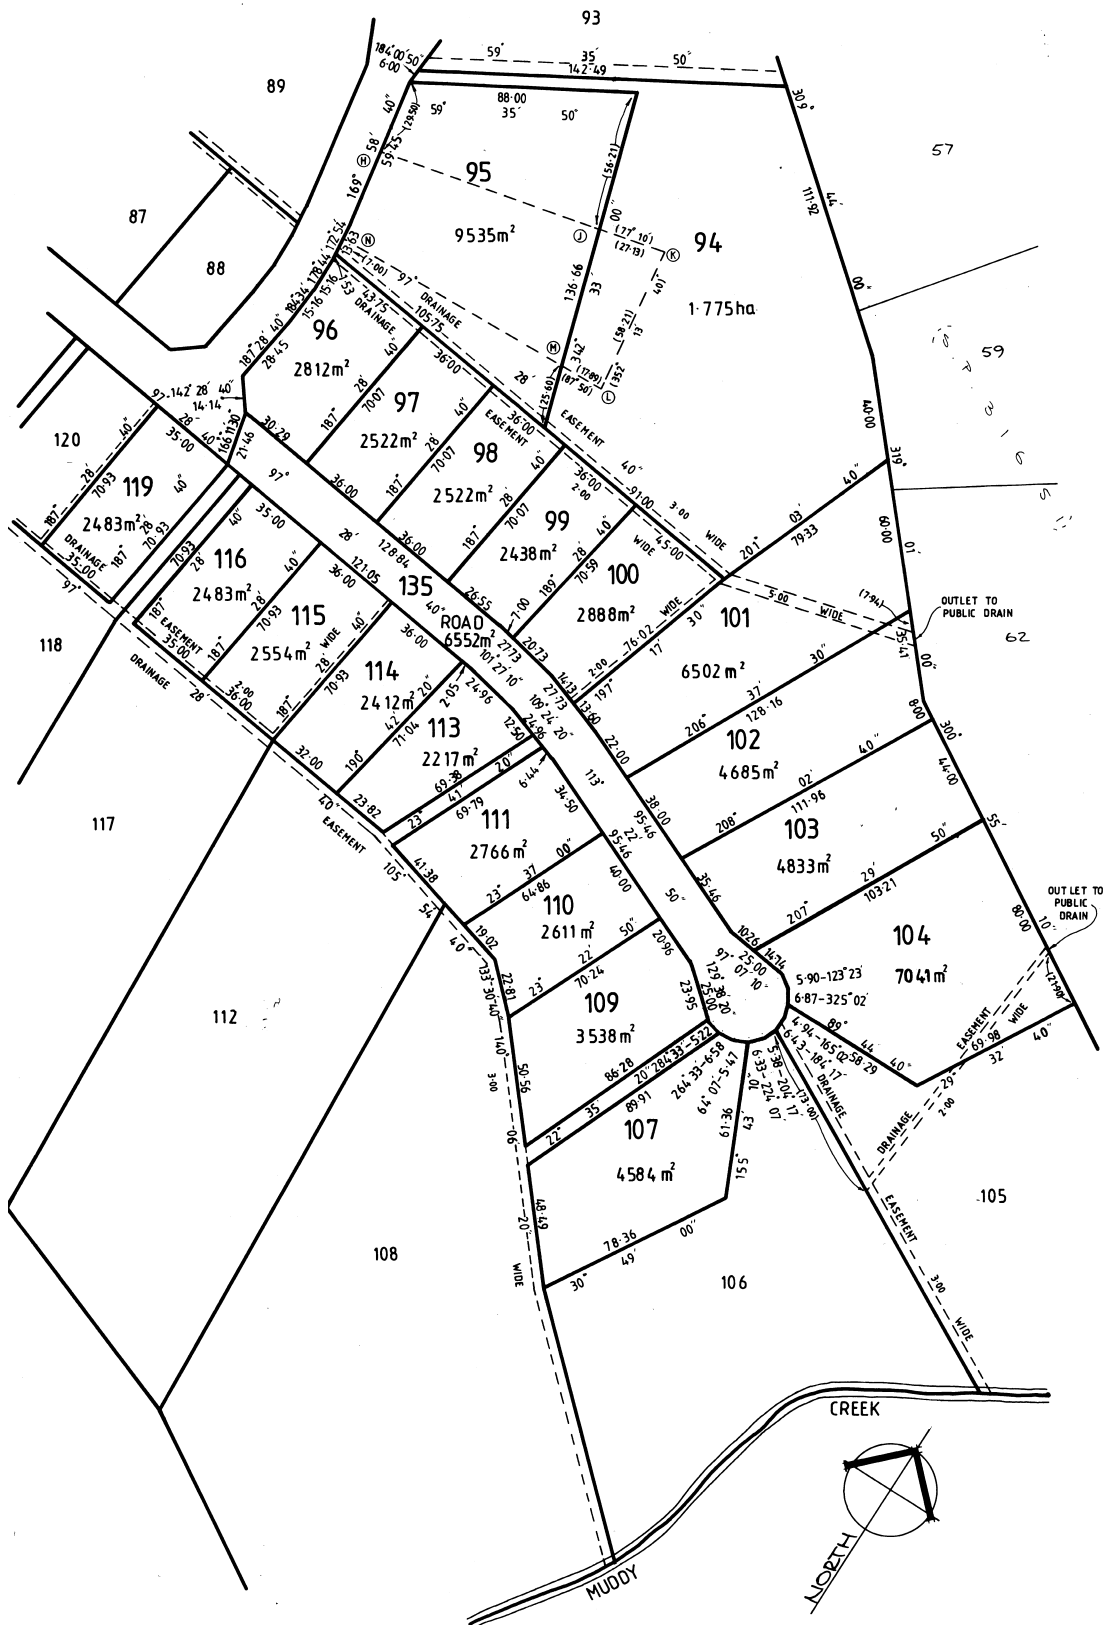

DA
TASMANIAN PLANNING SCHEME

SHEET INDEX

1	COVER SHEET
2	SITE PLAN
3	SOIL & WATER MANAGEMENT PLAN
4	GROUND FLOOR PLAN
5	ELEVATIONS / SECTION
6	ELEVATIONS
7	WINDOW & DOOR SCHEDULES
8	CALCULATIONS
9	DETAILS (FACE BRICKWORK)
10	DETAILS (CLADDING)
11	ROOF DRAINAGE PLAN
12	ROOF VENTILATION PLAN
13	FLOOR COVERINGS
14	KITCHEN DETAILS
15	BATHROOM DETAILS
16	ENSUITE DETAILS
17	LAUNDRY DETAILS
18	3D VIEWS
19	GENERAL NOTES
20	WET AREA & ENERGY EFFICIENCY NOTES
21	BUILDING ACT BUSHFIRE HAZARD AREAS
22	BAL 12.5 NOTES
23	BAL 12.5 - BAL 40 ROOF DETAILS

TOTAL FLOOR AREAS

MAIN DWELLING, GROUND FLOOR	
GARAGE	24.89
LANDING	2.38
LIVING	109.72
PORCH	2.09
	139.08 m²

HIGHLY REACTIVE /
PROBLEMATIC SOIL TYPE.
REFER TO HYDRAULICS PLANS
AND DETAILS PREPARED BY
GANDY AND ROBERTS

ON SITE WASTEWATER
TREATMENT REQUIRED. REFER
TO REPORT PREPARED BY
GES (TBC)

ON SITE STORMWATER
MANAGEMENT.
REFER TO REPORT PREPARED BY
GES/FLUSSIG (TBC)

AS & NCC COMPLIANCE

- ALL CONSTRUCTION TO BE IN ACCORDANCE WITH NCC 2022 AND APPLICABLE AUSTRALIAN STANDARDS AT TIME OF APPROVAL.
- SLAB IN ACCORDANCE WITH AS 2870. REFER TO ENGINEERS DETAILS FOR ALL SLAB DETAILS.
 - BRICK CONTROL JOINTS PROVIDED IN ACCORDANCE WITH NCC 2022.
 - ALL STEEL FRAMING TO BE DESIGNED TO AS 4100-2020 OR AS/NZS 4600-2018.
 - INSULATION TO BE INSTALLED IN ACCORDANCE WITH NCC 2022 AND ALL APPLICABLE AUSTRALIAN STANDARDS.
 - TERMITE PROTECTION IN ACCORDANCE WITH AS 3660 AND NCC 2022.
 - GLAZING IN ACCORDANCE WITH AS 1288 AND NCC 2022.
 - SMOKE ALARMS IN ACCORDANCE WITH AS 3786 AND NCC 2022.
 - INTERNAL WATERPROOFING IN ACCORDANCE WITH NCC 2022 HOUSING PROVISIONS PART 10.2.
 - EXTERNAL WATERPROOFING IN ACCORDANCE WITH AS 3740 AND AS 4654.
 - WET AREA FLOORS TO FALL TO FLOOR WASTES AT MIN. 1:80 AND MAX. 1:50 GRADE (IF APPLICABLE).
 - CONDENSATION MANAGEMENT IN ACCORDANCE WITH NCC 2022 HOUSING PROVISIONS PART 10.8.
 - BUILDING SEALING IN ACCORDANCE WITH NCC 2022.
 - SERVICES IN ACCORDANCE WITH NCC 2022.
 - EARTHWORKS IN ACCORDANCE WITH AS 3798-2007.
 - EXTERNAL WALL WRAP (SARKING) IN ACCORDANCE WITH NCC 2022 (IF APPLICABLE).
 - EXHAUST FANS DUCTED TO OUTSIDE AIR (IF APPLICABLE).


SITE SPECIFIC CONTROLS

CONTROL	DETAILS
ACID SULPHATE SOIL	NO
BIODIVERSITY	NO
BUILDING ENVELOPE	NO
BUSHFIRE	BAL-12.5
CLIMATE ZONE (NCC)	ZONE 7 - COOL TEMPERATE
DESIGN WIND CLASSIFICATION	N2 (EXPOSED TBC)
ESTATE/DEVELOPER GUIDELINES	NO
FLOOD OVERLAY	NO
HERITAGE	NO
LANDSLIP HAZARD	MEDIUM
MINIMUM FLOOR LEVEL	NO
NATURAL ASSET CODE	NO
NOISE ATTENUATION	NO
SALINE SOIL	NO
SHIELDING FACTOR	PS - PARTIAL SHIELDING
SITE CLASSIFICATION	H2
SPECIFIC AREA PLAN OVERLAY	YES
RESIDENTIAL SUPPLY AND DENSITY	
TERRAIN CATEGORY	TC2.5
TOPOGRAPHIC CLASSIFICATION	T1
WATERWAY & COASTAL OVERLAY	YES
WIND REGION	A - NORMAL
WITHIN 1km CALM SALT WATER	NO
WITHIN 50km BREAKING SURF	40.00km
ZONING	LOW DENSITY RESIDENTIAL

BUILDING CONTROLS & COMPLIANCE

CONTROL	REQUIRED	PROPOSED
SETBACKS		
FRONT	MIN. 8,000mm	19,608mm
SIDE A	MIN. 5,000mm	5,165mm
SIDE B	MIN. 5,000mm	8,860mm
REAR	MIN. 5,000mm	100,614mm
BULK & SCALE		
SITE AREA	7,834m²	
SITE COVERAGE	MAX. 30%	1.74%
LANDSCAPE		
NO APPLICABLE CONTROLS		
EARTHWORKS		
CUT DEPTH	MAX. 2,000mm	483mm
FILL DEPTH	MAX. 800mm	514mm
ACCESS & AMENITY		
PARKING SPACES	MIN. 2 SPACES	2 SPACES

3D PERSPECTIVE

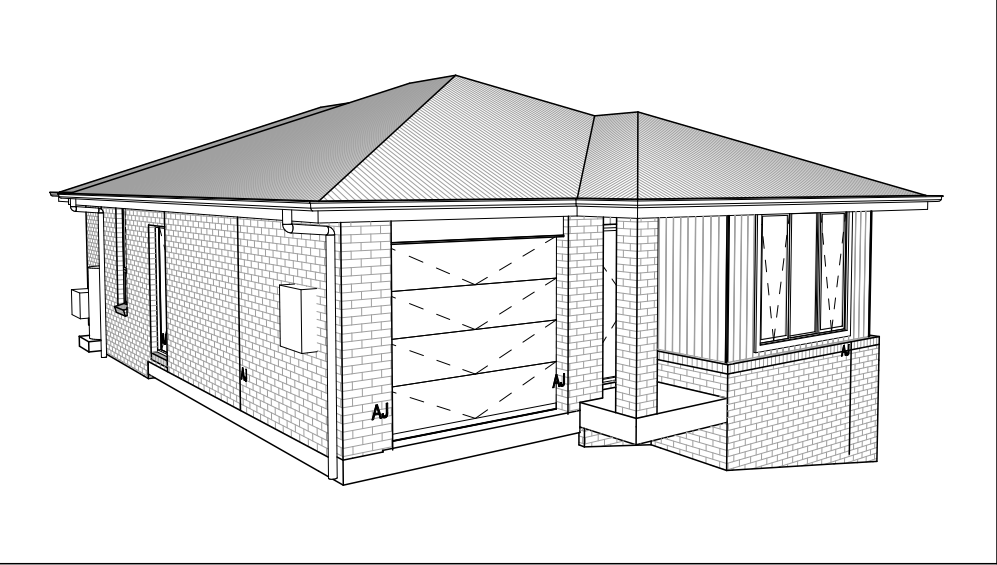

NOTE TO OWNER

THESE PLANS MAY FEATURE WORKS THAT ARE EXCLUDED FROM THE SCOPE OF WORKS WITH THE BUILDER, BUT THEY HAVE BEEN INCLUDED IN THESE DRAWINGS TO ASSIST IN THE OVERALL PLANNING AND ASSESSMENT OF THE BUILDING PROJECT. EXAMPLES OF SOME REGULARLY EXCLUDED WORKS INCLUDE DRIVEWAYS, RETAINING WALLS, SOLAR PANEL SPACING AND SITE DRAINAGE. PLEASE REFER TO YOUR SCOPE OF WORKS AND COLOUR SELECTIONS DOCUMENTATION FOR DETAILS OF INCLUDED WORKS. SOME DETAILS ARE INDICATIVE ONLY FOR EXAMPLE FLOORING, TILING, BRICKWORK AND CLADDING (EXPANSION JOINTS, ORIENTATION AND LAYOUT) AND ARE SUBJECT TO CHANGE.

LOCATION MAP



This Plan has been prepared prior to the receipt of one or more of the following documents:-
Certificate of Title inclusive of lot specific zoning, easement and covenant documents, BAL report and rating, approved
subdivision plans providing crossover locations and service connection points, power and communications connection point
information, Geotechnical Site Investigation, Contour Survey, Dial Before You Dig information, Planning Approval.

BUILDING INFORMATION	
GROUND FLOOR TOP OF WALL HEIGHT(S) 2605mm	
NOTE: CEILING HEIGHT 45mm LOWER THAN TOP OF WALL	
ROOF PITCH (U.N.O.)	23.0°
ELECTRICITY SUPPLY	SINGLE PHASE
GAS SUPPLY	NONE
ROOF MATERIAL	SHEET METAL
ROOF COLOUR	N/A
WALL MATERIAL	BRICK VENEER CLADDING
SLAB CLASSIFICATION	TBC

INSULATION

ROOF	MIN. 60mm FOIL FACED BLANKET UNDER ROOFING
CEILING	R4.1 BATTS (EXCL. GARAGE)
EXT. WALLS	R2.0 BATTS (EXCL. GARAGE)
WALL WRAP	WALL WRAP TO ENTIRE HOUSE
INT. WALLS	R2.0 BATTS ADJACENT TO GARAGE AND AS PER PLAN
FLOOR	AIRCCELL FOR B&J & BIAx SLAB R0.60

NCC 2022 LIVABLE HOUSING COMPLIANCE

STEP FREE ENTRANCE LOCATION: N/A
ACCESSIBLE SANITARY COMPARTMENT LOCATION: ENS (GROUND FLOOR)
ACCESSIBLE SHOWER LOCATION: ENS (GROUND FLOOR)

- GENERAL NOTES:
- THRESHOLD OF ACCESSIBLE SHOWER ENTRY TO BE MAX. 5mm.
 - THRESHOLD OF STEP FREE ENTRANCE DOOR TO BE MAX. 5mm.
 - THRESHOLD OF INTERIOR DOORS SERVICING HABITABLE ROOMS, LAUNDRY, ACCESSBILE SANITARY COMPARTMENT AND ROOM CONTAINING ACCESSIBLE SHOWER TO BE MAX. 5mm.
 - INTERIOR DOORS NOMINATED AS 870 TO ACHIEVE MIN. 820mm CLEAR OPENING.
 - CORRIDORS CONNECTING HABITABLE ROOMS, ACCESSBILE SANITARY COMPARTMENT AND ROOM CONTAINING ACCESSIBLE SHOWER TO ACHIEVE MIN. 1000mm CLEARANCE BETWEEN FINISHED SURFACE OF OPPOSING WALLS (EXCL. SKIRTINGS).
 - REFER TO APPLICABLE WET AREA PLANS AND INTERIOR ELEVATIONS FOR LOCATIONS OF REQUIRED WALL REINFORCEMENT FOR FUTURE GRAB RAIL INSTALLATION.

THE OWNERS ACKNOWLEDGE THAT THESE CONTRACT PLANS MAY NOT REFLECT ALL THE SELECTIONS THAT HAVE BEEN MADE OR CHANGES REQUESTED. THE OWNERS AGREE THAT FOLLOWING THE COLOUR SELECTIONS VARIATION OR UPDATING OF PLANS, THEY WILL BE PROVIDED WITH CONSTRUCTION PLANS FOR SIGNATURE PRIOR TO COMMENCEMENT OF CONSTRUCTION.

SIGNATURE:

DATE:

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

PRELIMINARY PLAN SET

5	PRELIMINARY PLAN SET - UPGRADED TO BE 3.6M WIDE TO CROSS OVER & THE WESTERN SIDE OF THE FRONTAGE	ALL	2026.07.30	TNG	-
4	PRELIMINARY PLAN SET - INITIAL ISSUE	ALL	2026.06.12	TDI	-
No.	AMENDMENT	SHEET	DATE	DRAWN	CHECK

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.




PECIFICATION: NOW BY WILSON HOMES		REVISION		DRAWN		CLIENT:		HOUSE DESIGN:		HOUSE CODE:		DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.		
	1	SITE PLAN		MFC	02/04/2026	ROBERT DAVIS		AUGUSTA 15		H-WNWAUG10SA				
COPYRIGHT: © 2026	2	CONSOLIDATED PROPOSAL 1 UPDATE		MFC	15/05/2026	ADDRESS:		FACADE DESIGN:		FACADE CODE:				
	3	CONSOLIDATED PROPOSAL 1 UPDATE		MFC	28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277		OAKWOOD		F-WNWAUG10OKWDA				
	4	PRELIM PLANS - INITIAL ISSUE		TDI	12/06/2026	LOT / SECTION / CT:		SHEET TITLE:		SHEET No.:				
	5	PRELIMINARY PLANS - PLAN CORRECTIONS		TNG	30/07/2026	92 / - / 38605		COUNCIL: WEST TAMAR		COVER SHEET		1 / 23	SCALES:	714740

APPROX. CUT/FILL		
CUT	18.09m ³	40.70
FILL	11.96m ³	26.91
DIFFERENCE	6.13m ³	13.79
14 TONNES OF EXPORT FILL		

BAL-12.5 BUSHFIRE REQUIREMENTS SEE SHEET 1 (COVER SHEET) FOR DETAILS

**PLANS ARE PRELIMINARY ONLY
PENDING ENGINEER'S DESIGN**

**PLANS ARE PRELIMINARY ONLY
PENDING FURTHER INVESTIGATION &
CONFIRMATION OF PROPERTY CONNECTIONS**

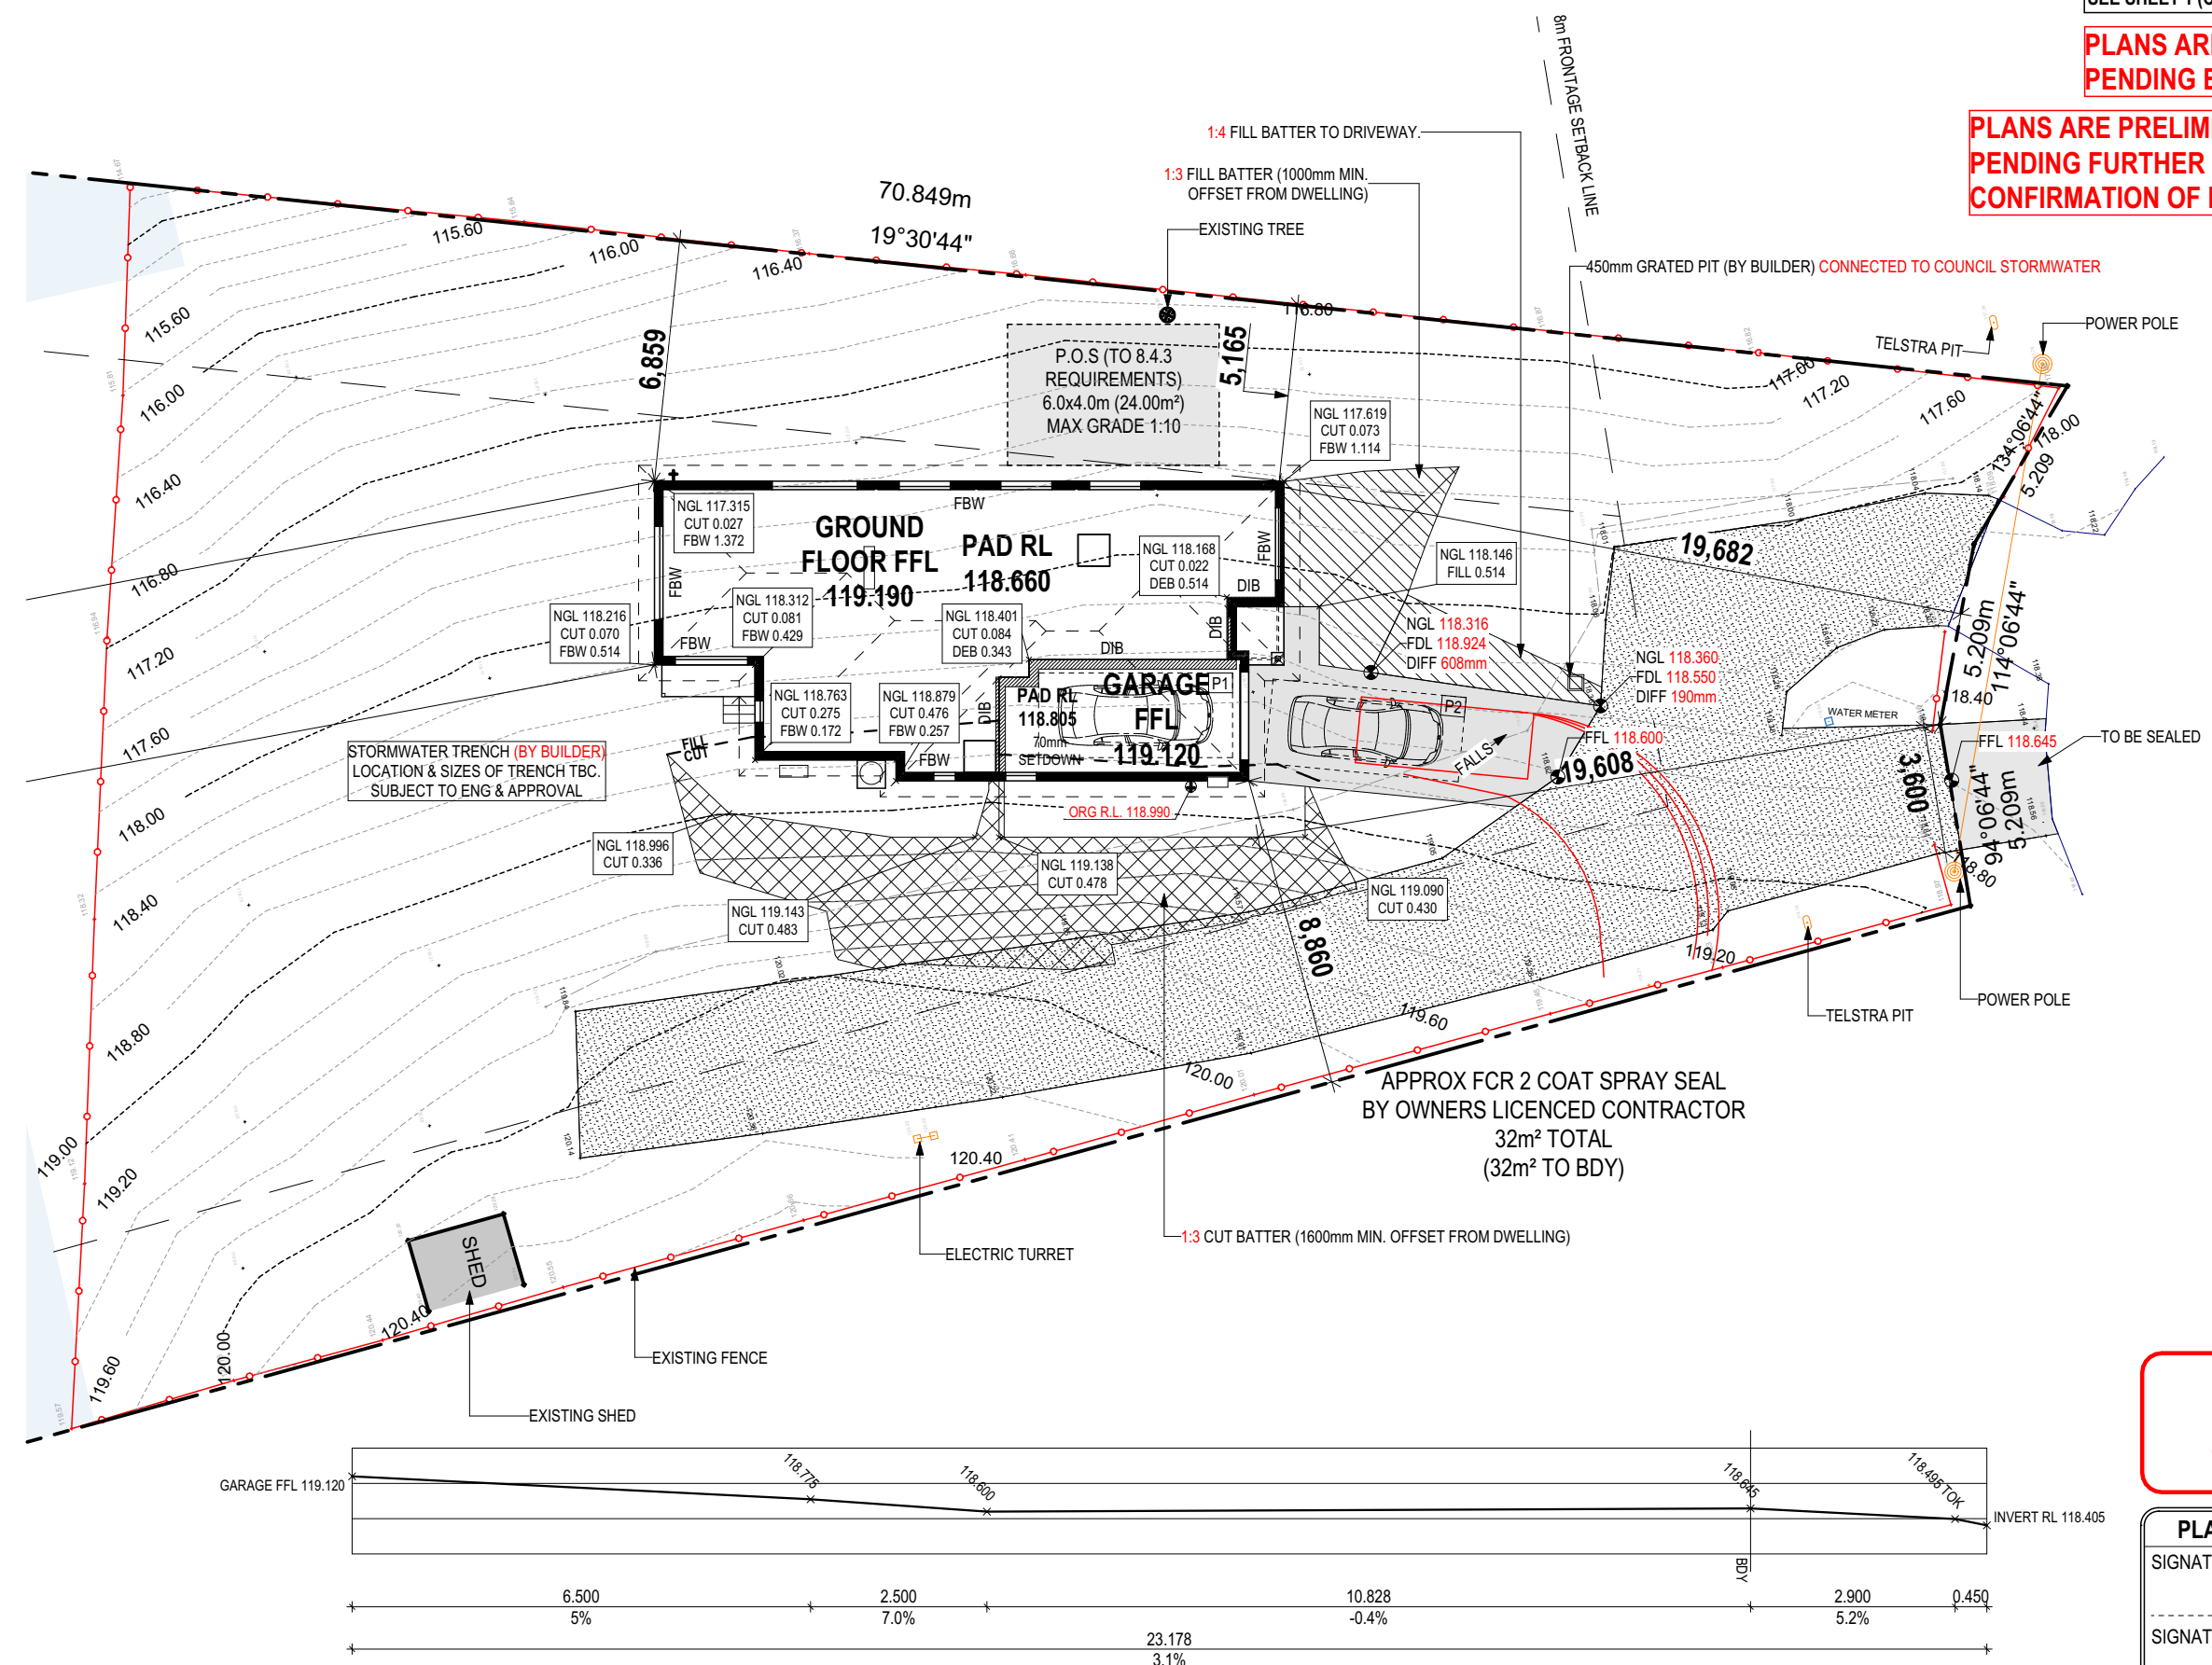

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER	
SIGNATURE:	DATE:
SIGNATURE:	DATE:
PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED	

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.






ALL VEGETATION OUTSIDE THE BUILDING ZONE WILL BE MAINTAINED.

OWNER TO STABILISE THE SITE ON COMPLETION OF THE BUILD WITH TURF LAWNS, GRASS SEEDS, NATIVE GROUND COVERS AND/ OR MULCH SPREAD TO A DEPTH OF 75-100mm

THE FOLLOWING IS A STANDARD APPROACH. SEDIMENT AND EROSION CONTROL MEASURES WILL BE REVIEWED PRIOR TO COMMENCING WORK AND INSTALLED BASED ON THE OUTCOME OF THAT REVIEW.

- NOTES:
1. ALL EROSION AND SEDIMENT CONTROL STRUCTURES TO BE INSPECTED EACH WORKING DAY AND MAINTAINED IN GOOD WORKING ORDER.
 2. ALL GROUND COVER VEGETATION OUTSIDE THE IMMEDIATE BUILDING AREA TO BE PRESERVED DURING THE BUILDING PHASE.
 3. ALL EROSION AND SEDIMENT CONROL MEASURES TO BE INSTALLED PRIOR TO COMMENCEMENT OF MAJOR EARTHWORKS.
 4. STOCKPILES OF CLAYEY MATERIAL TO BE COVERED WITH AN IMPERVIOUS SHEET.
 5. ROOF WATER DOWNPIPES TO BE CONNECTED TO THE PERMAMENT UNDERGROUND STORMWATER DRAINAGE SYSTEM AS SOON AS PRACTICAL AFTER THE ROOF IS LAID.

6. DIVERSION DRAINS ARE TO BE CONNECTED TO A LEAGAL DISCHARGE POINT (COUNCIL STORMWATER SYSTEM, WATERCOURSE OR ROAD DRAIN).
7. SEDIMENT RETENTION TRAPS INSTALLED AROUND THE INLETS TO THE STORMWATER SYSTEM TO PREVENT SEDIMENT & OTHER DEBRIS BLOCKING THE DRAINS.

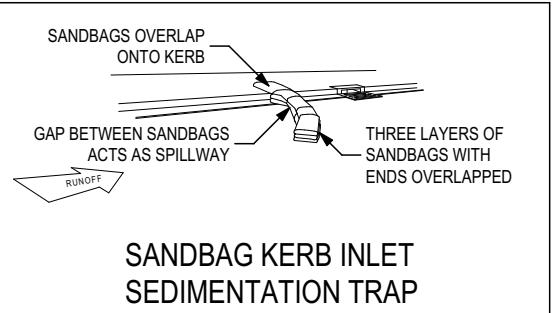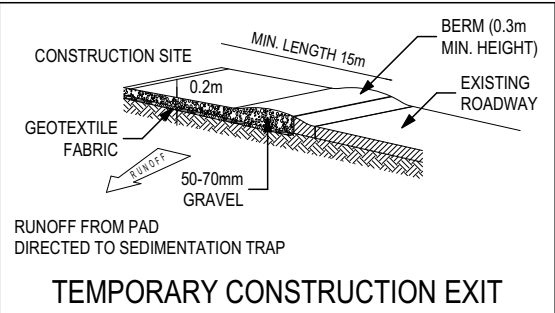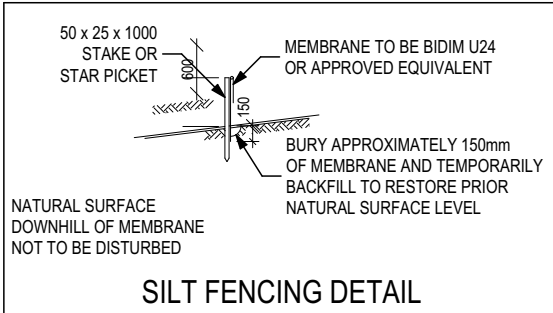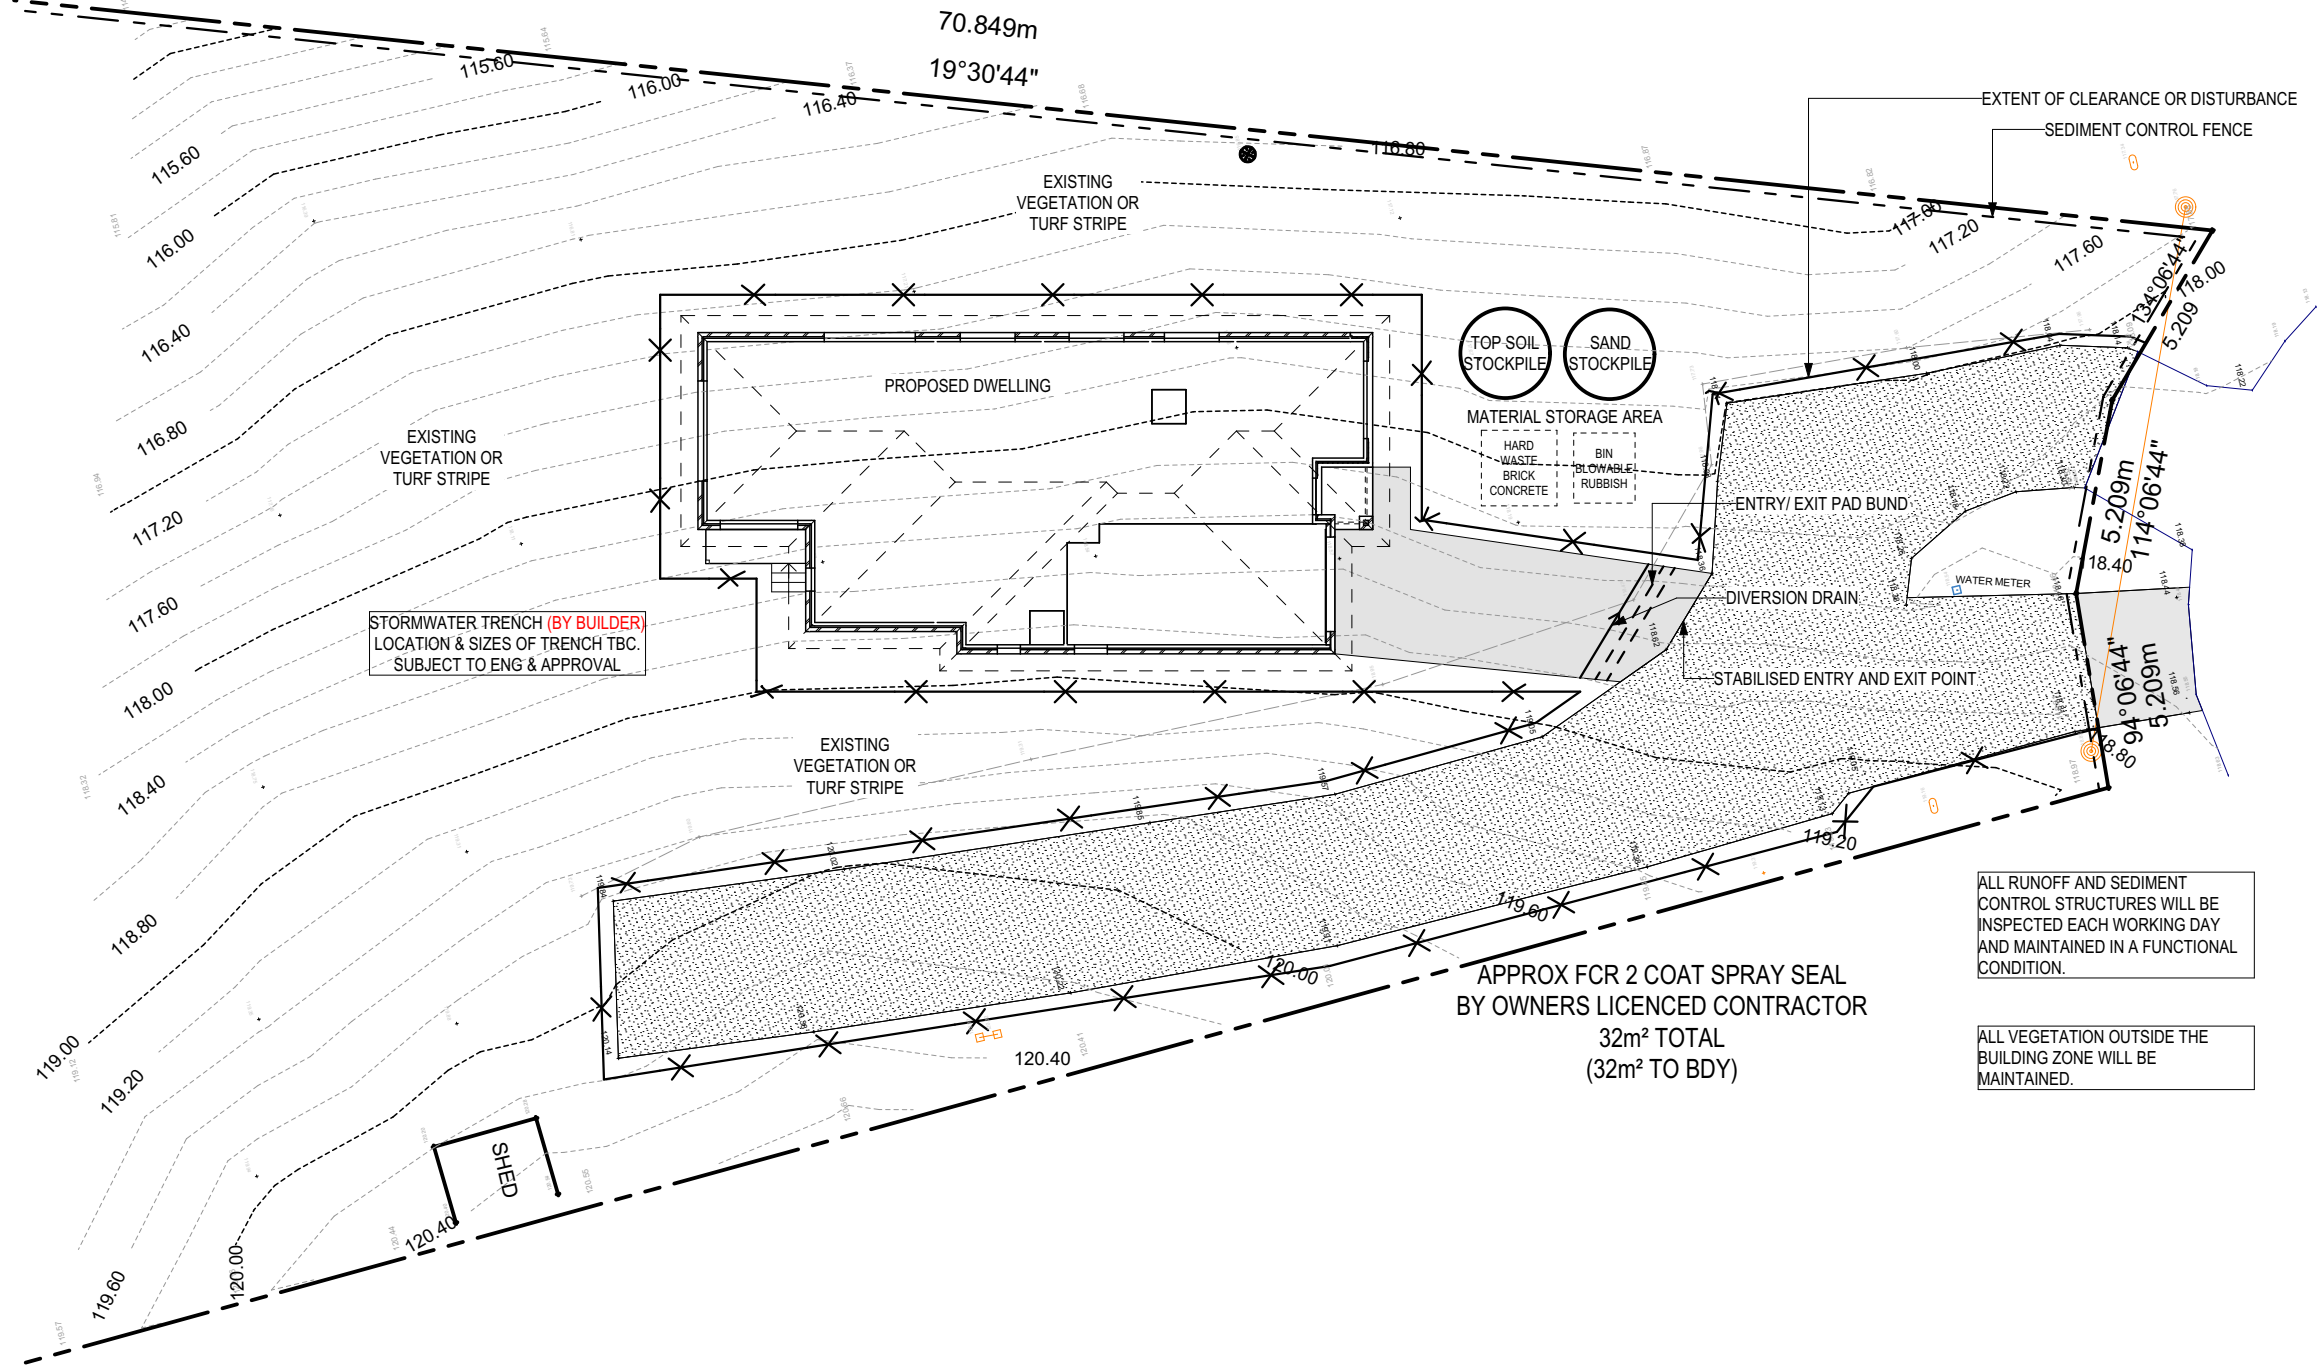

ALL RUNOFF AND SEDIMENT CONTROL STRUCTURES WILL BE INSPECTED EACH WORKING DAY AND MAINTAINED IN A FUNCTIONAL CONDITION.

ALL VEGETATION OUTSIDE THE BUILDING ZONE WILL BE MAINTAINED.

SUBJECT TO NCC 2022 (1 MAY 2023)

WATERPROOFING & PLUMBING CONDENSATION MANAGEMENT LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: _____ DATE: _____

SIGNATURE: _____ DATE: _____

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED



SPECIFICATION:	REVISION	DRAWN	CLIENT:	HOUSE DESIGN:	HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
NOW BY WILSON HOMES	1 SITE PLAN	MFC 02/04/2026	ROBERT DAVIS	AUGUSTA 15	H-WNWAUG10SA	
COPYRIGHT:	2 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	ADDRESS:	FACADE DESIGN:	FACADE CODE:	
© 2026	3 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277	OAKWOOD	F-WNWAUG100KWDA	
	4 PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026	LOT / SECTION / CT:	SHEET TITLE:	SHEET No.:	
	5 PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026	92 / - / 38605	SOIL & WATER MANAGEMENT PLAN	3 / 23	714740
			COUNCIL:		SCALES:	
			WEST TAMAR		1:200	

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:

- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

ALL MECHANICAL VENTILATION TO BE DISCHARGED TO OUTDOOR AIR AS PER NCC 2022 REQUIREMENTS

FIRE RESISTANT PLASTERBOARD TO BE INSTALLED BEHIND COOKTOP

ALL GROUND FLOOR BULKHEAD AND SQUARE SET OPENING FRAMES TO BE 2155 ABOVE FFL UNLESS NOTED OTHERWISE

REFER TO WINDOW AND DOOR SCHEDULES FOR FULL DETAILS OF ALL WINDOWS AND DOORS. PLEASE NOTE WINDOW AND DOOR SIZES ARE BASED ON MANUFACTURERS SPECIFICATIONS AT DEPOSIT STAGE AND MAY DIFFER SLIGHTLY TO THE SIZES NOMINATED IN THE SCOPE OF WORKS DUE TO MANUFACTURING CHANGES AT THE TIME OF CONSTRUCTION.

FINAL WINDOW AND EXTERIOR DOOR LOCATIONS MAY BE ADJUSTED ON SITE TO SUIT BRICKWORK GAUGE
ALL STAIR TREADS TO PROVIDE A MINIMUM SLIP RESISTANCE TO MEET NCC 2022 REQUIREMENTS

UNLESS NOTED OTHERWISE ALL ROOMS ARE REFERENCED AS FOLLOWS:



LEGEND

HS / WS	HOB SPOUT / WALL SPOUT
	FACE BRICK / COMMON BRICK
	RENDER
	SOUND INSULATION
AJ	BRICK ARTICULATION JOINT
SDP	STANDARD DOWNPIPE
CDP	CHARGED DOWNPIPE
	DENOTES DRAWER SIDE
	MECHANICAL VENTILATION
L.B.W	LOAD BEARING WALL
PB	PLASTERBOARD
FC	FIBRE CEMENT
	THIS DOOR OPENS FIRST
	SMOKE ALARM
#	LIFT OFF HINGE
+	WATER POINT
	FLOOR WASTE
	GAS BAYONET


MAIN DWELLING, GROUND FLOOR

GARAGE	24.89
LANDING	2.38
LIVING	109.72
PORCH	2.09
	139.08 m²

PROVIDE AND INSTALL SINGLE PHASE SPLIT SYSTEM AIR CONDITIONER. EXACT LOCATION TO BE DETERMINED IN CONJUNCTION WITH CONTRACTORS RECOMMENDATIONS AND/OR ANY CONSTRUCTION CONSTRAINTS.

ANY PART OF THE FASCIA, GUTTERING OR DOWNPIPE THAT IS WITHIN 450mm OF ANY BOUNDARY IS TO BE NON-COMBUSTIBLE IN ACCORDANCE WITH NCC 2022

ALL EXTERIOR SLABS TO BE GRADED BY CONCRETER TO ACHIEVE APPROX. 1:100 FALL TO OUTSIDE EDGE WITH MAXIMUM CROSSFALL OF 30mm OVER ENTIRE SLAB.

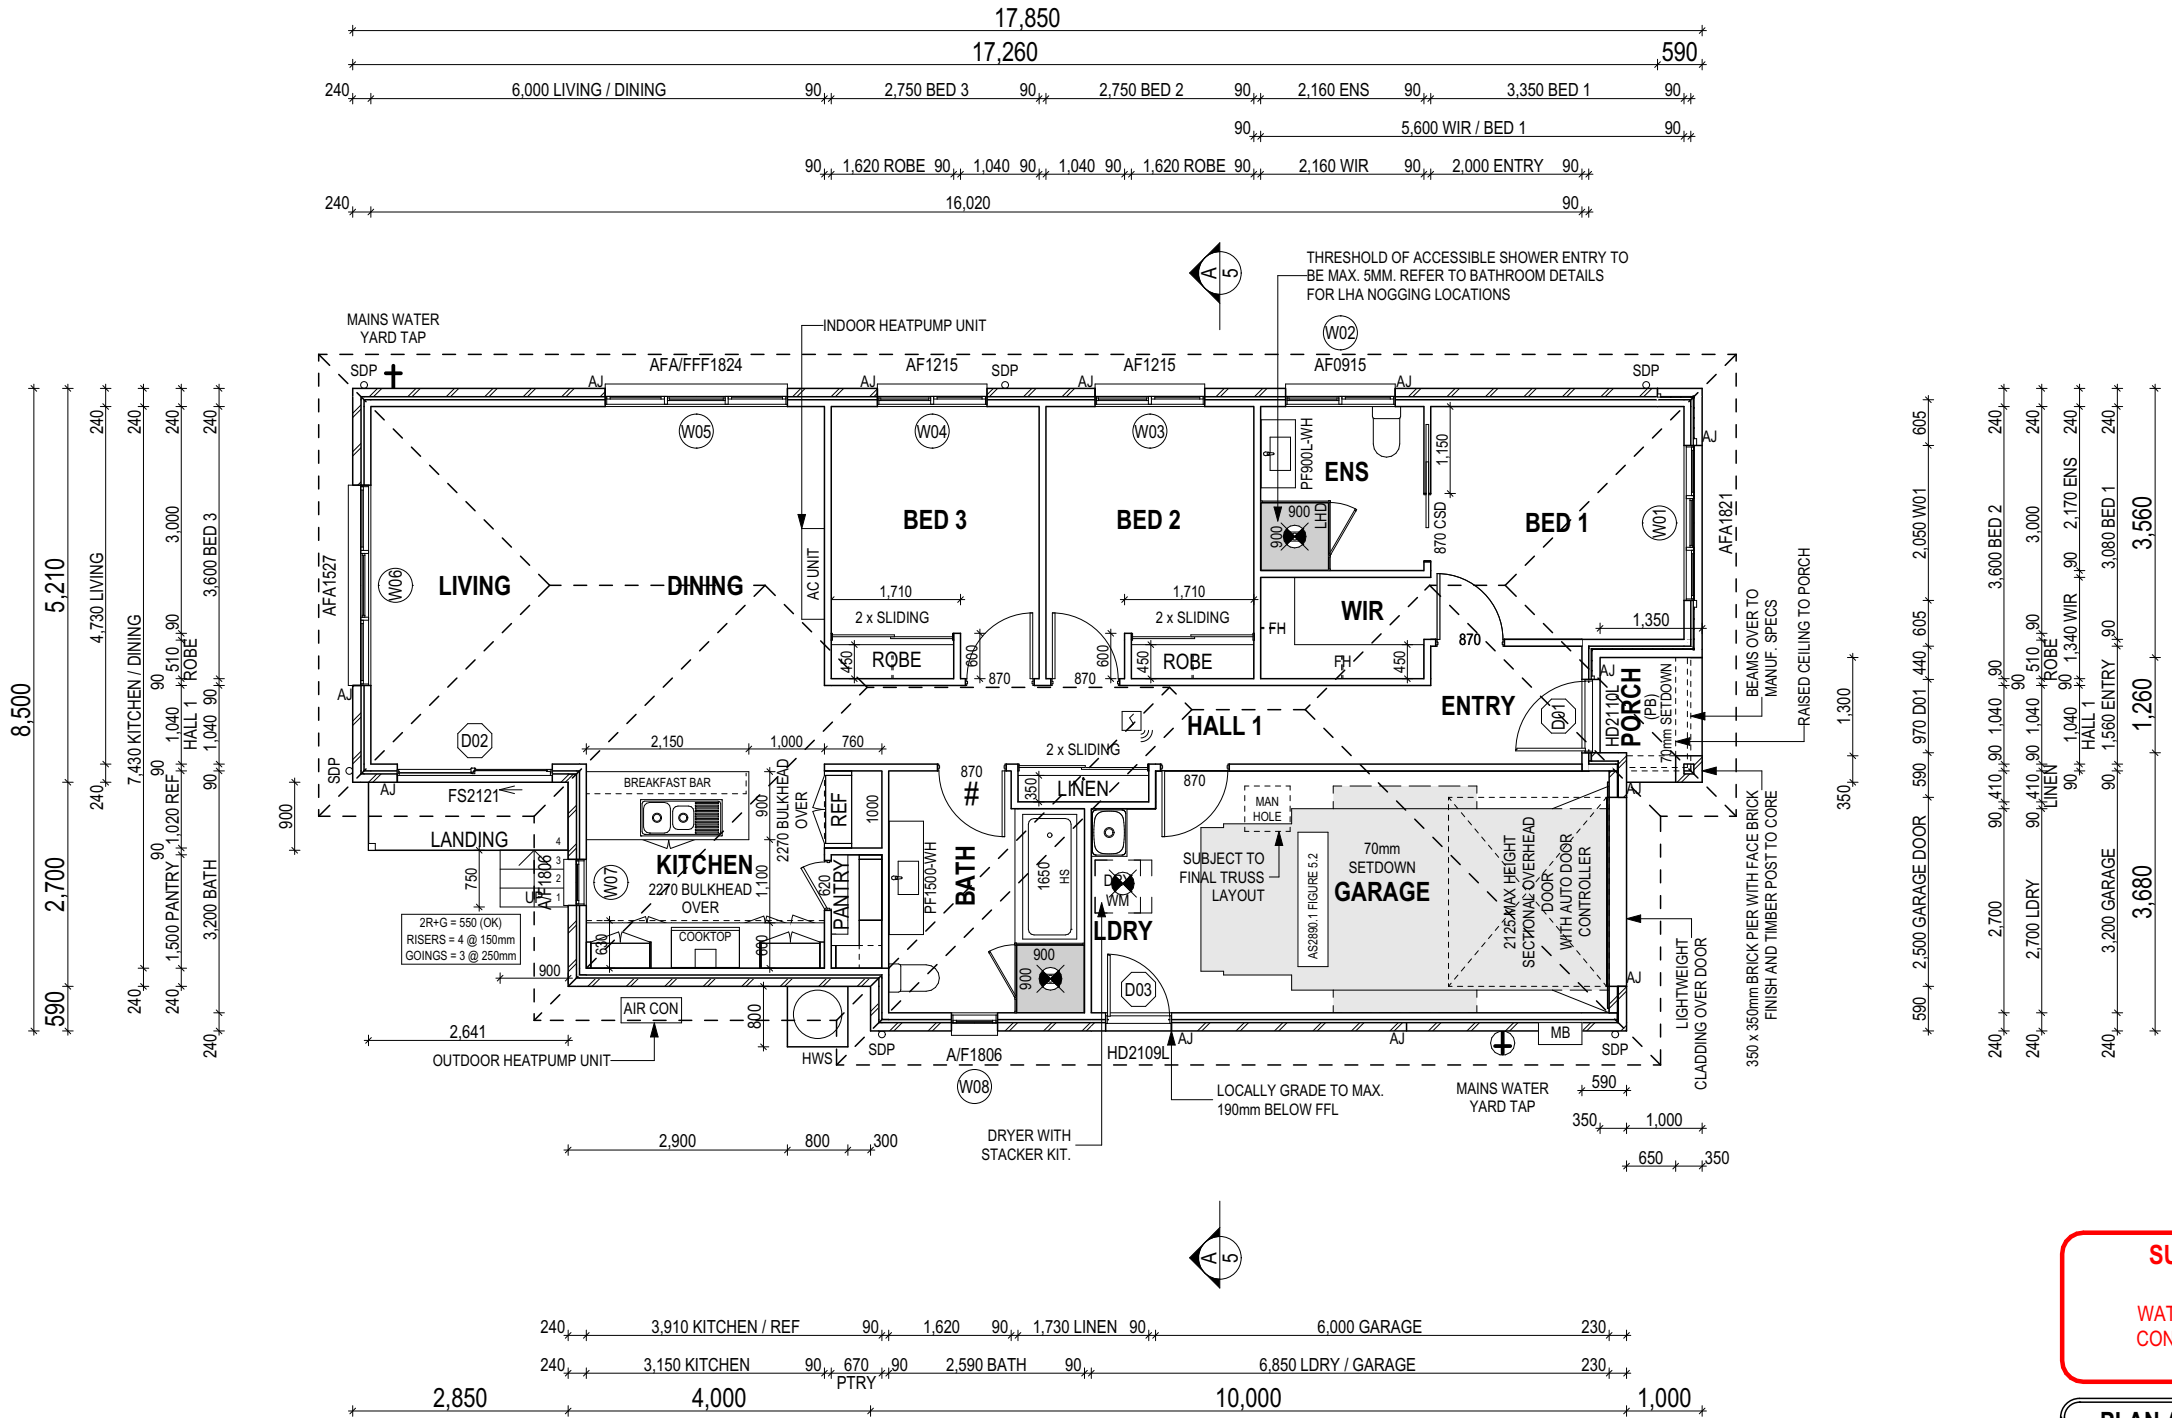

ALL DIMENSIONS ARE FRAME DIMENSIONS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:


SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED




SPECIFICATION: NOW BY WILSON HOMES	REVISION	DRAWN	CLIENT: ROBERT DAVIS	HOUSE DESIGN: AUGUSTA 15	HOUSE CODE: H-WNWAUG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE. 714740
COPYRIGHT: © 2026	1 SITE PLAN	MFC 02/04/2026	ADDRESS: 8 MURRUMBUNG CT, GRINDELWALD TAS 7277	FACADE DESIGN: OAKWOOD	FACADE CODE: F-WNWAUG100KWDA	
	2 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	LOT / SECTION / CT: 92 / - / 38605	SHEET TITLE: GROUND FLOOR PLAN	SHEET No.: 4 / 23	
	3 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	COUNCIL: WEST TAMAR		SCALES: 1:100	
	4 PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026				
	5 PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026				

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

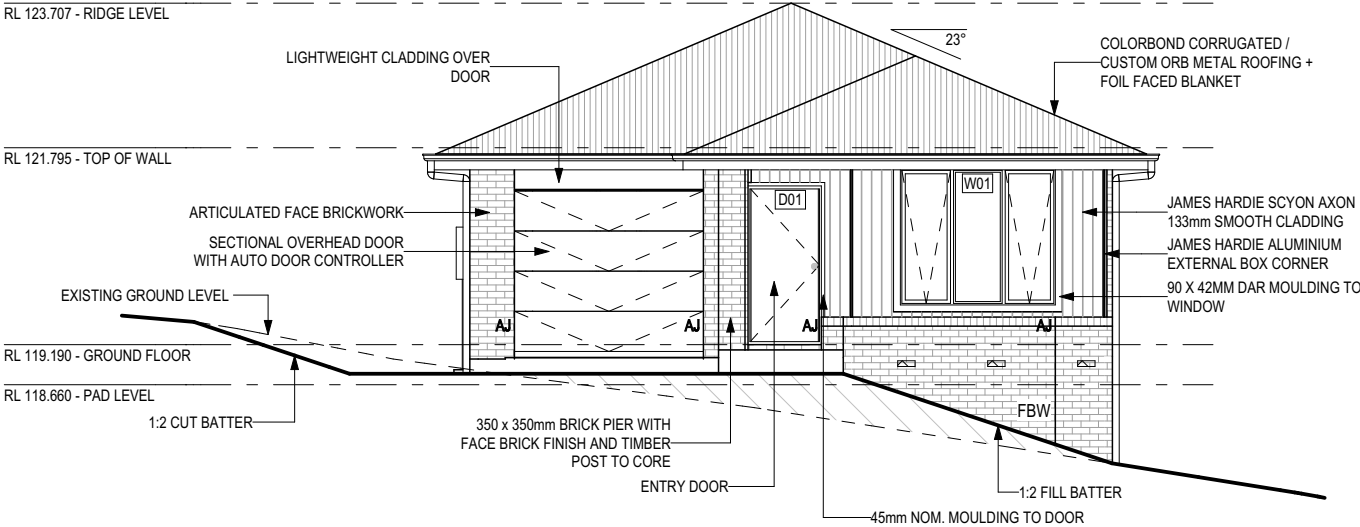

SOUTH ELEVATION
SCALE: 1:100

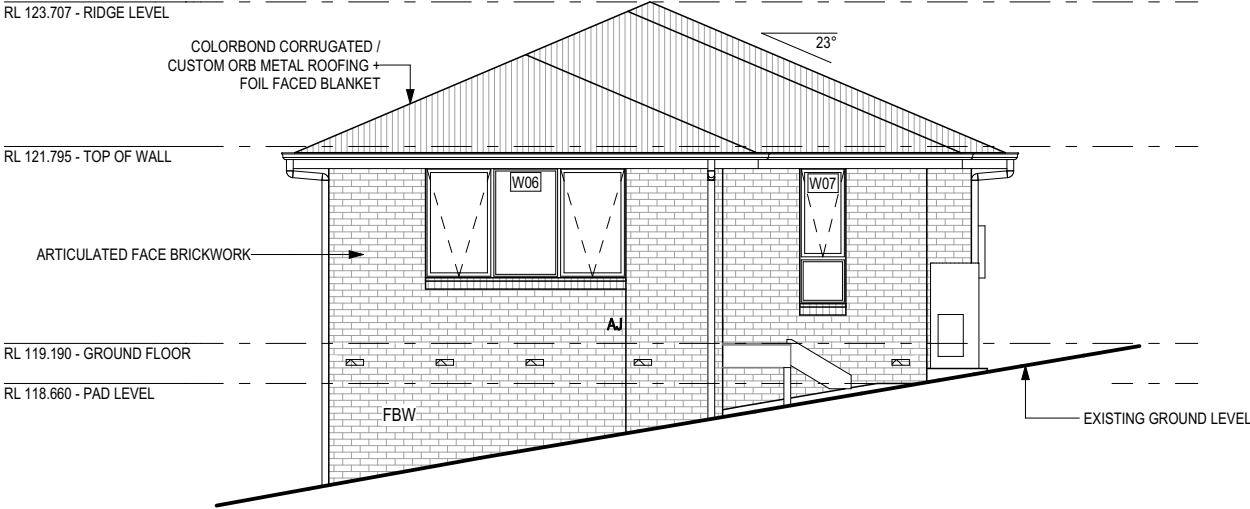

NORTH ELEVATION
SCALE: 1:100

 SUB-FLOOR VENT
PROVIDE SUBFLOOR VENTILATION AT
MAX. 600mm FROM CORNERS AND
EVENLY SPACED (REFER NCC FOR
FURTHER DETAIL).
FINAL LOCATIONS MAY BE ADJUSTED
TO SUIT BRICKWORK GUAGE.

REFER TO SHEET 1 (COVER SHEET) FOR
ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION


SOME DETAILS ON THIS SHEET ARE
INDICATIVE ONLY FOR EXAMPLE
BRICKWORK AND CLADDING (EXPANSION
JOINTS, ORIENTATION AND LAYOUT) AND
ARE SUBJECT TO CHANGE.

SH = SNAP HEADER SILL

BEDROOM WINDOW OPENINGS
ABOVE 2m OFF THE SURFACE
BENEATH TO BE RESTRICTED AS
REQUIRED BY NCC 11.3.7 (VOLUME
TWO)

ROOMS OTHER THAN BEDROOM
WINDOW OPENINGS ABOVE 4m OFF
THE SURFACE BENEATH TO BE
RESTRICTED AS REQUIRED BY NCC
11.3.7 (VOLUME TWO)

REFER TO THE FOLLOWING DETAILS:
BRICK COURSING **W-BRIC-001**

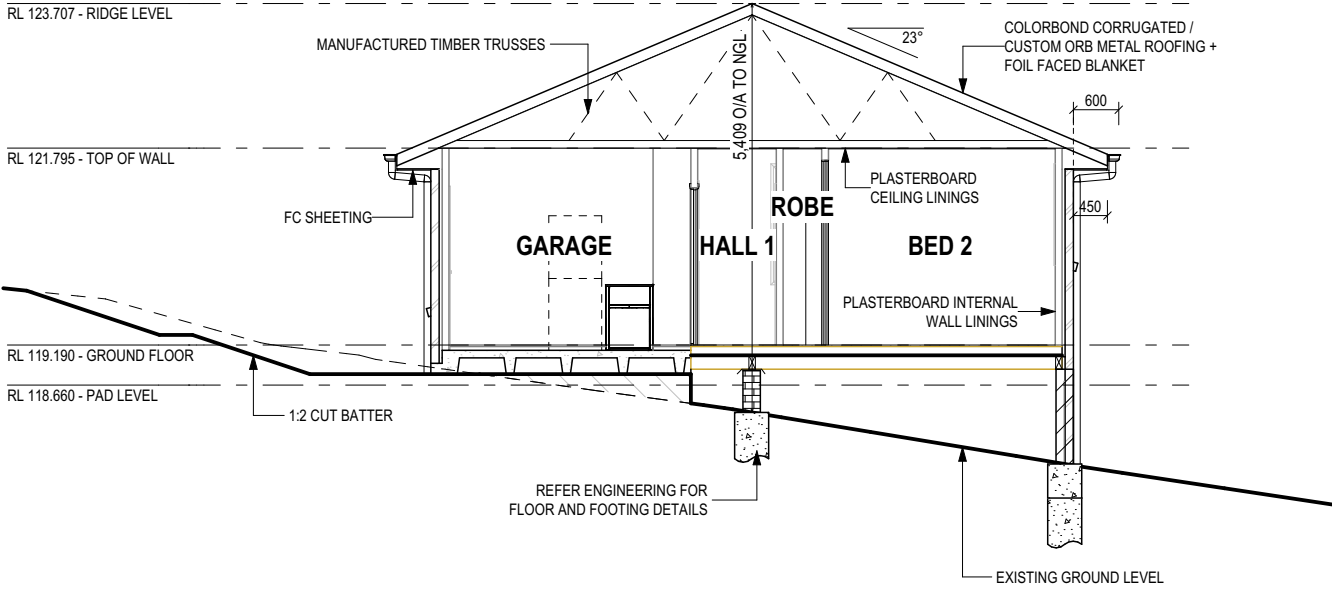

GROUND CLEARANCE IN ACCORDANCE WITH NCC TABLE 3.4.1.2 FOR CLIMATIC ZONE C TO BE
150mm FOR THE FIRST 2m THEN 400mm CLEARANCE FOR ACCESS TO SERVICES.



SECTION A-A
SCALE: 1:100

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

GLASS TYPE LEGEND

	
CLEAR	OBSCURE

WINDOW TYPE LEGEND

				
AWNING	DOUBLE HUNG	FIXED	LOUVRE	SLIDING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: _____	DATE: _____
SIGNATURE: _____	DATE: _____

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT
IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

NOW
by Wilson Homes

SPECIFICATION:
NOW BY WILSON HOMES
COPYRIGHT:
© 2026

REVISION		DRAWN	
1	SITE PLAN	MFC	02/04/2026
2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	15/05/2026
3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	28/05/2026
4	PRELIM PLANS - INITIAL ISSUE	TDI	12/06/2026
5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG	30/07/2026

CLIENT:
ROBERT DAVIS
ADDRESS:
8 MURRUMBUNG CT, GRINDELWALD TAS 7277
LOT / SECTION / CT:
92 / - / 38605
COUNCIL:
WEST TAMAR

HOUSE DESIGN:
AUGUSTA 15
FACADE DESIGN:
OAKWOOD
SHEET TITLE:
ELEVATIONS / SECTION

HOUSE CODE:
H-WNWAUG10SA
FACADE CODE:
F-WNWAUG10OKWDA
SHEET No.:
5 / 23
SCALES:
1:100

DO NOT SCALE DRAWINGS. USE
FIGURED DIMENSIONS ONLY. CHECK
AND VERIFY DIMENSIONS AND
LEVELS PRIOR TO THE
COMMENCEMENT OF ANY WORK. ALL
DISCREPANCIES TO BE REPORTED
TO THE DRAFTING OFFICE.
714740

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

PROVIDE SUBFLOOR VENTILATION AT MAX. 600mm FROM CORNERS AND EVENLY SPACED (REFER NCC FOR FURTHER DETAIL).
FINAL LOCATIONS MAY BE ADJUSTED TO SUIT BRICKWORK GUAGE.

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION


SOME DETAILS ON THIS SHEET ARE INDICATIVE ONLY FOR EXAMPLE BRICKWORK AND CLADDING (EXPANSION JOINTS, ORIENTATION AND LAYOUT) AND ARE SUBJECT TO CHANGE.

SH = SNAP HEADER SILL


BEDROOM WINDOW OPENINGS ABOVE 2m OFF THE SURFACE BENEATH TO BE RESTRICTED AS REQUIRED BY NCC 11.3.7 (VOLUME TWO)

ROOMS OTHER THAN BEDROOM WINDOW OPENINGS ABOVE 4m OFF THE SURFACE BENEATH TO BE RESTRICTED AS REQUIRED BY NCC 11.3.7 (VOLUME TWO)

REFER TO THE FOLLOWING DETAILS:
BRICK COURSING W-BRIC-001

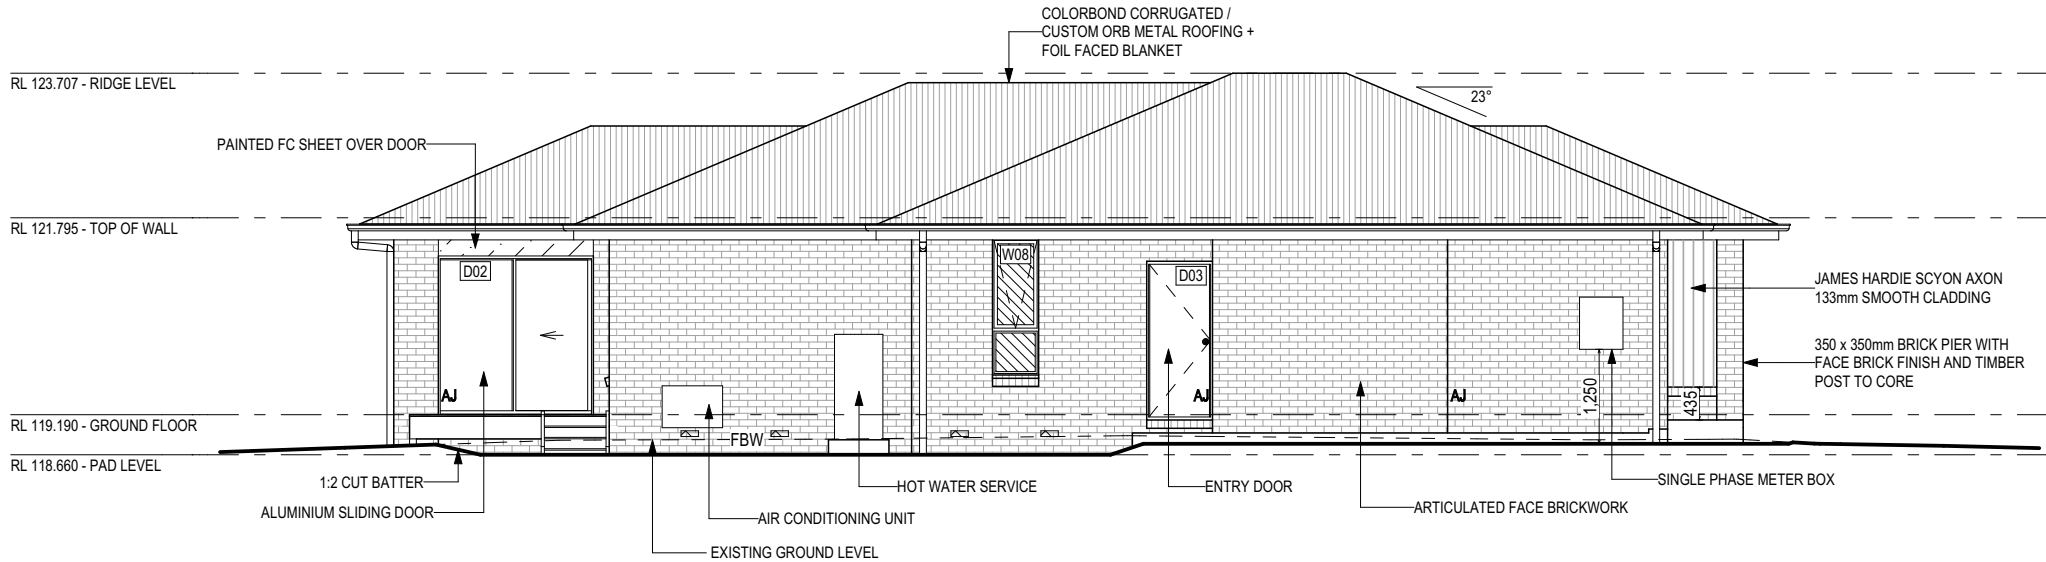


WEST ELEVATION
SCALE: 1:100

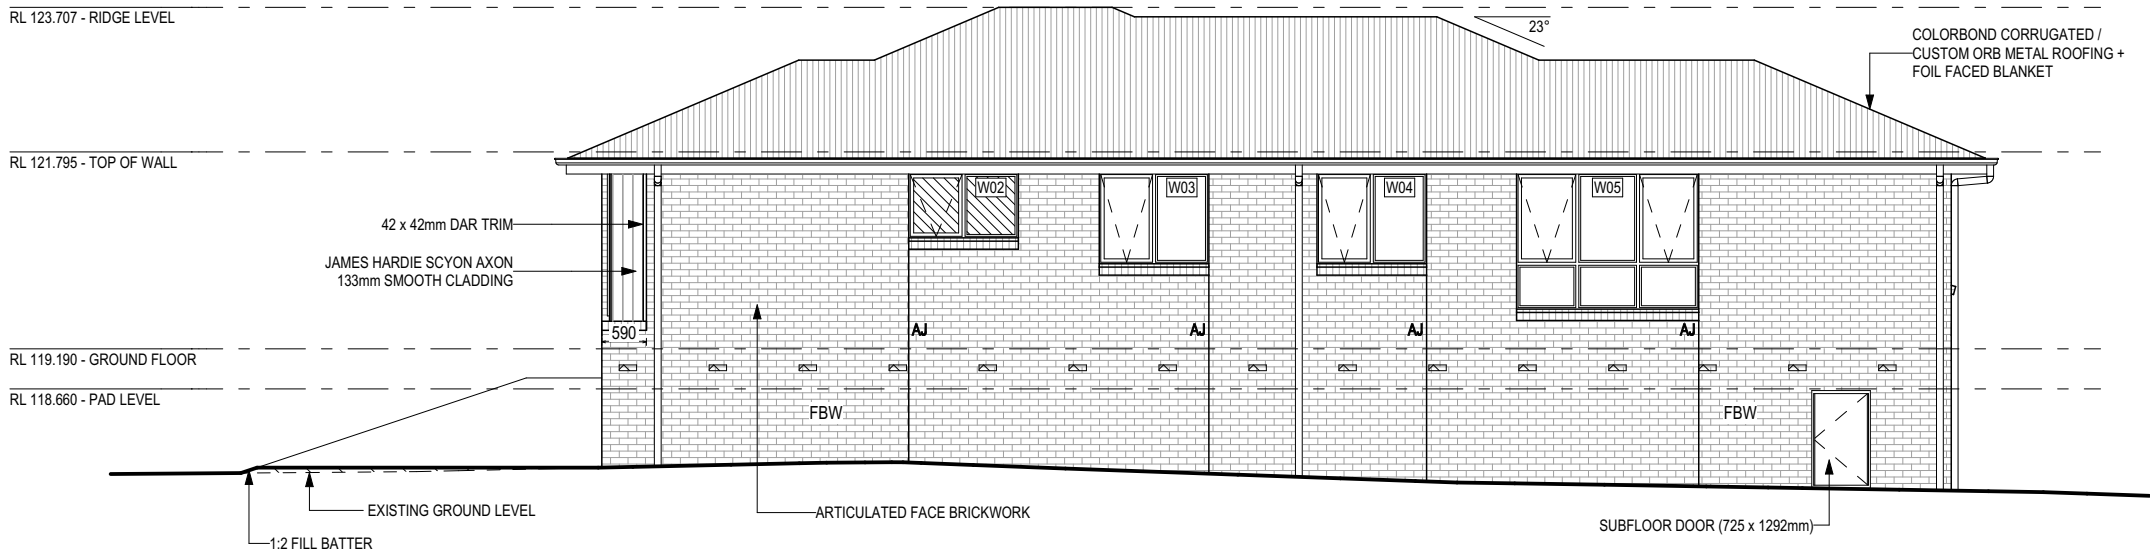


EAST ELEVATION
SCALE: 1:100

GLASS TYPE LEGEND



WINDOW TYPE LEGEND

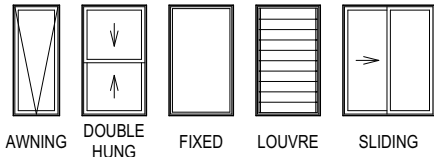

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION: NOW BY WILSON HOMES	REVISION	DRAWN	CLIENT: ROBERT DAVIS	HOUSE DESIGN: AUGUSTA 15	HOUSE CODE: H-WNWAUG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
COPYRIGHT: © 2026	1 SITE PLAN	MFC 02/04/2026	ADDRESS: 8 MURRUMBUNG CT, GRINDELWALD TAS 7277	FACADE DESIGN: OAKWOOD	FACADE CODE: F-WNWAUG100KWDA	
	2 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	LOT / SECTION / CT: 92 / - / 38605	SHEET TITLE: ELEVATIONS	SHEET No.: 6 / 23	
	3 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	COUNCIL: WEST TAMAR		SCALES: 1:100	
	4 PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026				
	5 PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026				

714740

EXTERIOR WINDOW & DOOR SCHEDULE 1,2 ASSUME LOOKING FROM OUTSIDE

STOREY	ID	CODE¹	TYPE	ROOM	HEIGHT	WIDTH	PERIMETER	AREA (m²)	FRAME TYPE	BAL RATING	SILL TYPE	ORIENT.	GLAZING AREA (m²)	GLAZING TYPE (SINGLE GLAZING U.N.O.)	ADDITIONAL INFORMATION²
WINDOW															
GROUND FLOOR	W01	AFA1821	AWNING	BED 1	1,800	2,050	7,700	3.69	ALUMINIUM	BAL-12.5	NONE	S	2.92	CLEAR, DOUBLE GLAZED	MP 683-683
GROUND FLOOR	W02	AF0915	AWNING	ENS	857	1,450	4,614	1.24	ALUMINIUM	BAL-12.5	ANGLED	E	0.95	OBSCURE, DOUBLE GLAZED, TOUGHENED	MP 725
GROUND FLOOR	W03	AF1215	AWNING	BED 2	1,200	1,450	5,300	1.74	ALUMINIUM	BAL-12.5	ANGLED	E	1.38	CLEAR, DOUBLE GLAZED	MP 725
GROUND FLOOR	W04	AF1215	AWNING	BED 3	1,200	1,450	5,300	1.74	ALUMINIUM	BAL-12.5	ANGLED	E	1.38	CLEAR, DOUBLE GLAZED	MP 725
GROUND FLOOR	W05	AFA/FFF1824	AWNING	DINING	1,800	2,410	8,420	4.34	ALUMINIUM	BAL-12.5	ANGLED	E	3.43	CLEAR, DOUBLE GLAZED	BP 600, MP 803-803/803-803
GROUND FLOOR	W06	AFA1527	AWNING	LIVING	1,457	2,650	8,214	3.86	ALUMINIUM	BAL-12.5	ANGLED	N	3.14	CLEAR, DOUBLE GLAZED	MP 883-883
GROUND FLOOR	W07	A/F1806	AWNING	KITCHEN	1,800	610	4,820	1.10	ALUMINIUM	BAL-12.5	ANGLED	N	0.80	CLEAR, DOUBLE GLAZED	BP 600
GROUND FLOOR	W08	A/F1806	AWNING	BATH	1,800	610	4,820	1.10	ALUMINIUM	BAL-12.5	ANGLED	W	0.80	OBSCURE, DOUBLE GLAZED, TOUGHENED	BP 600
							49,188 mm	18.81					14.80		
DOOR															
GROUND FLOOR	D01	HD2110L	SWINGING	ENTRY	2,100	970	6,140	2.04	ALUMINIUM	BAL-12.5	NONE	S	1.41	N/A	
GROUND FLOOR	D02	FS2121	SLIDING	LIVING	2,100	2,050	8,300	4.31	ALUMINIUM	BAL-12.5	SNAP HEADER	W	3.79	CLEAR, DOUBLE GLAZED, TOUGHENED	
GROUND FLOOR	D03	HD2109L	SWINGING	GARAGE	2,100	870	5,940	1.83	ALUMINIUM	BAL-12.5	SNAP HEADER	W	1.22	N/A	
							20,380 mm	8.17					6.41		
							69,568 mm	26.98					21.21		

NOTE:
Provide BAL-12.5 rated aluminium windows and external glass sliding doors in lieu of standard.

Provide flyscreens with corrosion resistant mesh to all opening window sashes only.

Window Manufacturer: Dowell Windows			
No BAL / BAL 12.5 Window Type	WERS Code	U Value	SHGC
	DOW-022-003	2.9	0.64
	DOW-005-001	3.9	0.58
	DOW-038-001	3.03	0.71
	DAR-034-001	3.97	0.63
	DAR-034-001	3.97	0.63
	DOW-017-001	4.1	0.55
BAL 19 Window Type	DOW-020-001	4.1	0.54
	WERS Code	U Value	SHGC
	TND-034-001	3.1	0.61
	STG-001-066	3.91	0.54
	DOW-038-005	3.02	0.66
	AUW-009-009	4.03	0.58
	AUW-009-009	4.03	0.58
BAL 29 Window Type	GRN-009-001	4.25	0.53
	DOW-020-001	4.1	0.54
	WERS Code	U Value	SHGC
	TND-034-001	3.1	0.61
	STG-001-066	3.91	0.54
	DOW-038-005	3.02	0.66
	AMJ-007-005	4.03	0.59
Sliding Door	AMJ-007-005	4.03	0.59
	GRN-009-001	4.29	0.53
NOTE: Windows supplied MUST HAVE Uw better and or equal to stated figures and SHGC within +/- 5% of stated figures. Restricted windows to have their openability restricted as per N.C.C 11.3.6.			

PICTURE, TV RECESS AND SS WINDOW OPENINGS				
QTY	TYPE	HEIGHT	WIDTH	AREA (m²)

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE:	DATE:

SIGNATURE:	DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED	

INTERIOR WINDOW & DOOR SCHEDULE

STOREY	QTY	CODE	TYPE	HEIGHT	WIDTH	GLAZING TYPE	ADDITIONAL INFORMATION
DOOR							
GROUND FLOOR	1	2 x SLIDING	SLIDING	2,445	1,730	N/A	
GROUND FLOOR	1	2 x SLIDING	SLIDING	2,445	1,620	N/A	
GROUND FLOOR	1	2 x SLIDING	SLIDING	2,445	1,624	N/A	
GROUND FLOOR	1	620	SWINGING	2,040	620	N/A	
GROUND FLOOR	5	870	SWINGING	2,040	870	N/A	
GROUND FLOOR	1	870	SWINGING	2,040	870	N/A	LIFT-OFF HINGES
GROUND FLOOR	1	870 CSD	CAVITY SLIDING	2,040	870	N/A	

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

NOTE: INTERNAL DOORS TO WET AREAS WITH MECHANICAL VENTILATION TO BE UNDERCUT 20mm

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

NOW

by Wilson Homes

SPECIFICATION: NOW BY WILSON HOMES	REVISION		DRAWN		CLIENT:		HOUSE DESIGN:		HOUSE CODE:		DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.		
COPYRIGHT: © 2026	1	SITE PLAN	MFC	02/04/2026	ROBERT DAVIS		AUGUSTA 15		H-WNWAUG10SA				
	2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	15/05/2026	ADDRESS:		FACADE DESIGN:		FACADE CODE:				
	3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277		OAKWOOD		F-WNWAUG100KWDA				
	4	PRELIM PLANS - INITIAL ISSUE	TDI	12/06/2026	LOT / SECTION / CT:		SHEET TITLE:		SHEET No.:				
	5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG	30/07/2026	92 / - / 38605		COUNCIL: WEST TAMAR		WINDOW & DOOR SCHEDULES		7 / 23	SCALES:	714740

NATURAL LIGHT AND VENTILATION

ROOM	AREA (m2)	WINDOW ID	LIGHT REQUIRED (m2)	LIGHT ACHIEVED (m2)	VENTILATION REQ'D (m2)	VENTILATION ACH'D (m2)
OPEN KITCHEN/ LIVING/ DINING	37.67 m²	W05, W06, W07, D02	3.77 m²	11.16 m²	1.88 m²	6.84 m²
BED 1	10.32 m²	W01	1.03 m²	2.92 m²	0.52 m²	2.26 m²
BED 2	9.70 m²	W03	0.97 m²	1.38 m²	0.49 m²	0.79 m²
BED 3	9.70 m²	W04	0.97 m²	1.38 m²	0.49 m²	0.79 m²

PART 10.5.1 LIGHT: Minimum 10% of the floor area of a habitable room required (natural light)

PART 10.6 VENTILATION: Minimum 5% of the floor area of a habitable room required. (An exhaust fan may be used for sanitary compartment, laundry or bathroom provided contaminated air discharges directly to the outside of the building by way of ducts).

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:

- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: _____	DATE: _____
SIGNATURE: _____	DATE: _____

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

	SPECIFICATION: NOW BY WILSON HOMES		REVISION	DRAWN	CLIENT: ROBERT DAVIS	HOUSE DESIGN: AUGUSTA 15	HOUSE CODE: H-WNWAUG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE. 714740
	COPYRIGHT: © 2026	1	SITE PLAN	MFC 02/04/2026	ADDRESS: 8 MURRUMBUNG CT, GRINDELWALD TAS 7277	FACADE DESIGN: OAKWOOD	FACADE CODE: F-WNWAUG10OKWDA	
		2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	LOT / SECTION / CT: 92 / - / 38605	SHEET TITLE: CALCULATIONS	SCALES:	
		3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	COUNCIL: WEST TAMAR	SHEET No.: 8 / 23		
		4	PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026				
		5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026				



NOT OFTEN REQUIRED. IF NEEDED ADD 20 TO LENGTH.



PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

DO NOT SCALE DRAWINGS, USE
FIGURED DIMENSIONS ONLY. CHECK
AND VERIFY DIMENSIONS AND
LEVELS PRIOR TO THE
COMMENCEMENT OF ANY WORK. ALL
DISCREPANCIES TO BE REPORTED
TO THE DRAFTING OFFICE.

REFER TO W-CLAD-001 & W-CLAD-002 FOR FULL DETAIL

SHEET CLADDING

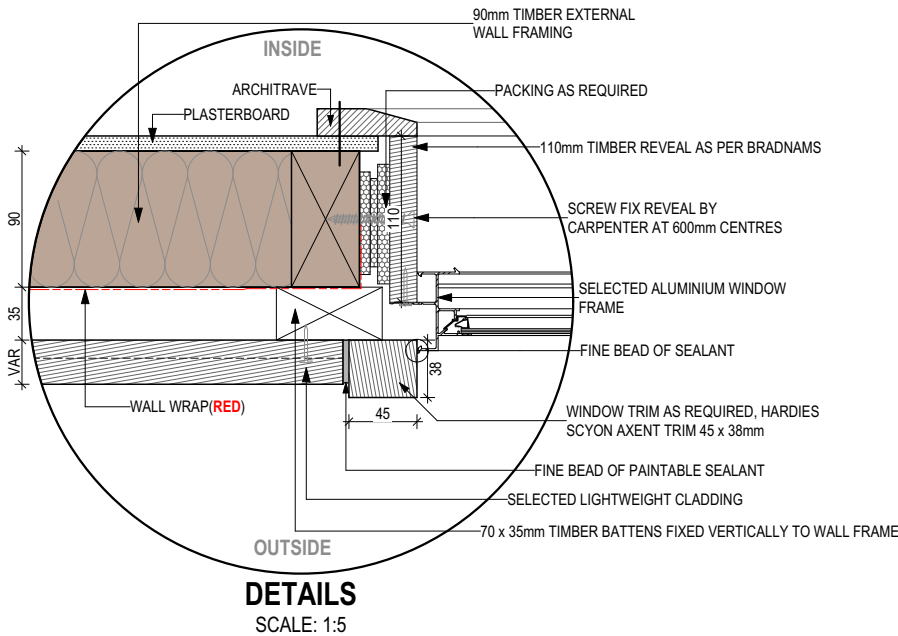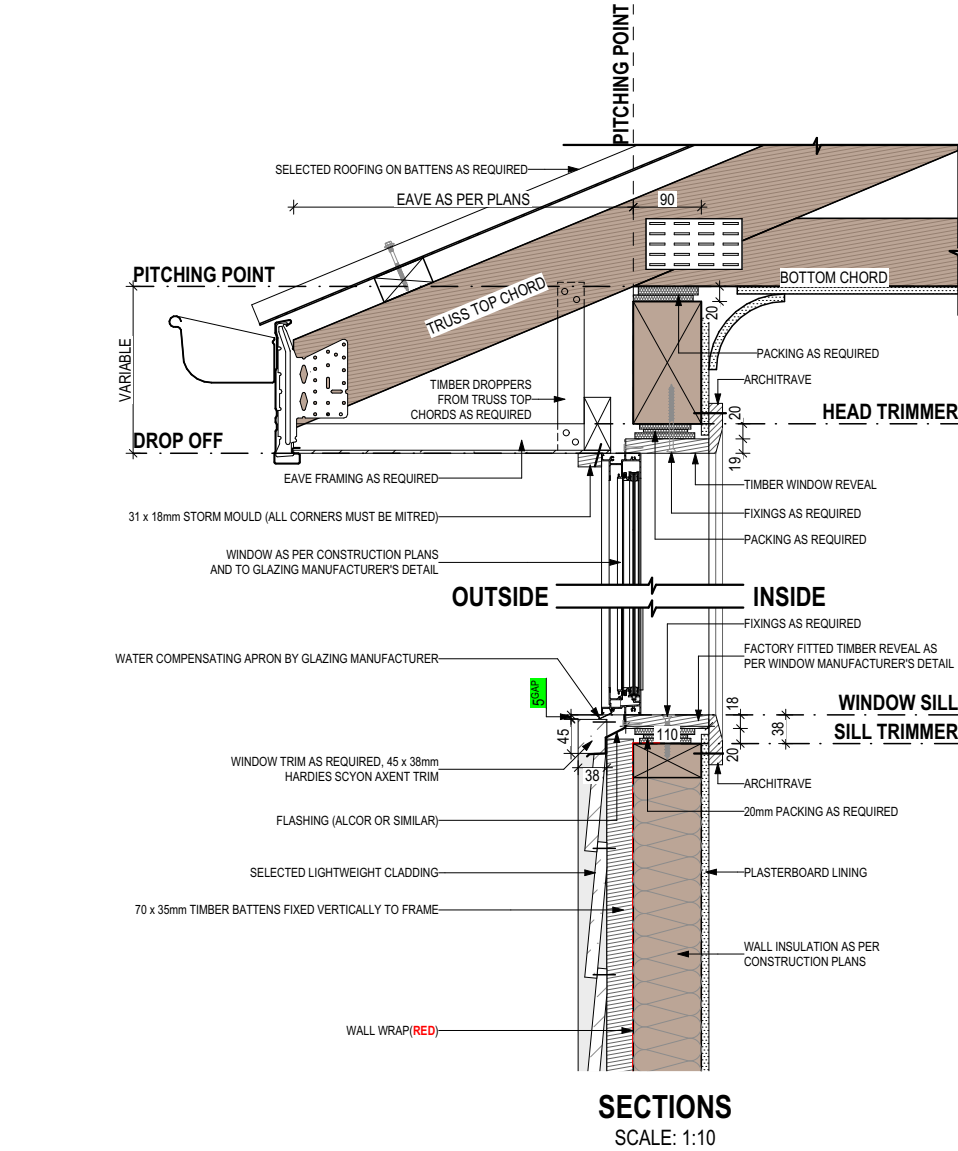

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE:	DATE:

SIGNATURE:	DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED	



SPECIFICATION:	REVISION		DRAWN		CLIENT:		HOUSE DESIGN:		HOUSE CODE:		DO NOT SCALE DRAWINGS, USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
NOW BY WILSON HOMES	1	SITE PLAN	MFC	02/04/2026	ROBERT DAVIS		AUGUSTA 15		H-WNWAUG10SA		
COPYRIGHT:	2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	15/05/2026	ADDRESS:		FACADE DESIGN:		FACADE CODE:		
© 2026	3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277		OAKWOOD		F-WNWAUG100KWDA		
	4	PRELIM PLANS - INITIAL ISSUE	TDI	12/06/2026	LOT / SECTION / CT:		SHEET TITLE:		SHEET No.:	SCALES:	
	5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG	30/07/2026	92 / - / 38605		WEST TAMAR		10 / 23		

WHERE DOWNPIPES ARE FURTHER THAN 1.2m AWAY FROM VALLEY REFER TO N.C.C. 7.3.5(2)

POSITION AND QUALITY OF DOWNPIPES ARE NOT TO BE ALTERED WITHOUT CONSULTATION WITH DESIGNER.


AREA'S SHOWN ARE SURFACE AREAS/ CATCHMENT AREAS, NOT PLAN AREAS

Roofing Data		
	161.22	Flat Roof Area (excluding gutter and slope factor) (m ²)
	175.15	Roof Surface Area (includes slope factor, excludes gutter) (m ²)
Downpipe roof calculations (as per AS/NZA3500.3:2021)		
Ah	171.24	Area of roof catchment (including 115mm Slotted Quad Gutter) (m ²)
Ac	207.20	Ah x Catchment Area Multiplier for slope (Table 3.4.3.2 from AS/NZS 3500.3:2021) (1.21 for 23° pitch) (m ²)
Ae	6300	Cross sectional area of 57 x 115 Slotted Quad Gutter (mm ²)
DRI	91	Design Rainfall Intensity (determined from Table E1 from AS/NZS 3500.3:2021)
Acdp	64	Catchment area per Downpipe (determined from Figure 3.5(A) from AS/NZS 3500.3:2021) (m ²)
Required Downpipes	3.24	Ac / Acdp
Downpipes Provided	6	

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION: NOW BY WILSON HOMES COPYRIGHT: © 2026	REVISION		DRAWN		CLIENT:		HOUSE DESIGN:		HOUSE CODE:		DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.		
	1	SITE PLAN	MFC	02/04/2026	ROBERT DAVIS		AUGUSTA 15		H-WNWAUG10SA				
	2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	15/05/2026	ADDRESS:		FACADE DESIGN:		FACADE CODE:				
	3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277		OAKWOOD		F-WNWAUG100KWDA				
	4	PRELIM PLANS - INITIAL ISSUE	TDI	12/06/2026	LOT / SECTION / CT:	COUNCIL:	SHEET TITLE:	SHEET No.:	SCALES:				
	5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG	30/07/2026	92 / - / 38605		WEST TAMAR		ROOF DRAINAGE PLAN		11 / 23	1:100	714740

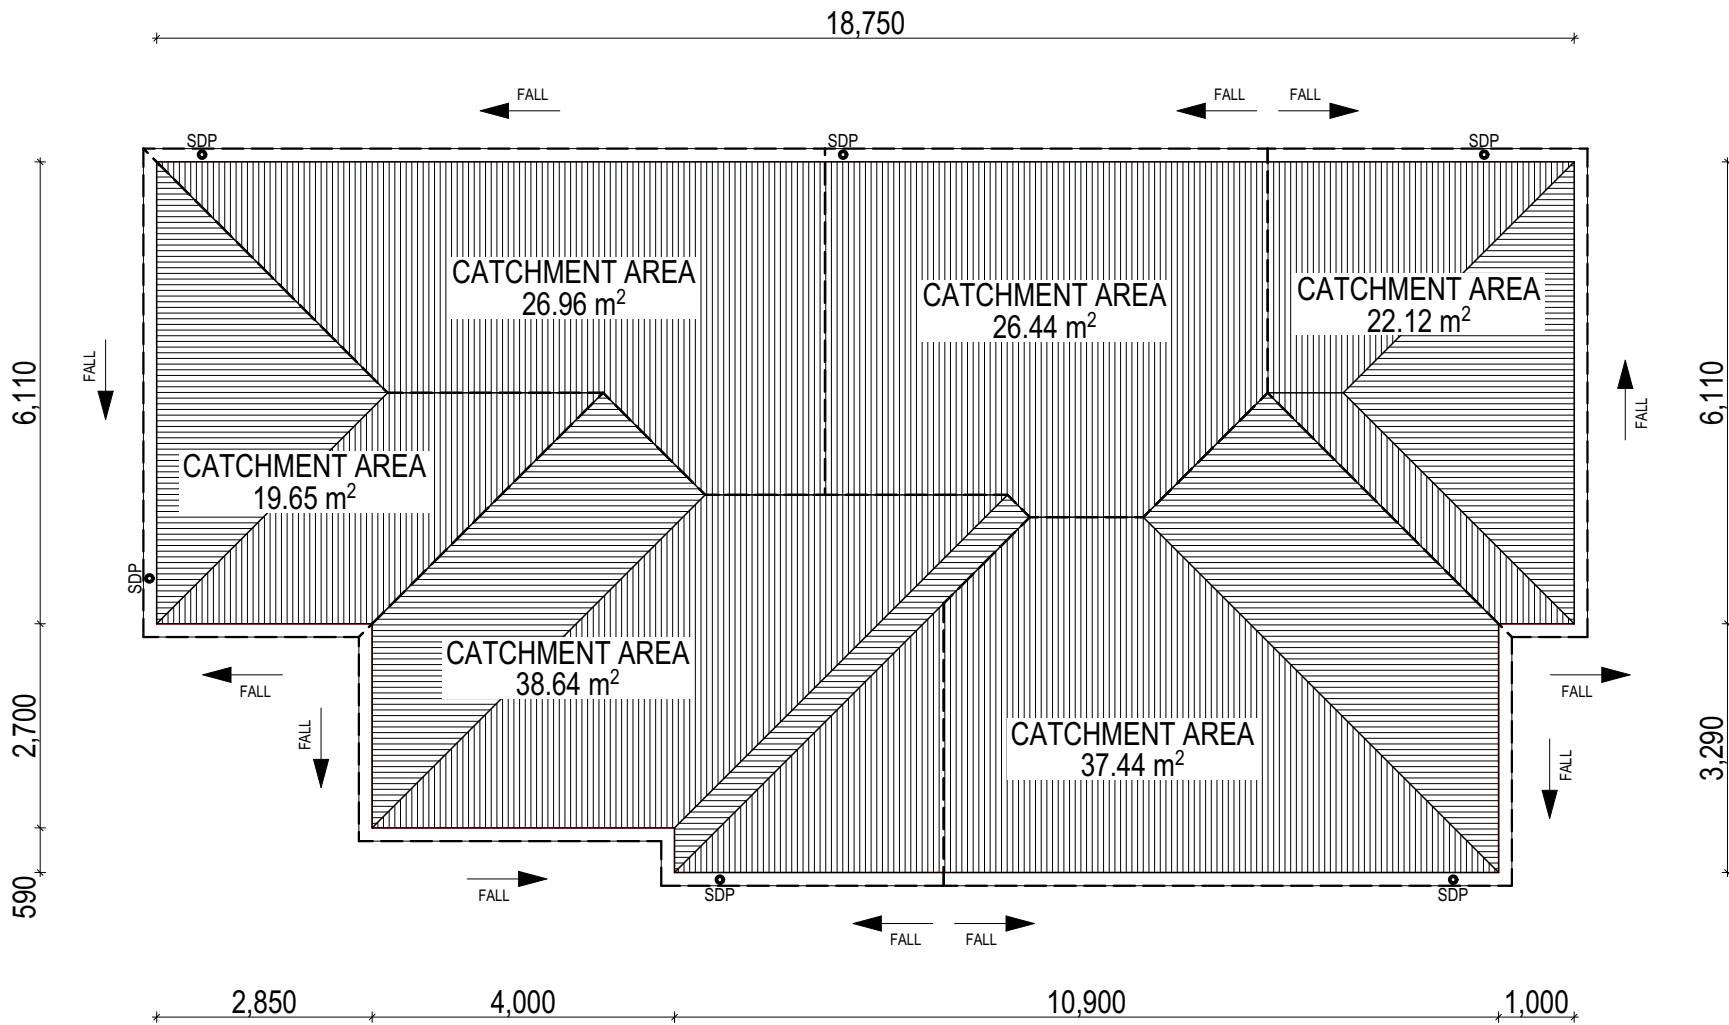


**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: _____ DATE: _____

SIGNATURE: _____ DATE: _____

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

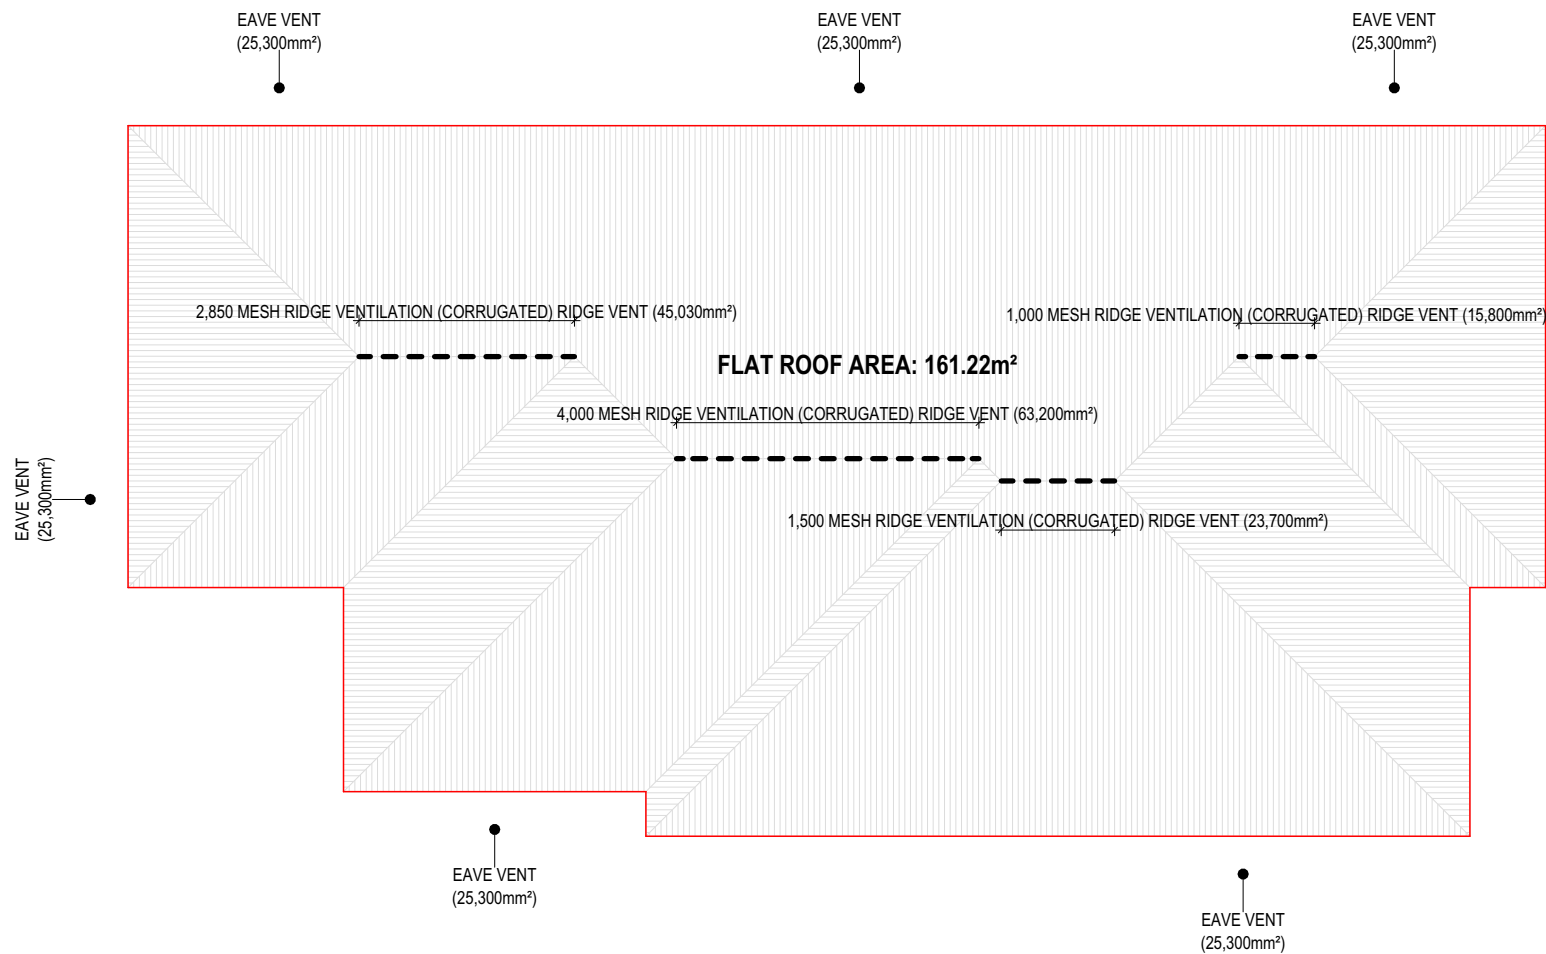

GROUND FLOOR 23° ROOF (ID 1)
ROOF LENGTH: 18.750m
ROOF PITCH: 23.0°
CEILING: FLAT
HIGH LEVEL VENTILATION REQUIRED: 93,745mm²
LOW LEVEL VENTILATION REQUIRED: 131,243mm²

ROOF SPACE VENTILATION			
REFER TO ROOF PLAN FOR VENTILATION LOCATIONS			
GROUND FLOOR 23Â° ROOF			
LONGEST HORIZONTAL ROOF LENGTH		18.750m	
ROOF PITCH		23.00°	
HIGH LEVEL VENTILATION	REQUIRED	93,745mm² (5,000 x 18.750m)	
	PROVIDED	147,730mm²	
LOW LEVEL VENTILATION	REQUIRED	131,243mm² (7,000 x 18.750m)	
	PROVIDED	151,800mm²	
MINIMUM REQUIRED SOFIT (EAVE) VENTS		EAVE VENT PROVIDED - 6	

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER	
SIGNATURE:	DATE:

SIGNATURE:	DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED	

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

NOW by Wilson Homes	SPECIFICATION:	REVISION		DRAWN	CLIENT:	HOUSE DESIGN:		HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
	NOW BY WILSON HOMES	1	SITE PLAN	MFC 02/04/2026	ROBERT DAVIS	AUGUSTA 15		H-WNWAUG10SA	
	COPYRIGHT:	2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	ADDRESS:	FACADE DESIGN:		FACADE CODE:	
	© 2026	3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277	OAKWOOD		F-WNWAUG100KWDA	
		4	PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026	LOT / SECTION / CT:	SHEET TITLE:	SHEET No.:	SCALES:	
		5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026	92 / - / 38605	COUNCIL:	12 / 23	1:100	714740
					WEST TAMAR	ROOF VENTILATION PLAN			

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:

- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

FLOOR TILES SHOWN ON PLAN DO NOT INDICATE THE SIZE OR JOINT LOCATIONS OF THE ACTUAL FLOOR TILES.

TIMBER FLOORING SHOWN ON PLAN DOES NOT INDICATE THE BOARD SIZE OR DIRECTION OF THE ACTUAL FLOORING.

COVERINGS LEGEND

NO COVERING

COVER GRADE CONCRETE


CARPET

LAMINATE

TILE (STANDARD WET AREAS)

TILE (UPGRADED AREAS)

DECKING

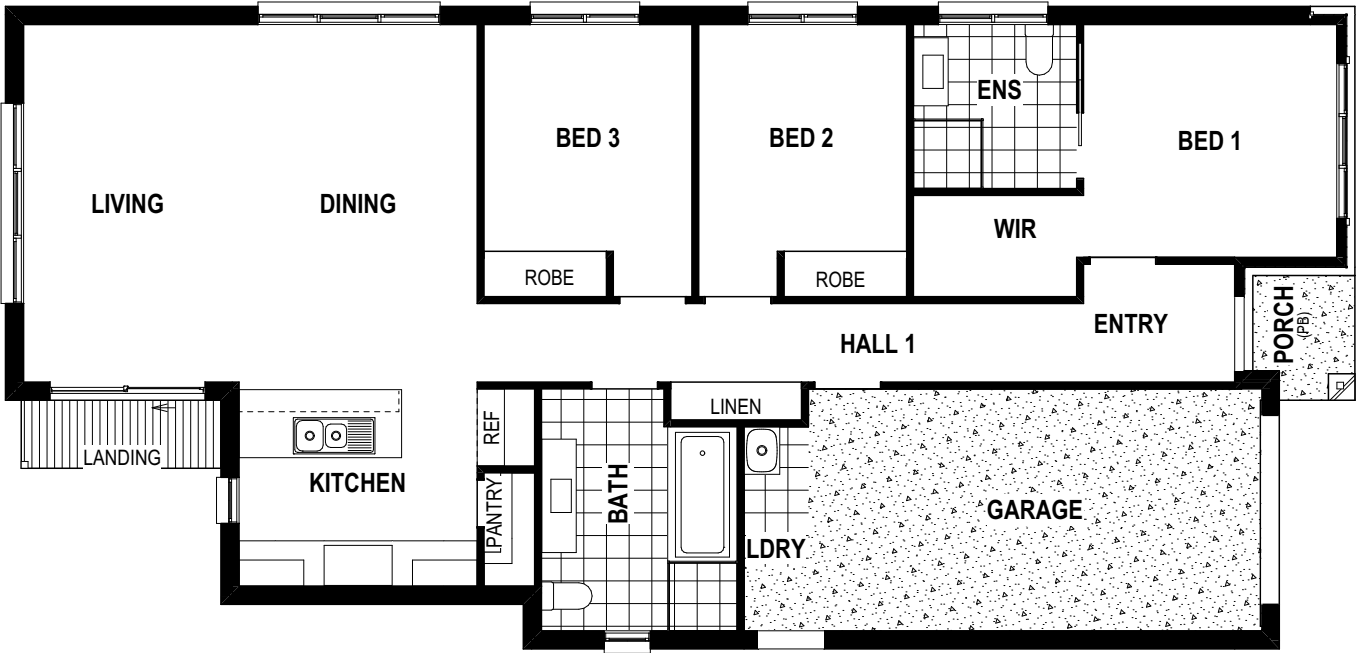

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE:DATE:

SIGNATURE:DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

	SPECIFICATION:		REVISION	DRAWN	CLIENT:			HOUSE DESIGN:			HOUSE CODE:		DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.	
	NOW BY WILSON HOMES	1	SITE PLAN	MFC	02/04/2026	ROBERT DAVIS			AUGUSTA 15			H-WNWAUG10SA		
	COPYRIGHT:	2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	15/05/2026	ADDRESS:			FACADE DESIGN:			FACADE CODE:		
	© 2026	3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277			OAKWOOD					
		4	PRELIM PLANS - INITIAL ISSUE	TDI	12/06/2026	LOT / SECTION / CT:		COUNCIL:	SHEET TITLE:		SHEET No.:	SCALES:		
		5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG	30/07/2026	92 / - / 38605		WEST TAMAR	FLOOR COVERINGS		13 / 23	1:100		714740


Template Version: 24_042

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS


REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:

- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION


DETAILS DEPICTED ON THIS SHEET ARE A REPRESENTATION ONLY. JOINER MAY ADJUST CABINETRY AS REQUIRED.

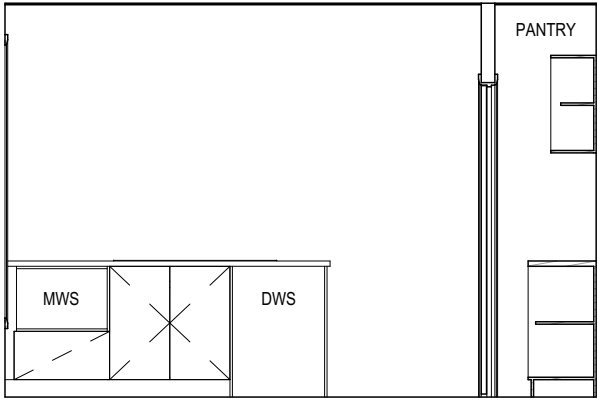


ELEVATION A
SCALE: 1:50

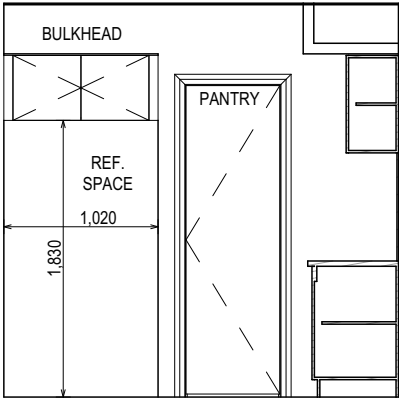


ELEVATION B
SCALE: 1:50

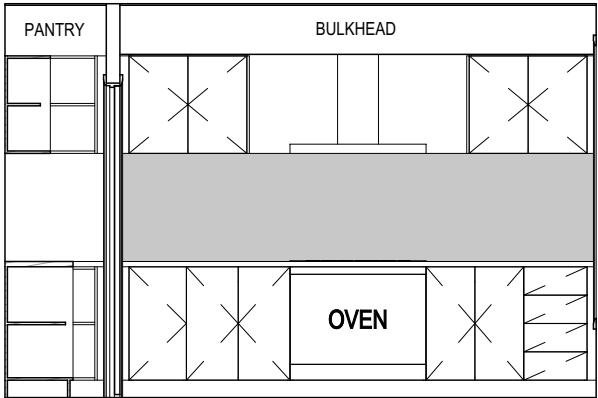



ELEVATION C
SCALE: 1:50

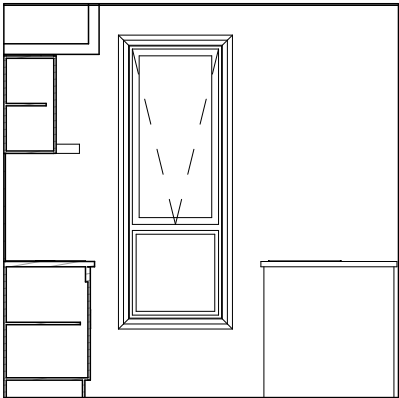

ELEVATION D
SCALE: 1:50

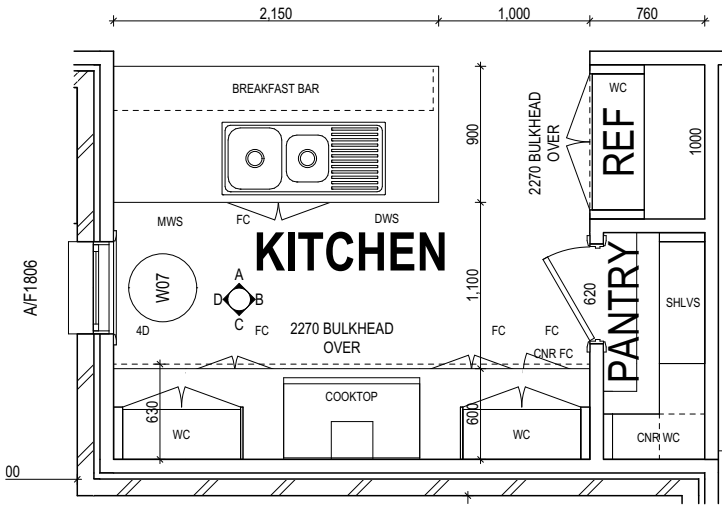

KITCHEN PLAN
SCALE: 1:50

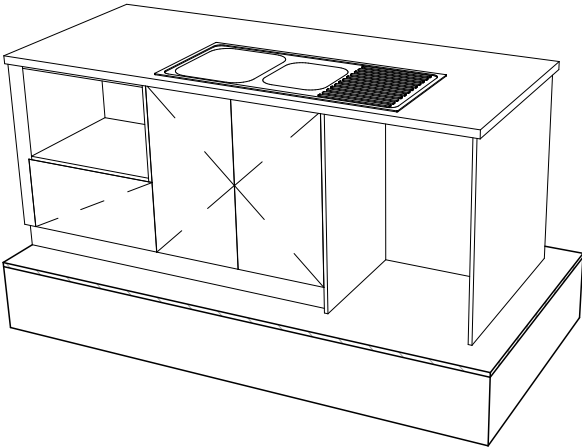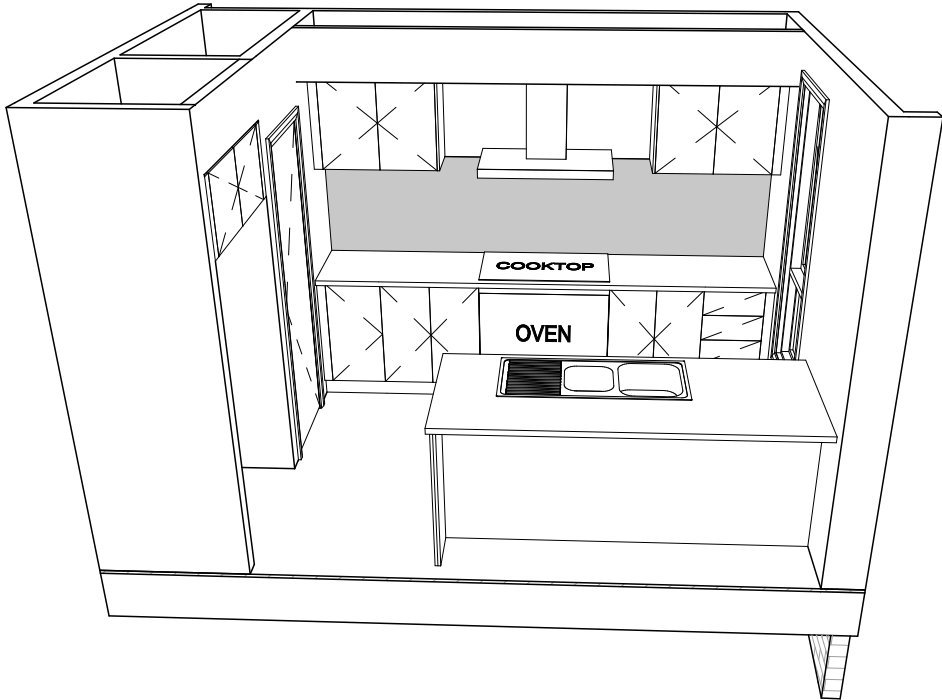

ALL DIMENSIONS ARE FRAME DIMENSIONS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION: NOW BY WILSON HOMES COPYRIGHT: © 2026	REVISION		DRAWN		CLIENT: ROBERT DAVIS ADDRESS: 8 MURRUMBUNG CT, GRINDELWALD TAS 7277 LOT / SECTION / CT: 92 / - / 38605 COUNCIL: WEST TAMAR	HOUSE DESIGN: AUGUSTA 15 FACADE DESIGN: OAKWOOD SHEET TITLE: KITCHEN DETAILS	SHEET No.: 14 / 23	HOUSE CODE: H-WNWAUG10SA FACADE CODE: F-WNWAUG10OKWDA SCALES: 1:50	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE. 714740
	1	SITE PLAN	MFC	02/04/2026					
	2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	15/05/2026					
	3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	28/05/2026					
	4	PRELIM PLANS - INITIAL ISSUE	TDI	12/06/2026					
	5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG	30/07/2026					

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: _____ DATE: _____

SIGNATURE: _____ DATE: _____

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS


REFER TO THE FOLLOWING DETAILS:
VANITY DETAILS G-VANI-001
WINDOW OVER BATH HOB D-WIND-ALU001
STANDARD BATH HOB D-WETA-BATH003
WET AREA TILING LAYOUTS D-WETA-TILE002
SQUARE SET WINDOWS G-WIND-SSET02
FULL HEIGHT TILING D-LINI-WETA

REFER TO SHEET 1 (COVER SHEET) FOR
ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION


DETAILS DEPICTED ON THIS SHEET ARE A
REPRESENTATION ONLY

LEGEND


- RSHR RAIL SHOWER
- ROSE SHOWER ROSE
- ELBW SHOWER ELBOW CONNECTION
- MIX MIXER TAP
- HT HOT TAP
- CT COLD TAP
- HS HOB SPOUT
- WS WALL SPOUT
- SC STOP COCK
- TRH TOILET ROLL HOLDER
- TR-S TOWEL RAIL - SINGLE
- TR-D TOWEL RAIL - DOUBLE
- TL TOWEL LADDER
- TH TOWEL HOLDER
- TR TOWEL RACK
- TMB TUMBLER HOLDER
- RNG TOWEL RING
- RH ROBE HOOK
- SHLF SHELF
- SR SHAMPOO RECESS
- SOAP SOAP HOLDER

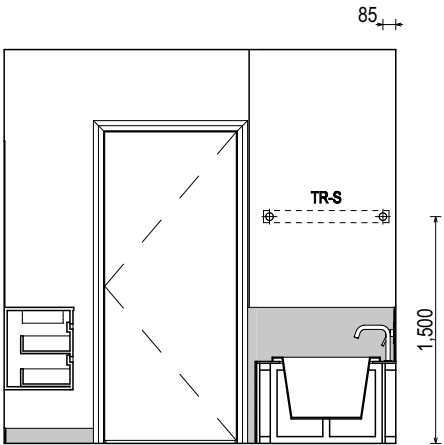


ELEVATION A
SCALE: 1:50

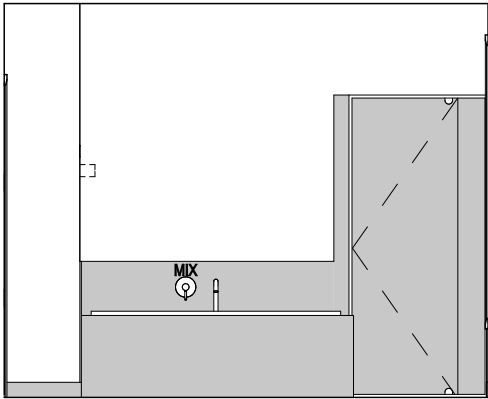


ELEVATION B
SCALE: 1:50

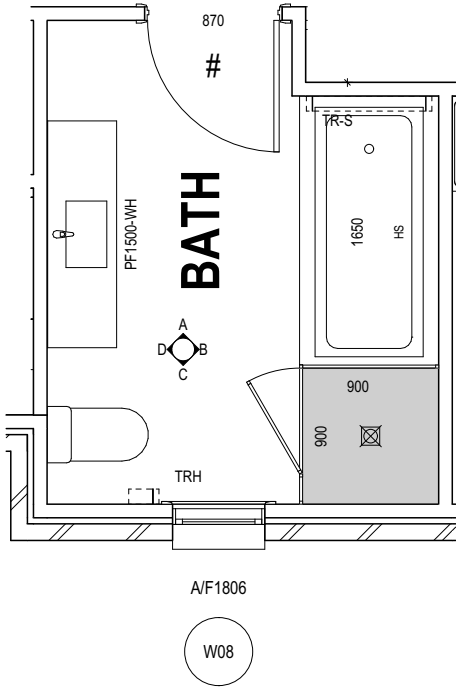

BATHROOM PLAN
SCALE: 1:50

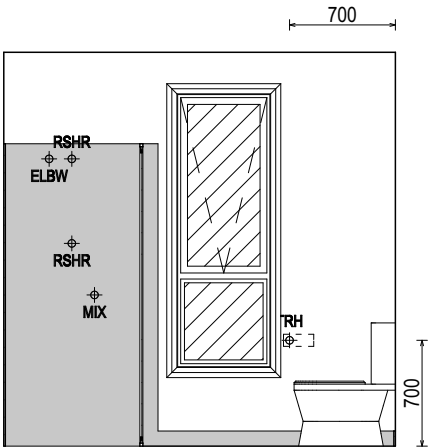

ELEVATION C
SCALE: 1:50

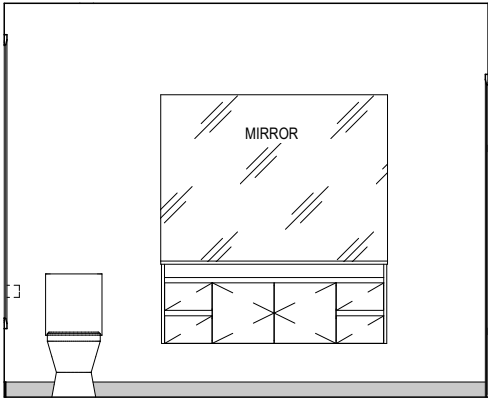

ELEVATION D
SCALE: 1:50

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED


ALL DIMENSIONS ARE FRAME DIMENSIONS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.




SPECIFICATION: NOW BY WILSON HOMES	REVISION	DRAWN	CLIENT:	HOUSE DESIGN:	HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
COPYRIGHT: © 2026	1 SITE PLAN	MFC 02/04/2026	ROBERT DAVIS	AUGUSTA 15	H-WNWAUG10SA	
	2 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	ADDRESS:	FACADE DESIGN:	FACADE CODE:	
	3 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277	OAKWOOD	F-WNWAUG100KWDA	
	4 PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026	LOT / SECTION / CT:	SHEET TITLE:	SHEET No.:	
	5 PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026	92 / - / 38605	WEST TAMAR	15 / 23	SCALES: 1:50
						714740


BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

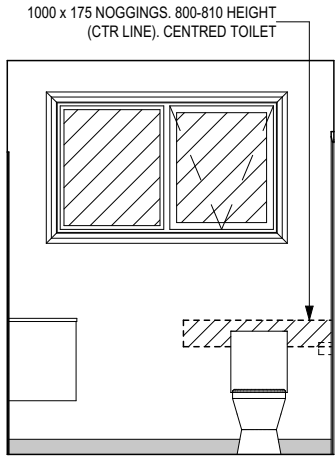


ELEVATION A
SCALE: 1:50

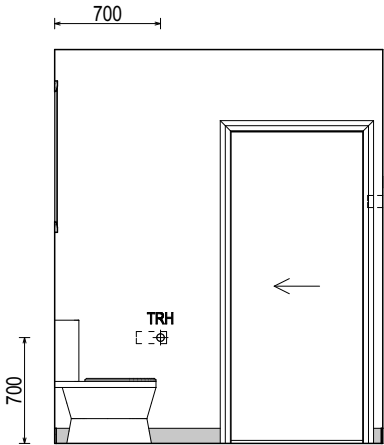


ELEVATION B
SCALE: 1:50

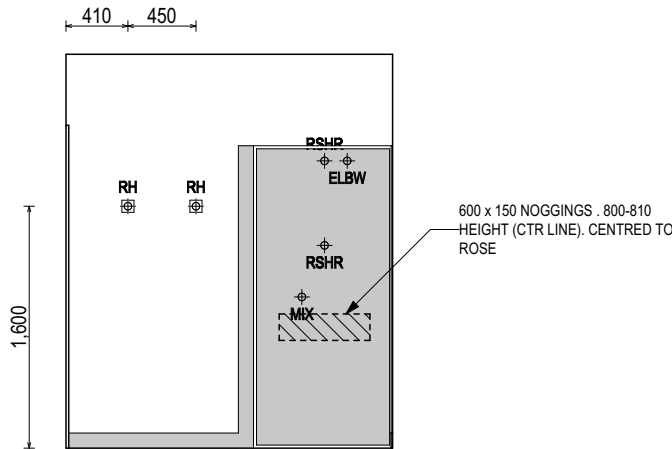

ELEVATION C
SCALE: 1:50

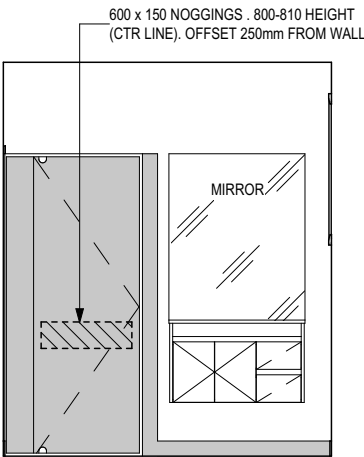

ELEVATION D
SCALE: 1:50

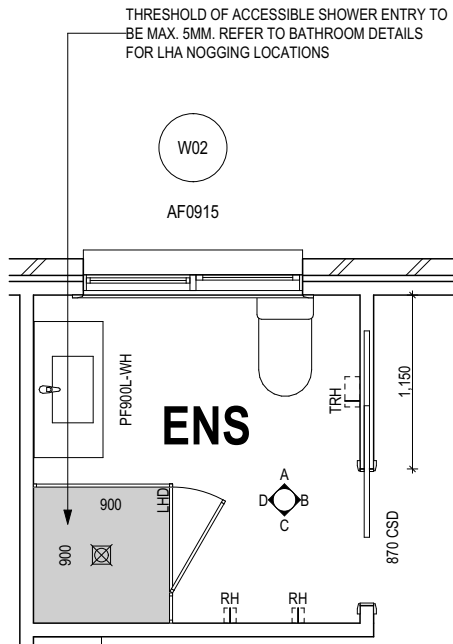

ENSUITE PLAN
SCALE: 1:50

REFER TO THE FOLLOWING DETAILS:
VANITY DETAILS G-VANI-001
WINDOW OVER BATH HOB D-WIND-ALU001
STANDARD BATH HOB D-WETA-BATH003
WET AREA TILING LAYOUTS D-WETA-TILE002
SQUARE SET WINDOWS G-WIND-SSET02
FULL HEIGHT TILING D-LINI-WETA

REFER TO SHEET 1 (COVER SHEET) FOR
ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

DETAILS DEPICTED ON THIS SHEET ARE A
REPRESENTATION ONLY

LEGEND

RSHR	RAIL SHOWER
ROSE	SHOWER ROSE
ELBW	SHOWER ELBOW CONNECTION
MIX	MIXER TAP
HT	HOT TAP
CT	COLD TAP
HS	HOB SPOUT
WS	WALL SPOUT
SC	STOP COCK
TRH	TOILET ROLL HOLDER
TR-S	TOWEL RAIL - SINGLE
TR-D	TOWEL RAIL - DOUBLE
TL	TOWEL LADDER
TH	TOWEL HOLDER
TR	TOWEL RACK
TMB	TUMBLER HOLDER
RNG	TOWEL RING
RH	ROBE HOOK
SHLF	SHELF
SR	SHAMPOO RECESS
SOAP	SOAP HOLDER

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

ALL DIMENSIONS ARE FRAME DIMENSIONS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.




SPECIFICATION: NOW BY WILSON HOMES	REVISION	DRAWN	CLIENT: ROBERT DAVIS	HOUSE DESIGN: AUGUSTA 15	HOUSE CODE: H-WNWAUG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
COPYRIGHT: © 2026	1 SITE PLAN	MFC 02/04/2026	ADDRESS: 8 MURRUMBUNG CT, GRINDELWALD TAS 7277	FACADE DESIGN: OAKWOOD	FACADE CODE: F-WNWAUG100KWDA	
	2 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	LOT / SECTION / CT: 92 / - / 38605	SHEET TITLE: ENSUITE DETAILS	SHEET No.: 16 / 23	
	3 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	COUNCIL: WEST TAMAR		SCALES: 1:50	
	4 PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026				
	5 PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026				714740

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS


REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

DETAILS DEPICTED ON THIS SHEET ARE A REPRESENTATION ONLY


PROVIDE ADDITIONAL NOGGING TO LAUNDRY FOR FIXING OF WALL MOUNTED CLOTHES DRYER AS PER D-FRAM-ELEC006



ELEVATION A
SCALE: 1:50

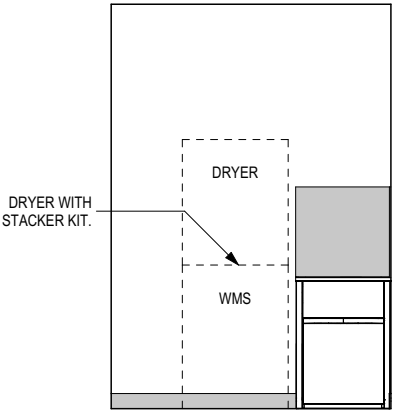

ELEVATION D
SCALE: 1:50

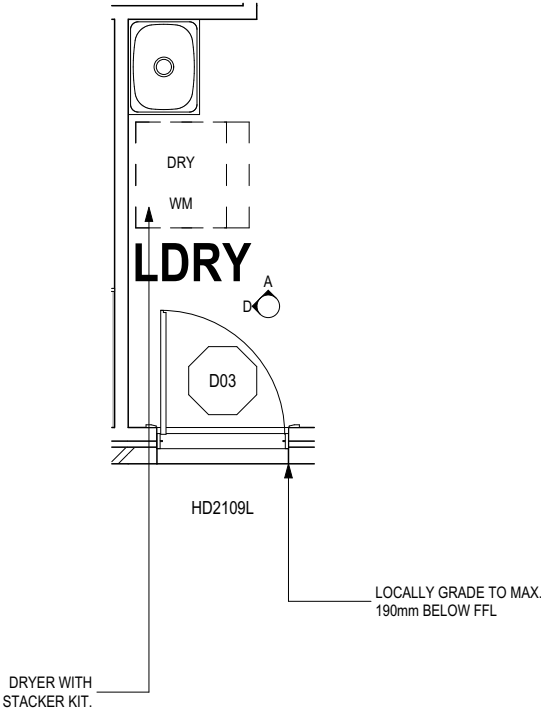

LAUNDRY PLAN
SCALE: 1:50

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:


SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED


ALL DIMENSIONS ARE FRAME DIMENSIONS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.


	SPECIFICATION: NOW BY WILSON HOMES		REVISION	DRAWN	CLIENT:		HOUSE DESIGN:		HOUSE CODE:		DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
		1	SITE PLAN	MFC 02/04/2026	ROBERT DAVIS		AUGUSTA 15		H-WNWAUG10SA		
	COPYRIGHT: © 2026	2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	ADDRESS:		FACADE DESIGN:		FACADE CODE:		
		3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277		OAKWOOD		F-WNWAUG100KWDA		
		4	PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026	LOT / SECTION / CT:	COUNCIL:	SHEET TITLE:	SHEET No.:	SCALES:		
		5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026	92 / - / 38605	WEST TAMAR	LAUNDRY DETAILS	17 / 23	1:50	714740	

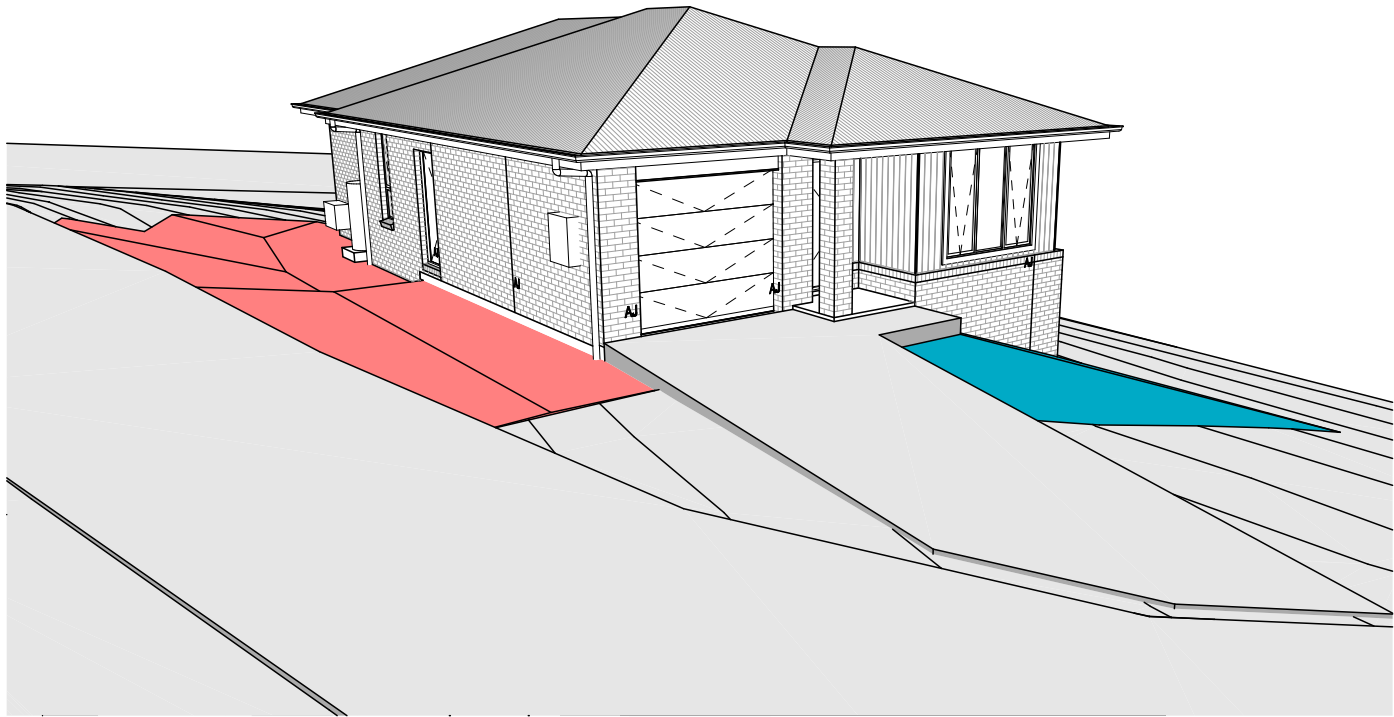


FRONT LEFT

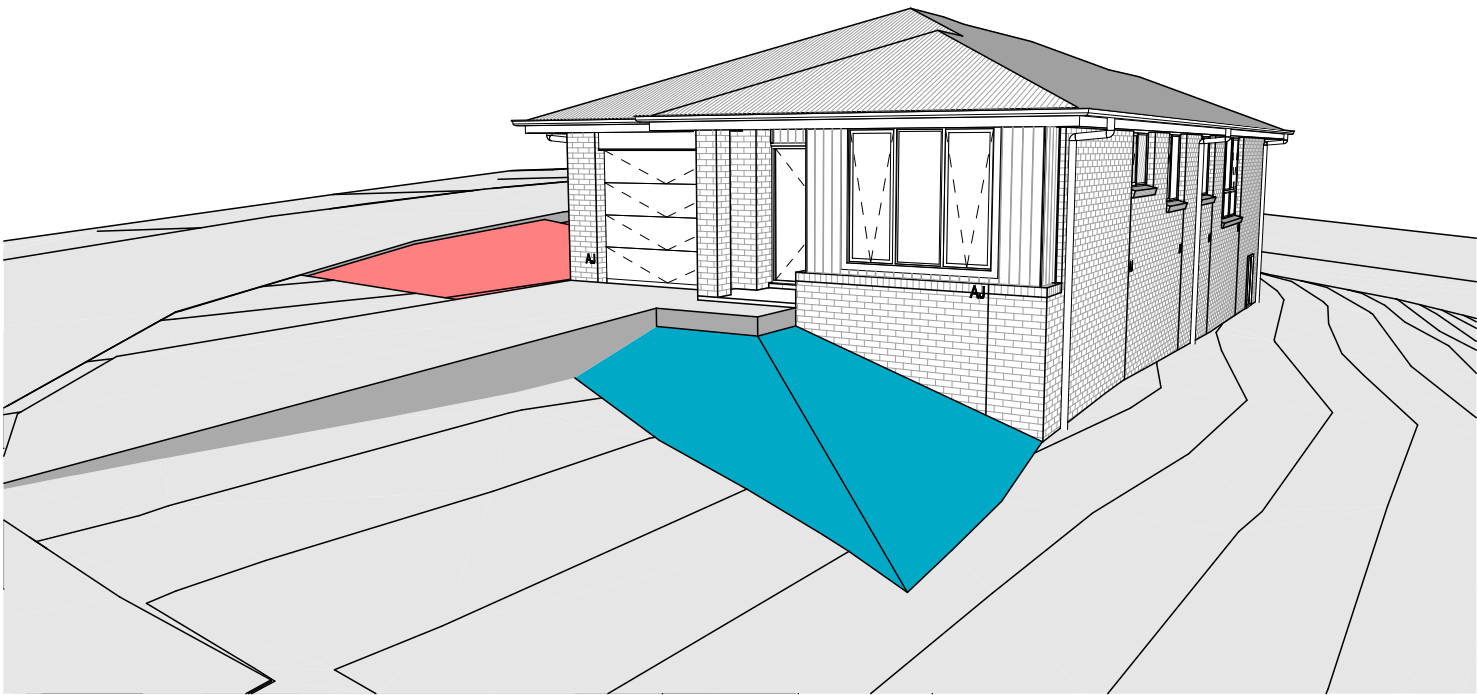

FRONT RIGHT

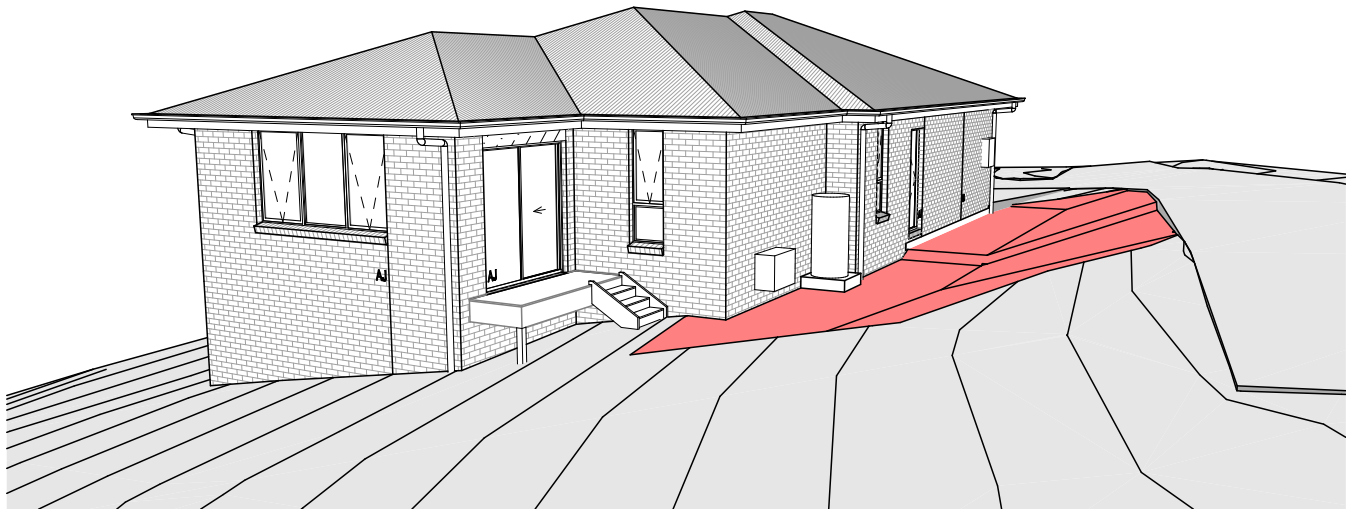

REAR LEFT

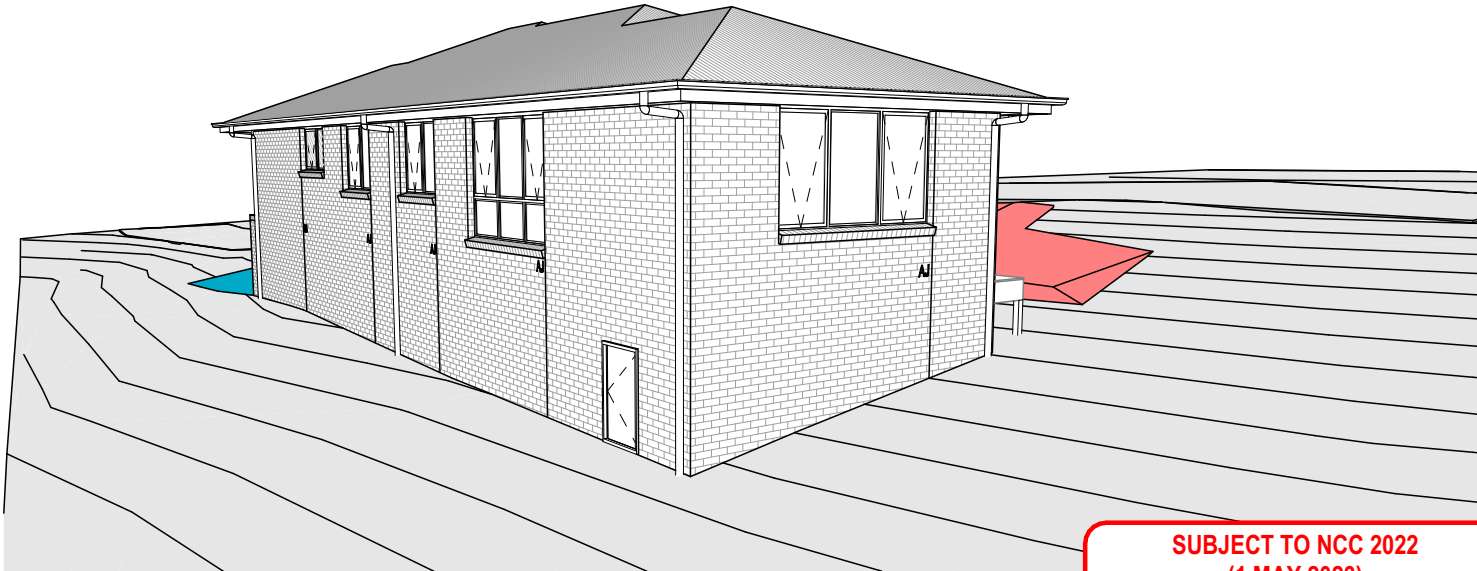

REAR RIGHT

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER	
SIGNATURE:	DATE:

SIGNATURE:	DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED	

NOTE: SITE LEVELS AND SETBACKS SHOWN ARE INDICATIVE ONLY AND SUBJECT TO A FINAL CONTOUR SURVEY AND REGISTERED REPORTS BEING COMPLETED. 3D IMAGES ARE FOR ILLUSTRATIVE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

	SPECIFICATION: NOW BY WILSON HOMES		REVISION		DRAWN		CLIENT: ROBERT DAVIS				HOUSE DESIGN: AUGUSTA 15				HOUSE CODE: H-WNWAUG10SA		DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
	COPYRIGHT: © 2026		1	SITE PLAN	MFC	02/04/2026	ADDRESS: 8 MURRUMBUNG CT, GRINDELWALD TAS 7277				FACADE DESIGN: OAKWOOD				FACADE CODE: F-WNWAUG100KWDA		
			2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	15/05/2026	LOT / SECTION / CT: 92 / - / 38605		COUNCIL: WEST TAMAR		SHEET TITLE: 3D VIEWS		SHEET No.: 18 / 23		SCALES:		
			3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	28/05/2026											
			4	PRELIM PLANS - INITIAL ISSUE	TDI	12/06/2026											
		5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG	30/07/2026											714740	

Template Version: 24.042

WET AREA NOTES

VESSELS OR AREA WHERE THE FIXTURE IS INSTALLED	FLOORS AND HORIZONTAL SURFACES	WALLS	WALL JUNCTIONS AND JOINTS	PENETRATIONS
ENCLOSED SHOWER WITH HOB	WATERPROOF ENTIRE ENCLOSED SHOWER AREA INCLUDING HOB.	WATERPROOF TO NOT LESS THAN 150mm ABOVE THE SHOWER FLOOR SUBSTRATE OR NOT LESS THAN 25mm ABOVE THE MAXIMUM RETAINED WATER LEVEL WHICH EVER IS THE GREATER WITH THE REMAINDER BEING WATERPROOF TO A HEIGHT OF NOT LESS THAN 1800mm ABOVE THE FINISHED FLOOR LEVEL.	WATERPROOF INTERNAL AND EXTERNAL CORNERS AND HORIZONTAL JOINTS WITHIN A HEIGHT OF 1800mm ABOVE THE FLOOR LEVEL WITH NOT LESS THAN 40mm WIDTH EITHER SIDE OF THE JUNCTION.	WATERPROOF ALL PENETRATIONS.
ENCLOSED SHOWER WITHOUT HOB	WATERPROOF ENTIRE ENCLOSED SHOWER AREA, INCLUDING WATERSTOP.	WATERPROOF TO NOT LESS THAN 150mm ABOVE THE SHOWER FLOOR SUBSTRATE WITH THE REMAINDER BEING WATERPROOF TO A HEIGHT OF NOT LESS THAN 1800mm ABOVE THE FINISHED FLOOR LEVEL.	WATERPROOF INTERNAL AND EXTERNAL CORNERS AND HORIZONTAL JOINTS WITHIN A HEIGHT OF 1800mm ABOVE THE FLOOR LEVEL WITH NOT LESS THAN 40mm WIDTH EITHER SIDE OF THE JUNCTION.	WATERPROOF ALL PENETRATIONS.
ENCLOSED SHOWER WITH STEPDOWN	WATERPROOF ENTIRE ENCLOSED SHOWER AREA INCLUDING THE STEPDOWN.	WATERPROOF TO NOT LESS THAN 150mm ABOVE THE SHOWER FLOOR SUBSTRATE OR NOT LESS THAN 25mm ABOVE THE MAXIMUM RETAINED WATER LEVEL WHICHEVER IS THE GREATER WITH THE REMAINDER BEING WATERPROOF TO A HEIGHT OF NOT LESS THAN 1800mm ABOVE THE FINISHED FLOOR LEVEL.	WATERPROOF INTERNAL AND EXTERNAL CORNERS AND HORIZONTAL JOINTS WITHIN A HEIGHT OF 1800mm ABOVE THE FLOOR LEVEL WITH NOT LESS THAN 40mm WIDTH EITHER SIDE OF THE JUNCTION.	WATERPROOF ALL PENETRATIONS.
ENCLOSED SHOWER WITH PRE-FORMED SHOWER BASE	N/A	WATERPROOF TO A HEIGHT OF NOT LESS THAN 1800mm ABOVE FINISHED FLOOR LEVEL.	WATERPROOF INTERNAL AND EXTERNAL CORNERS AND HORIZONTAL JOINTS WITHIN A HEIGHT OF 1800mm ABOVE THE FLOOR LEVEL WITH NOT LESS THAN 40mm WIDTH EITHER SIDE OF THE JUNCTION.	WATERPROOF ALL PENETRATIONS.
UNENCLOSED SHOWERS	WATERPROOF ENTIRE UNCLOSED SHOWER AREA.	WATERPROOF TO NOT LESS THAN 150mm ABOVE THE SHOWER FLOOR SUBSTRATE OR NOT LESS THAN 25mm ABOVE THE MAXIMUM RETAINED WATER LEVEL WHICH EVER IS THE GREATER WITH THE REMAINDER BEING WATERPROOF TO A HEIGHT OF NOT LESS THAN 1800mm ABOVE THE FINISHED FLOOR LEVEL.	WATERPROOF INTERNAL AND EXTERNAL CORNERS AND HORIZONTAL JOINTS WITHIN A HEIGHT OF 1800mm ABOVE THE FLOOR LEVEL WITH NOT LESS THAN 40mm WIDTH EITHER SIDE OF THE JUNCTION.	WATERPROOF ALL PENETRATIONS.
AREAS OUTSIDE THE SHOWER AREA FOR CONCRETE AND COMPRESSED FIBRE CEMENT SHEET FLOORING	WATER RESISTANT TO ENTIRE FLOOR.	N/A	WATERPROOF ALL WALL/FLOOR JUNCTIONS. WHERE A FLASHING IS USED THE HORIZONTAL LEG MUST BE NOT LESS THAN 40mm.	N/A
AREAS OUTSIDE THE SHOWER AREA FOR TIMBER FLOORS INCLUDING PARTICLEBOARD, PLYWOOD AND OTHER TIMBER BASED FLOORING MATERIALS	WATERPROOF ENTIRE FLOOR.	N/A	WATERPROOF ALL WALL/FLOOR JUNCTIONS. WHERE A FLASHING IS USED THE HORIZONTAL LEG MUST BE NOT LESS THAN 40mm.	N/A
AREAS ADJACENT TO BATHS AND SPAS FOR CONCRETE AND COMPRESSED FIBRE CEMENT SHEET FLOORING.	WATER RESISTANT TO ENTIRE FLOOR.	WATERPROOF TO A HEIGHT OF NOT LESS THAN 150mm ABOVE THE VESSEL AND EXPOSED SURFACES BELOW THE VESSEL LIP TO FLOOR LEVEL.	WATERPROOF EDGES OF THE VESSEL AND JUNCTION OF BATH ENCLOSURE WITH FLOOR. WHERE THE LIP OF THE BATH IS SUPPORTED BY A HORIZONTAL SURFACE, THIS MUST BE WATERPROOF FOR SHOWERS OVER BATH AND WATER RESISTANT FOR ALL OTHER CASES.	WATERPROOF ALL TAP AND SPOUT PENETRATIONS WHERE THEY OCCUR IN A HORIZONTAL SURFACE.
AREAS ADJACENT TO BATHS AND SPAS (SEE NOTE 1) FOR TIMBER FLOORS INCLUDING PARTICLEBOARD, PLYWOOD AND OTHER TIMBER BASED FLOORING MATERIALS.	WATERPROOF ENTIRE FLOOR.	WATERPROOF TO A HEIGHT OF NOT LESS THAN 150mm ABOVE THE VESSEL AND EXPOSED SURFACES BELOW THE VESSEL LIP TO FLOOR LEVEL.	WATERPROOF EDGES OF THE VESSEL AND JUNCTION OF BATH ENCLOSURE WITH FLOOR. WHERE THE LIP OF THE BATH IS SUPPORTED BY A HORIZONTAL SURFACE, THIS MUST BE WATERPROOF FOR SHOWERS OVER BATH AND WATER RESISTANT FOR ALL OTHER CASES.	WATERPROOF ALL TAP AND SPOUT PENETRATIONS WHERE THEY OCCUR IN A HORIZONTAL SURFACE.
INSERTED BATHS	N/A FOR FLOOR UNDER BATH. ANY SHELF AREA ADJOINING THE BATH OR SPA MUST BE WATERPROOF AND INCLUDE A WATERSTOP UNDER THE VESSEL LIP.	N/A FOR WALL UNDER BATH. WATERPROOF TO NOT LESS THAN 150mm ABOVE THE LIP OF THE BATH.	N/A FOR WALL UNDER BATH. WATERPRROF TO NOT LESS THAN 150 mm ABOVE THE LIP OF A BATH OR SPA.	WATERPROOF ALL TAP AND SPOUT PENETRATIONS WHERE THEY OCCUR IN A HORIZONTAL SURFACE.
WALLS ADJOINING OTHER VESSELS (EG. SINKS, LAUNDRY TUBS AND BASINS)	N/A	WATERPROOF TO A HEIGHT OF NOT LESS THAN 150mm ABOVE THE VESSEL IF THE VESSEL IS WITHIN 75mm OF THE WALL.	WHERE THE VESSEL IS FIXED TO A WALL, WATERPROOF EDGES FOR EXTENT OF VESSEL.	WATERPROOF ALL TAP AND SPOUT PENETRATIONS WHERE THEY OCCUR IN A HORIZONTAL SURFACE.
LAUNDRIES AND WCS	WATER RESISTANT TO ENTIRE FLOOR.	WATERPROOF ALL WALL/FLOOR JUNCTIONS TO NOT LESS THAN 25mm ABOVE THE FINISHED FLOOR LEVEL, SEALED TO FLOOR.	WATERPROOF ALL WALL/FLOOR JUNCTIONS. WHERE A FLASHING IS USED THE HORIZONTAL LEG MUST BE NOT LESS THAN 40mm.	N/A

THE ABOVE INFORMATION IS FOR GENERAL GUIDANCE AND IS INDICATIVE ONLY. WATERPROOFING INSTALLERS TO COMPLY WITH ALL CURRENT CODES OF LEGISLATION WHICH TAKE PRECEDENCE OVER THIS SPECIFICATION.

WET AREA WAERPROOFING BY LICENSED AND ACCREDITED INSTALLER. CERTIFICATION TO BE PROVIDED TO BUILDING SURVEYOR. CONTRACTOR OR BUILDER TO DETERMINE THE APPROPRIATE WATERPROOFING IN ACCORDANCE WITH AS3740 PART 10.2 OF N.C.C AND TO NOTIFY THE BUILDING SURVEYOR FOR INSPECTION ARRANGEMENTS DURING INSTALLATION.

ENERGY EFFICIENCY - GENERAL

STATED R VALUES ARE FOR ADDITIONAL INSULATION REQUIRED AND ARE NOT RT VALUES (TOTAL SYSTEM VALUE)

INSULATION TO BE INSTALLED TO MANUFACTURERS SPECIFICATIONS AND ANY RELEVANT STANDARDS

BULK INSULATION IS NOT TO BE COMPRESSED AS THIS REDUCES THE EFFECTIVE R RATING

N.C.C 2022 TAS PART H6

IN TASMANIA, FOR NCC PART H6 REFER TO NCC 2019 AMENDMENT 1 PART 2.6; FOR NCC PART 13.1 REFER TO NCC 2019 PART 3.12

N.C.C 2019 3.12.0 (A)

PERFORMANCE REQUIREMENT P2.6.1 FOR THE THERMAL PERFORMANCE OF THE BUILDING IS SATISFIED BY COMPLYING WITH:

3.12.0.1 - FOR REDUCING THE HEATING AND COOLING LOADS
TO REDUCE HEATING AND COOLING LOADS MUST ACHIEVE AN ENERGY RATING USING HOUSING ENERGY RATING SOFTWARE OF NOT LESS THAN 6 STARS.

3.12.1.1 - FOR BUILDING FABRIC THERMAL INSULATION
BUILDER TO ENSURE THAT ALL INSULATION COMPLIES WITH AS/NZS 4859.1 AND BE INSTALLED TO N.C.C 3.12.1.1.

3.12.1.2(e) - FOR COMPENSATING FOR A LOSS OF CEILING INSULATION
REFER TO ATTACHED THERMAL PERFORMANCE CERTIFICATE

(i) IF ALLOWANCE HAS BEEN MADE FOR CEILING PENERATIONS IN NATHERS (FIRST RATE 5) CERTIFICATION PROCESS THEN NO FURTHER ACTION REQUIRED.

(ii) IF NO ALLOWANCE HAS BEEN MADE FOR CEILING PENETRATIONS IN NATHERS (FIRST RATE 5) CERTIFICATION PROCESS THEN CEILING PENETRATION AREA MUST BE CALCULATED AND THE NECESSARY ADJUSTMENT MADE TO THE SPECIFIED INSULATION AS PER TABLE 3.12.1.1B OF NCC

3.12.1.5(c) AND 3.12.1.5(d) - FOR FLOOR EDGE INSULATION
FOR CONCRETE SLAB ON GROUND WITH IN SLAB HEATING OR COOLING.

3.12.3 - FOR BUILDING SEALING
3.12.3.1 - CHIMNEYS AND FLUES
THE CHIMNEY OR FLUE OF AN OPEN SOLID FUEL BURNING APPLIANCE MUST BE PROVIDED WITH A DAMPER OR FLAP THAT CAN BE CLOSED TO SEAL THE CHIMNEY OR FLUE.

3.12.3.2 - ROOF LIGHTS
(a) A ROOF LIGHT MUST BE SEALED, OR CAPABLE OF BEING SEALED WHEN SERVING:
(i) A CONDITIONED SPACE; OR
(ii) A HABITABLE ROOM IN CLIMATE ZONES 4, 5, 6, 7 OR 8
(b) A ROOF LIGHT REQUIRED BY (a) TO BE SEALED, OR CAPABLE OF BEING SEALED MUST BE CONSTRUCTED WITH:
(i) AN IMPERFORATE CEILING DIFFUSER OR THE LIKE INSTALLED AT A CEILING OR INTERNAL LINING LEVEL; OR
(ii) A WATERPROOF SEAL; OR
(iii) A SHUTTER SYSTEM READILY OPERATED MANUALLY, MECHANICALLY OR ELECTRONICALLY BY THE OCCUPANT.

3.12.3.2 - ROOF LIGHTS
(a) A ROOF LIGHT MUST BE SEALED, OR CAPABLE OF BEING SEALED WHEN SERVING:
(i) A CONDITIONED SPACE; OR
(ii) A HABITABLE ROOM IN CLIMATE ZONES 4, 5, 6, 7 OR 8
(b) A ROOF LIGHT REQUIRED BY (a) TO BE SEALED, OR CAPABLE OF BEING SEALED MUST BE CONSTRUCTED WITH:
(i) AN IMPERFORATE CEILING DIFFUSER OR THE LIKE INSTALLED AT A CEILING OR INTERNAL LINING LEVEL; OR
(ii) A WATERPROOF SEAL; OR
(iii) A SHUTTER SYSTEM READILY OPERATED MANUALLY, MECHANICALLY OR ELECTRONICALLY BY THE OCCUPANT.

3.12.3.4 - EXHAUST FANS
AN EXHAUST FAN MUST BE FITTED WITH A SEALING DEVICE SUCH AS A SELF CLOSE DAMPER, FILTER OR THE LIKE WHEN SERVING:
(a) A CONDITIONED SPACE; OR
(b) A HABITABLE ROOM IN THE CLIMATE ZONES 4, 5, 6, 7 OR 8.

3.12.3.5 - CONSTRUCTION OF ROOF, WALLS AND FLOORS
(a) ROOFS, EXTERNAL WALLS, EXTERNAL FLOORS AND AN OPENING SUCH AS A WINDOW FRAME, DOOR FRAME, ROOF LIGHT FRAME OR THE LIKE MUST BE CONSTRUCTED TO MINIMISE AIR LEAKAGE IN ACCORDANCE WITH (b) WHEN FORMING PART OF THE EXTERNAL FABRIC OF:
(i) A CONDITIONED SPACE; OR
(ii) A HABITABLE ROOM IN CLIMATE ZONE 4, 5, 6, 7 OR 8.
(b) CONSTRUCTION REQUIRED BY (a) MUST BE:
(i) ENCLOSED BY AN INTERNAL LINING SYSTEM THAT ARE CLOSE FITTING AT CEILING, WALL AND FLOOR JUNCTIONS; OR
(ii) SEALED BY CAULKING, SKIRTING, ARCHITRAVES, CORNICES OR THE LIKE.

3.12.3.6 - EVAPORATIVE COOLERS
AN EVAPORATIVE COOLER MUST BE FITTED WITH A SELF CLOSING DAMPER OR THE LIKE WHEN SERVING:
(a) A HEATED SPACE; OR
(b) A HABITABLE ROOM IN CLIMATE ZONES 4, 5, 6, 7 OR 8.

3.12.5.5 - ARTIFICIAL LIGHTING
(a) LAMP POWER DENSITY OR ILLUMINATION POWER DENSITY OF AN ARTIFICIAL LIGHT, EXCLUDING HEATING THAT EMITS LIGHT, MUST NOT EXCEED THE ALLOWANCE OF:
(i) 5W/m² IN A CLASS 1 BUILDING
(ii) 4W/m² ON A VERANDAH, BALCONY OR THE LIKE ATTACHED TO A CLASS 1 BUILDING (NOT EXCLUDING EAVE PERIMETER LIGHTS);
(iii) 3W/m² IN A CLASS 10A BUILDING ASSOCIATED WITH A CLASS 1 BUILDING.
(b) THE ILLUMINATION POWER DENSITY ALLOWANCE IN (a) MAY BE INCREASED BY DIVIDING IT BY THE ILLUMINATION POWER DENSITY ADJUSTMENT FACTOR FOR A CONTROL DEVICE TO SERVICE THE SPACE.

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE:DATE:

SIGNATURE:DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

NOW

byWilson Homes

SPECIFICATION:	REVISION	DRAWN	CLIENT:	HOUSE DESIGN:	HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
NOW BY WILSON HOMES	1 SITE PLAN	MFC 02/04/2026	ROBERT DAVIS	AUGUSTA 15	H-WNWAUG10SA	
COPYRIGHT:	2 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	ADDRESS:	FACADE DESIGN:	FACADE CODE:	
© 2026	3 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277	OAKWOOD	F-WNWAUG100KWDA	
	4 PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026	LOT / SECTION / CT:	SHEET TITLE:	SHEET No.:	
	5 PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026	92 / - / 38605	WEST TAMAR	WET AREA & ENERGY EFFICIENCY NOTES20 / 23	SCALES:

714740

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

File Location: D:\Tuyen nguyen\Tuyen\JOB\$714740 - Davis\ITek Issues\714740 - Davis - AC24 - Rev.04 - Prelim - 2026.06.12.pn

Template Version: 24.042

Requirements for Building In Bushfire Hazard Areas
Building Act 2016
Directors Determination - Bushfire Hazard Areas
V1.1, dated 08 April 2021

Deemed-to-Satisfy Requirements (Part 2.3)

2.3.1 Design and construction
(1) Building work in a bushfire-prone area must be designed and constructed in accordance with either: -
(a) AS 3959-2018; or
(b) Standard for Steel Framed Construction in Bushfire Areas published by the National Association of Steel Framed Housing Inc. (NASH), as appropriate for a BAL determined for that site using table 2.6 of AS 3959.
(2) Subclause (1)(a) is only applicable to the following:
(a) a Class 1, 2 or 3 building; or
(b) a Class 10a building or deck associated with a Class 1, 2 or 3 building.
(3) Subclause (1)(b) is only applicable to the following:
(a) a Class 1 building; or
(b) a Class 10a building or deck associated with a Class 1 building.
(4) Despite subsection (1) permissible, variations from requirements specified in 1(a) and 1(b) are as specified in Table 1.
(5) Despite subsections (1) and (4), performance requirements for buildings subject to BAL 40 or BAL Flame Zone (BAL-FZ) are not satisfied by compliance with subsections (1) or (4).

2.3.2 Property Access
(1) A new building in a bushfire-prone area must be provided with property access to the building area and the firefighting water point, accessible by a carriageway, designed and constructed as specified in subclause (4).
(2) For an addition or alteration to an existing building in a bushfire-prone area, if there is no property access available property access must be provided to the building area and the firefighting water point accessible by a carriageway as specified in subclause (4).
(3) An addition or alteration to an existing building in a bushfire-prone area must not restrict any existing property access to the building area or to water supply for firefighting.
(4) Vehicular access from a public road to a building must:
(a) comply with the property access requirements specified in Table 2;
(b) include access from a public road to within 90 metres of the furthest part of the building measured as a hose lay; and
(c) include access to the hardstand area for the firefighting water point.

2.3.3 Water Supply for Fire fighting
(1) A new building constructed in a bushfire-prone area, must be provided with a water supply dedicated for fire fighting purposes as specified in Table 3A or Table 3B.
(2) For an addition or alteration to an existing building in a bushfire-prone area, if there is no water supply for firefighting available the building must be provided with a water supply dedicated for firefighting purposes which complies with the requirements specified in Table 3A or Table 3B.

2.3.4 Hazard Management Areas
(1) A new building, and an existing building in the case of an addition or alteration to a building, in a bushfire-prone area must be provided with a hazard management area.
(2) The hazard management area must comply with the requirements specified in Table 4.
(3) The hazard management area for a particular BAL must have the minimum dimensions required for the separation distances specified for that BAL in Table 2.6 of AS 3959.
(4) The hazard management area must be established and maintained such that the fuels are reduced sufficiently, and other hazards are removed such that the fuels and other hazards do not significantly contribute to the bushfire attack.
2.3.5 Bushfire emergency plan
(1) An emergency plan must be provided for:
(a) a new building;
(b) an existing building in the case of an addition or alteration to a building;
(c) an existing building in the case of a change of building class;
(d) a building associated with the use, handling, generation or storage of a hazardous chemical or explosive; in a bushfire-prone area.
(2) A bushfire emergency plan must comply with the requirements specified in Table 5.

7. Interpretation of Tables
(1) For the purposes of the deemed-to-satisfy provisions in clause 2.3 of this Determination, Tables 1, 2, 3A, 3B, 4, and 5 must be complied with in the following way:
(a) for a particular element specified in column 1, the corresponding requirement specified in column 2 must be complied with.

Table 1 - Construction Requirements & Construction Variations

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Straw Bale Construction	May be used in exposures up to and including BAL 19.
B.	Shielding provisions under Section 3.5 of AS3959-2018	To reduce construction requirements due to shielding, building plans must include suitable detailed elevations or plans that demonstrate that the requirements of Section 3.5 of the Standard can be met.
		Comment: Application of Section 3.5 of the Standard cannot result in and assessment of BAL-LOW.

Table 2 - Requirements for Property Access

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Property access length is less than 30 metres; or access is not for a fire appliance to access a water connection point.	There are no specified design and construction requirements.
B.	Property access length is 30 metres or greater; or access for a fire appliance to a water connection point.	The following design and construction requirements apply to property access: (1) All-weather construction; (2) Load capacity of at least 20 tonnes, including for bridges and culverts; (3) Minimum carriageway widths of 4 metres; (4) Minimum vertical clearance of 4 metres; (5) Minimum horizontal clearance of 0.5 metres from the edge of the carriageway; (6) Cross falls of less than 3° (1:20 or 5%); (7) Dips less than 7° (1:8 or 12.5%) entry and exit angle; (8) Curves with a minimum inner radius of 10 metres; (9) Maximum gradient of 15° (1:3.5 or 28%) for sealed roads, and 10° (1:5.5 or 18%) for unsealed roads; and (10) Terminate with a turning area for fire appliances provided by one of the following: (a) A turning circle with a minimum inner radius of 10 metres; (b) A property access encircling the building; or (c) A hammerhead "T" or "Y" turning head 4 metres wide and 8 metres long.
C.	Property access length is 200 metres or greater.	The following design and construction requirements apply to property access: (1) The Requirements for B above; and (2) Passing bays of 2 metres additional carriageway width and 20 metres length provided every 200 metres.
D.	Property access length is greater than 30 metres, and access is provided to 3 or more properties.	The following design and construction requirements apply to property access: (1) Complies with Requirements for B above; and (2) Passing bays of 2 metres additional carriageway width and 20 metres length must be provided every 100 metres.

Table 3A - Reticulated Water Supply for Firefighting

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Distance between building area to be protected and water supply	The following requirements apply: (1) The building area to be protected must be located within 120 metres of a fire hydrant; and (2) The distance must be measured as a hose lay, between the water connection point and the furthest part of the building area.
B.	Design criteria for fire hydrants	The following requirements apply: (1) Fire hydrant system must be designed and constructed in accordance with TasWater Supplement to Water Supply Code of Australia WSA 03 - 2011-3.1 MRWA Edition 2.0; and (2) Fire hydrants are not installed in parking areas.
C.	Hardstand	A hardstand area for fire appliances must be provided: (1) no more than three metres from the hydrant, measured as a hose lay; (2) No closer than six metres from the building area to be protected; (3) With a minimum width of three metres constructed to the same standard as the carriageway; and (4) Connected to the property access by a carriageway equivalent to the standard of the property access

Table 3B - Static Water Supply for Firefighting

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Distance between building area to be protected and water supply	The following requirements apply: (a) The building area to be protected must be located within 90 metres of the water connection point of a static water supply; and (b) The distance must be measured as a hose lay, between the water connection point and the furthest part of the building area.
B.	Static Water Supplies	A static water supply: (a) May have a remotely located offtake connected to the static water supply; (b) May be a supply for combined use (fire fighting and other uses) but the specified minimum quantity of fire fighting water must be available at all times; (c) Must be a minimum of 10,000 litres per building area to be protected. This volume of water must not be used for any other purpose including fire fighting sprinkler or spray systems; (d) Must be metal, concrete or lagged by non-combustible materials if above ground; and (e) If a tank can be located so it is shielded in all directions in compliance with Section 3.5 of AS 3959-2018, the tank may be constructed of any material provided that the lowest 400 mm of the tank exterior is protected by: (i) metal; (ii) non-combustible material; or (iii) fibre-cement a minimum of 6 mm thickness.
C.	Fittings, pipework and accessories (including stands and tank supports)	Fittings and pipework associated with a water connection point for a static water supply must: (a) Have a minimum nominal internal diameter of 50mm; (b) Be fitted with a valve with a minimum nominal internal diameter of 50mm; (c) Be metal or lagged by non-combustible materials if above ground; (d) Where buried, have a minimum depth of 300mm (e) Provide a DIN or NEN standard forged Storz 65 mm coupling fitted with a suction washer for connection to fire fighting equipment; (f) Ensure the coupling is accessible and available for connection at all times; (g) Ensure the coupling is fitted with a blank cap and securing chain (minimum 220 mm length); (h) Ensure underground tanks have either an opening at the top of not less than 250 mm diameter or a coupling compliant with this Table; and (i) Where a remote offtake is installed, ensure the offtake is in a position that is: (i) Visible; (ii) Accessible to allow connection by fire fighting equipment; (iii) At a working height of 450 - 600mm above ground level; and (iv) Protected from possible damage, including damage by vehicles.
D.	Signage for static water connections	(1) The water connection point for a static water supply must be identified by a sign permanently fixed to the exterior of the assembly in a visible location. The sign must: (a) comply with water tank signage requirements within AS 2304; or (b) comply with the TFS Water Supply Signage Guideline.
E.	Hardstand	A hardstand area for fire appliances must be provided: (a) No more than three metres from the water connection point, measured as a hose lay (including the minimum water level in dams, swimming pools and the like); (b) No closer than six metres from the building area to be protected; (c) With a minimum width of three metres constructed to the same standard as the carriageway; and (d) Connected to the property access by a carriageway equivalent to the standard of the property access.

Table 4 - Requirements for Hazard Management Area

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Hazard managements areas for new buildings on lots provided with a BAL at the time of subdivision.	A new building must: (a) Be located on the lot so as to be provided with a HMA no smaller than the required separation distances for the BAL determined at the time of the subdivision; and (b) Have a HMA established in accordance with a certified bushfire hazard management plan.
B.	Hazard management areas for new buildings on lots not provided with a BAL at the time of sub division.	A new building must: (a) Be located on the lot so as to be provided with a HMA no smaller than the separation distances required for BAL 29; and (b) Have an HMA established in accordance with a certified bushfire hazard management plan.
C.	Hazard management areas for alterations or additions to buildings.	An alteration or addition to a building must: (a) Be located on the lot so as to be provided with a HMA which: (i) Has the separation distances required for the BAL assessed for the construction of the existing building; or (ii) In the case of a building without an existing BAL assessment, is no smaller than the separation distances required for BAL 29; and (b) Have an HMA established in accordance with a certified bushfire hazard management plan.
D.	Hazard management areas for new buildings and additions and alterations to buildings classified as an accommodation building BCA Class 1b, BCA Class 2, or BCA Class 3, other than communal residence for persons with a disability, a respite centre or a residential aged care facility or similar.	A new building or an alteration or addition must: (a) be located on the lot so as to be provided with HMAs no smaller than the separation distances required for BAL 12.5; and (b) have a HMA established in accordance with a certified bushfire hazard management plan.
E.	Hazard management areas for new buildings and additions and alterations to existing buildings classified as vulnerable use as defined in the relevant planning scheme.	A new building or an addition or alteration including change of use must: (a) be located on the lot so as to be provided with HMAs no smaller than the separation distances required for BAL 12.5; and (b) have a HMA established in accordance with a certified bushfire hazard management plan.
F.	Hazard management areas for new buildings or additions and alterations to buildings associated with the use, handling, generation or storage of a hazardous chemical or explosive.	A new building or an alteration or addition, including change of use, for a building determined as a hazardous use must: (a) Be located on the lot so as to be provided with a HMA no smaller than the required separation distances for the BAL determined in the certified bushfire hazard management plan; and (b) Have a HMA established in accordance with a certified bushfire hazard management plan.

Table 5 - Requirements for Emergency Planning

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Bushfire emergency plans	An emergency plan must be developed for the site which is: (a) Consistent with TFS Bushfire Emergency Planning Guidelines; and (b) Approved by TFS or a person accredited by the TFS.

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION:		REVISION		DRAWN		CLIENT:		HOUSE DESIGN:		HOUSE CODE:		DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
NOW BY WILSON HOMES		1	SITE PLAN	MFC	02/04/2026	ROBERT DAVIS		AUGUSTA 15		H-WNWAUG10SA		
COPYRIGHT:		2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	15/05/2026	ADDRESS:		FACADE DESIGN:		FACADE CODE:		
© 2026		3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC	28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277		OAKWOOD		F-WNWAUG10OKWDA		
		4	PRELIM PLANS - INITIAL ISSUE	TDI	12/06/2026	LOT / SECTION / CT:		SHEET TITLE:		SHEET No.:	SCALES:	
		5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG	30/07/2026	92 / - / 38605		BUILDING ACT BUSHFIRE HAZARD AREAS		21 / 23		

714740

AS3959 (2018)

All specifications are per AS3959 (2018) and Wilson Homes request. Other materials and options may be available, refer to AS3959 for full list of compliant materials.

5.1 GENERAL

A building assessed in Section 2 as being BAL -12.5 shall comply with Section 3 and Clauses 5.2 to 5.8.

Any element of construction or system that satisfies the test criteria of AS 1530.8.1 may be used in lieu of the applicable requirements contained in Clauses 5.2 to 5.8 (see Clause 3.8).

NOTE: BAL -12.5 is primarily concerned with protection from ember attack, and radiant heat up to and including 29kW/m² where the site is less than 100 m from the source of the bushfire attack.

5.2 SUBFLOOR SUPPORTS

This Standard does not provide construction requirements for subfloor supports where the subfloor space is enclosed with -
(a) a wall that complies with Clause 5.4; OR
(b) a mesh or perforated sheet with a maximum aperture of 2mm, made of corrosion resistant steel, bronze or aluminium; OR
(c) a combination of Items (a) and (b).

NOTE: This requirement applies to the subject building only and not to verandas, decks, steps, ramps and landings (see Clause 5.7)

C5.2 Combustible materials stored in the subfloor space may be ignited by embers and cause and impact to the building.

5.3 FLOORS

5.3.1 GENERAL

This Standard does not provide construction requirements for concrete slabs on the ground.

5.3.2 ELEVATED FLOORS

5.3.2.1 ENCLOSED SUBFLOOR SPACE

This standard does not provide consturction requirements for elevated floors, including bearers and joists and flooring, where the subfloor space is enclosed with

- (a) a wall that complies with Clause 5.4; OR
- (b) a mesh perforated sheet with a maximum aperture of 2mm, made of corrosion resistant steel, bronze or aluminium; OR
- (c) a combination of Items (a) and (b) above.

5.3.2.2 UNENCLOSED SUBFLOOR SPACE

Where the subfloor space is unenclosed, the bearers, joists and flooring, less than 400mm above finished ground level, shall be one of the following -

- (a) Materials that comply with the following:
 - (i) Bearers and joists shall be -
 - (A) non-combustible; OR
 - (B) bushfire-resisting timber (see Appendix F); OR
 - (C) a combination of Items (A) and (B) above.
 - (ii) Flooring shall be -
 - (A) non-combustible; OR
 - (B) bushfire-resisting timber (see Appendix F); OR
 - (C) timber (other than bushfire-resisting timber), particleboard or plywood flooring where the underside is lined with sarking-type material or mineral wool insulation; OR
 - (D) a combination of any Items (A), (B) or (C) above.
- OR
- (b) A system complying with AS1530.8.1

This standard does not provide construction requirements for elements of elevated floors, including bearers, joists and flooring, if the underside of the element is 400mm or more above finished ground level.

5.4.1 WALLS

The exposed components of an external wall that is less than 400 mm from the ground or less than 400 mm above decks, carport roofs, awnings and similar fittings having an angle of less than 18 degrees to the horizontal and extending more than 110 mm in width from the wall (see Figure D3, Appendix D) shall be:

- (a) Non-combustible material.
NOTE: Examples include, but are not limited to, the following (with a minimum of 90 mm inthickness):
 - (i) Full masonry or masonry veneer walls with an outer leaf of clay, concrete, calcium silicate or natural stone.
 - (ii) Precast or in situ walls of concrete or aerated concrete.
 - (iii) Earth wall including mud brick. OR
- (b) Timber logs of a species with a density of 680kg/m³ or greater at a 12 percent moisture content; of a minimum nominal overall thickness of 90mm and a minimum thickness of 70mm (see Clause 3.11); and gauge planed. OR
- (c) Cladding that is fixed externally to a timber-framed or a steel-framed wall that is sarked on the outside of the frame and is -
 - (i) non-combustible material; OR
 - (ii) fibre cement a minimum of 6mm in thickness; OR
 - (iii) bushfire-resisting timber (see Appendix F); OR
 - (iv) a timber species as specified in Paragraph E1, Appendix E; pr
 - (v) a combination of any of Items (i), (ii), (iii) or (iv) above. OR
- (d) A combination of any items (a), (b) or (c) above.

5.4.2 JOINTS

All joints in the external surface material of walls shall be covered, sealed, overlapped, backed or butt-jointed.

5.4.3 VENTS AND WEEPHOLES

Except for exclusions provided in Clause 3.6, vents and weepholes in external walls shall be screened with a mesh made of corrosion-resistant steel, bronze or aluminium.

5.5.1 BUSHFIRE SHUTTERS

Where fitted, bushfire shutters shall comply with Clause 3.7 and be made from -
(a) non-combustible material; OR
(b) a timber species as specified in Paragraph E1, Appendix E; OR
(c) bushfire-resisting timber (see Appendix F); OR
(d) a combination of Items (a), (b) and (c) above.

5.5.2 SCREENS FOR WINDOWS AND DOORS

Where fitted, screens for windows and doors shall have a mesh or perforated sheet made of corrosion-resistant steel, bronze or aluminium.

The frame supporting the mesh or perforated sheet shall be made from -
(a) metal; OR
(b) bushfire-resisting timber (see Appendix F);
(c) a timber species as specified in Paragraph E2, Appendix E.

5.5.3 WINDOWS AND SIDELIGHTS

Window assemblies shall:

- (a) be completely protected by a bushfire shutter that complies with Clause 3.7 and clause 5.5.1; OR
- (b) Be completely protected externally by screens that conform with Clause 3.6 and Clause 5.5.2
- (c) Conform with the following:
 - (i) Frame material For window assemblies less than 400mm from the ground or less than 400mm above decks, carport roofs, awnings and similar elements or fittings having and angle less than 18 degrees to the horizontal and extending more than 110mm in width from the window frame (see Figure D3, Appendix D), window frames and window joinery shall be made from:
 - (A) Bushfire-resisting timber (see Appendix F) OR
 - (B) A timber species as specified in Paragraph E2, Appendix F); OR
 - (C) Metal. OR
 - (D) Metal-reinforced uPVC. The reinforcing members shall be made from aluminium, stainless steel, or corrosion-resistant steel.
 - There are no specific restrictions on frame material for all other windows.
 - (ii) Hardware There are no specific restrictions on hardware for windows.
 - (iii) Glazing Where glazing is less than 400mm from the ground or less than 400mm above decks, carport roofs, awnings and similar elements or fittings having and angle less than 18 degrees to the horizontal and extending more than 110mm in width from the window frame (see Figure D3, Appendix D), this glazing shall be Grade A safety glass a minimum of 4mm in thickness or glass blocks with no restriction on glazing methods.

NOTE: Where double-glazed assemblies are used above, the requirements apply to the external pane of the glazed assembly only. For all other glazing, annealed glass may be used in accordance with AS 1288.
(v) Seals and weather strips There are no specific requirements for seals and weather strips at this BAL level.
(iv) Screens The openable portions of windows shall be screened internally or externally with screens that conform with Clause 3.6 and Clause 5.5.2.

C5.5.3 For Clause 5.5.3(c), screening of the openable portions of all windows is required in all BAL's to prevent the entry of embers to the building when the window is open.
For Clause 5.5.3 (c)(v), screening of the openable and fixed portions of some windows is required to reduce the effects of radiant heat on some tyes of glass. If the screening is required to reduce the effects of radiant heat on glass, and has to be externally fixed.
For Clause 5.5.3 (c)(v), if the screening is required only to prevent the entry of embers, the screening may be fitted externally or internally.

5.5.4 DOORS SIDE-HUNG EXTERNAL DOORS (including French Doors, Panel Fold and Bi-fold Doors)

Side-hung external doors, including French doors, panel fold and bi-fold doors, shall -
(a) Be protected by bushfire shutters that comply with Clause 3.7 and Clause 5.5.1.

- OR
- (b) Be protected externally by screens that comply with Clause 3.6 and Clause 5.5.2.
- OR
- (c) conform with the following:
 - (i) Door panel material Materials shall be -
 - (A) non combustible; OR
 - (B) solid timber, laminated timber or reconstituted timber door, having a minimum thickness of 35mm for the first 400mm above the threshold; OR
 - (C) hollow core, solid timber, laminated timber or reconstituted timber with a non-combustible kickplate on the outside for the first 400mm above the threshold; OR
 - (D) hollow core, solid timber, laminated timber or reconstituted timber protected externally by a screen that complies with Clause 5.5.2; OR
 - (E) for fully framed glazed door panels, the framing is made from metal or bushfire resisting timber (see Appendix F), or a timber species as specified in Paragraph E2, Appendix E or uPVC.
 - (ii) Door frame material Door frames shall be made from:
 - (A) Bushfire-resisting timber (see Appendix F); OR
 - (B) a timber species as specified in Paragraph E2 of Appendix E;

- OR
- (C) Metal. OR
- (D) Metal-reinforced PVC-U. The reinforcing members shall be made from aluminium, stainless steel, or corrosion-resistant steel.
- (iii) Hardware There are no specific requirements for hardwarea at this BAL level.
- (iv) Glazing the glazing shall be Grade A safety glass a minimum of 4mm in thickness, or glass blocks with no restriction on glazing methods. NOTE: Where double glazed units are used the above requirements apply to the external face of the window assembly only.
- (v) Seals and weather strips Weather strips, draft excluders or draft seals shall be installed.
- (vi) Screens There are no specific requirements for hardwarea at this BAL level.
- (vii) Doors shall be tight-fitting to the door frame and to an abutting door, if applicable.

5.5.5 DOORS-SLIDING DOORS

Sliding doors shall:
(a) Be protected by bushfire shutters that comply with Clause 3.7 and Clause 5.5.1.
OR
(b) Be protected externally by screens that comply with Clause 3.6 and Clause 5.5.2.
OR
(c) conform with the following:

- (i) Frame material The material for door frames, including fully framed glazed doors, shall be -
 - (A) Bushfire-resisting timber (see Appendix F). OR
 - (B) a timber species as specified in Paragraph E2 of Appendix E; OR
 - (C) Metal. OR
 - (D) Metal-reinforced uPVC. The reinforcing members shall be made from aluminium, stainless steel, or corrosion-resistant steel.
- (ii) Hardware There are no specific requirements for hardwarea at this BAL level.
- (iii) Glazing Where doors incorporate glazing, the glazing shall be Grade A safety glass a minimum of 4mm in thickness,
- (iv) Seals and weather strips There are no specific requirements for hardwarea at this BAL level.
- (v) Screens There are no specific requirements for hardwarea at this BAL level.
- (vi) Sliding panels Sliding panels shall be tight-fitting in the frames.

5.5.6 DOORS-VEHICLE ACCESS DOORS (GARAGE DOORS)

The following apply to vehicle access doors:
(a) The lower portion of a vehicle access door that is within 400mm of the ground when the door is closed (see Figure D4, Appendix D) shall be made from -

- (i) non combustible material; OR
- (ii) bushfire-resisting timber (see Appendix F); OR
- (iii) fibre- cement sheet, a minimum of 6mm in thickness; OR
- (iv) a timber species as specified in Paragraph E1, Appendix E; OR
- (iv) a combination of any Items (i), (iii) or (iv) above.

(b) All vehicle access doors doors shall be fitted with suitable weather strips, draught seals or brushses. Door assemblies fitted with guide tracks do not need edge gap protection.
NOTES:
1 Refer to AS/NZS 4505 for door tyes.
2 Gaps of door edges or building elements should be protected as per Section 3.
C5.5.6(b) These guide tracks do not provide a direct passage for embers into the building.
(c) Vehicle access doors with ventilation slots shall be protected in accordance with Clause 3.6.

5.6.1 ROOFS - GENERAL

The following apply to all tyes of roofs and roofing systems:
(a) Roof tiles, roof sheets and roof-covering accessories shall be non-combustible.
(b) The roof/wall junction shall be sealed, or otherwise protected in accordance with Clause 3.6.
(c) Roof ventilation openings, such as gable and roof vents, shall be fitted with ember guards made of non-combustible material or a mesh or perforated sheet conforming with Clause 3.6 and made of corrosion-resistant steel, bronze or aluminium.
(d) Only evaporative coolers manufactured in accordance with AS/NZS 60335.2.98 shall be used. Evaporative coolers with an internal damper to prevent the entry of embers into the roof space need to be screened externally.

5.6.2 TILED ROOFS

Tiled roofs shall be fully sarked. The sarking shall -
(a) be located on top of the roof framing, except that the roof battens may be fixed above the sarking;
(b) cover the entire roof area including ridges and hips; and
(c) extend into gutters and valleys.

5.6.3 SHEET ROOFS

Sheet roofs shall—
(a) be fully sarked in accordance with Clause 5.6.2, except that foil-backed insulation blankets may be installed over the battens; and
(b) have any gaps sealed at the fascia or wall line and at valleys, hips and ridges by -
(i) a mesh or perforated sheet that conforms with Clause 3.6 and that is made of corrosion-resistant steel, bronze or aluminium; or
(ii) mineral wool; or
(iii) other non-combustible material; or
(iv) a combination of any of Items (i), (ii) or (iii) above.
C5.6.3 - Sarking is used as a secondary form of ember protection for the roof space to account for minor gaps that may develop in sheet roofing.

5.6.4 VERANDA, CARPORT AND AWNING ROOFS

The following apply to veranda, carport and awning roofs:
(a) A veranda, carport or awning roof forming part of the main roof space [see Figure D1(a), Appendix D] shall meet all the requirements for the main roof, as specified in Clauses 5.6.1, to 5.6.6.
(b) A veranda, carport or awning roof separated from the main roof space by an external wall [see Figures D1(b) and D1(c), Appendix D] complying with Clause 5.4 shall have a non-combustible roof covering, except where the roof covering is a translucent or transparent material.
NOTE: There is no requirement to line the inderside of a veranda, carport or awning roof that is separated from the main roof space

5.6.5 ROOF PENETRATIONS

The following apply to roof penetrations:
(a) Roof penetrations, including roof lights, roof ventilators, roof-mounted evaporative cooling units, aerials, vent pipes and supports for solar collectors shall be sealed. The material used to seal the penetration shall be non-combustible.
(b) Openings in vented roof lights, roof ventilators or vent pipes shall conform with Clause 3.6 and be made of corrosion-resistant steel, bronze or aluminium.
NOTE: This requirement does not apply to a room sealed gas appliance. NOTE: A gas appliance designed such that air for combustion dose not enter from, or combustion products enter into, the room which the appliance is located.
(c) All overhead glazing shall be Grade A safety glass complying with AS 1288.
(d) Glazed elements in roof lights and skylights may be of polymer, provided a Grade A safety glass diffuser, complying with AS 1288, is installed under the glazing. Where glazing is an insulating glazing unit (IGU), Grade A toughened safety glass of minimum 4 mm in thickness shall be used in the outer pane of the IGU.
(e) Flashing elements of tubular skylights may be of a fire-retardant material, provided the roof integrity is maintained by an under-flashing of a material having a flammability index not exceeding five..
(f) Evaporative cooling units shall be fitted with non-combustible butterfly closers as close as practicable to the roof level, or the unit shall be fitted with non-combustible covers with a mesh or perforated sheet with a maximum aperture of 2mm, made of corrosion-resistant steel, bronze or aluminium .
(g) Vent pipes made from PVC are permitted.
(h) Eaves lighting shall be adequately sealed and not compromise the performance of the element.

5.6.6 EAVES LININGS, FASCIAS AND GABLES

The following apply to eaves linings, fascias and gables:
(a) Gables shall comply with Clause 5.4.
(b) Eaves penetrations shall be protected the same as for roof penetrations, as specified in Clause 5.6.5.
(c) Eaves ventilation openings shall be fitted with ember guards in accordance with Clause 3.6 and made of corrosion-resistant steel, bronze or aluminium

Joints in eaves linings, fascias and gables may be sealed with plastic joining strips or timber storm moulds.

This standard does not provide construction requirements for fascias, bargeboards and eaves linings.

5.6.7 GUTTERS AND DOWNPIPES

This Standard does not provide material requirements for downpipes. If installed, gutter and valley leaf guards shall be non-combustible. With the exception of box gutters, gutters shall be metal or PVC-U. Box gutters shall be non-combustible and flashed at the junction with the roof with noncombustible material.

5.7.1 VERANDAS, DECKS, STEPS AND LANDINGS - GENERAL

Decking may be spaced.
There is no requirement to enclose the subfloor spaces of verandas, decks, steps, ramps or landings.
C5.7.7 - Spaced decking is nominally spaced at 3 mm (in accordance with standard industry practice); however, due to the nature of timber decking with seasonal changes in moisture content, that spacing may range from 0 - 5 mm during service. It should be noted that recent research studies have shown that gaps at 5 mm spacing afford opportunity for embers to become lodged in between timbers, which may contribute to a fire. Larger gap spacings of 10 mm may preclude this from happening but such a spacing regime may not be practical for a timber deck.

5.7.2 ENCLOSED SUBFLOOR SPACES OF VERANDAS, DECKS, STEPS, RAMPS AND LANDINGS

5.7.2.1 Materials to enclose a subfloor space

This standard does not provide construction requirements for the materials used to enclose a subfloor space except where those materials are less than 400mm from the ground.
Where the materials used to enclose a subfloor space are less than 400mm from the ground, they shall conform with Clause 5.4.

5.7.2.2 Supports

This Standard does not provide construction requirements for support posts, columns, stumps, stringers, piers and poles.

5.7.2.3 Framing

This Standard does not provide construction requirements for the framing of verandas, decks, ramps or landings (i.e., bearers and joists).

5.7.2.4 Decking, stair treads and the trafficable surfaces of ramps and landings

This standard does not provide construction requirements for decking, stair treds and the trafficable surfaces and landings that are more than 300mm from a glazed element.

Decking, stair treads and the trafficable surfaces of ramps and landings less than 300mm (measured horizontally at deck level) from glazed elements that are less than 400mm (measured vertically) from the surface of the deck (see Figure D2, Appendix D) shall be made from -
(a) of non-combustible material; or
(b) of bushfire-resisting timber (see Appendix F); or
(c) a timber species as specified in Paragraph E1, Appendix E; or
(d) uPVC; or
(e) a combination of Items (a), (b), (c) or (d).

5.7.3 UNENCLOSED SUBFLOOR SPACES OF VERANDAS, DECKS, STEPS, RAMPS AND LANDINGS

5.7.3.1 Supports

This Standard does not provide construction requirements for support posts, columns, stumps, stringers, piers and poles.

5.7.3.2 Framing

This Standard does not provide construction requirements for the framing of verandas, decks, ramps or landings (i.e., bearers and joists).

5.7.3.3 Decking, stair treads and the trafficable surfaces of ramps and landings

This Standard does not provide construction requirements for deshing, stair treds and the trafficable surfaces of ramps and landings that are more than 300mm from a glazed element.

Decking, stair treads and the trafficable surfaces of ramps and landings less than 300mm (measured horizontally at deck level) from glazed elements that are less than 400mm (measured vertically) from the surface of the deck (see Figure D2, Appendix D) shall be made from -
(a) of non-combustible material; or
(b) of bushfire-resisting timber (see Appendix F); or
(c) a timber species as specified in Paragraph E1, Appendix E; or
(d) uPVC; or
(e) a combination of any of Items (a), (b), (c) or (d).

5.7.4 BALUSTRADES, HANDRAILS OR OTHER BARRIERS

This Standard does not provide construction requirements for balustrades, handrails and other barriers.

5.7.5 VERANDA POSTS

Verandah Posts -
(a) Shall be timber mounted on galvanised mounted shoes or stirrups with a clearance of no less than 75mm above adjacent ground level; or
(b) if less than 400mm (measured vertically) from the surface of the deck or ground (see Fig D2, Appendix D) shall be made from -

- (i) non-combustible material;or
- (ii) bushfire-resisting timber (see Appendix F); or
- (iii) a timbers species as specified in Paragraph E1, Appendix E; or
- (iv) a combination of any of items (a) or (b).

5.8 WATER AND GAS SUPPLY PIPES

Above-ground, exposed water and gas supply pipes shall be metal.

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS


© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

	SPECIFICATION:	REVISION		DRAWN	CLIENT:	HOUSE DESIGN:		HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
	NOW BY WILSON HOMES	1	SITE PLAN	MFC 02/04/2026	ROBERT DAVIS	AUGUSTA 15		H-WNWAUG10SA	
	COPYRIGHT:	2	CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	ADDRESS:	FACADE DESIGN:		FACADE CODE:	
	© 2026	3	CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	8 MURRUMBUNG CT, GRINDELWALD TAS 7277	OAKWOOD		F-WNWAUG100KWDA	
		4	PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026	LOT / SECTION / CT:	SHEET TITLE:	SHEET No.:	SCALES:	
		5	PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026	92 / - / 38605	COUNCIL:	22 / 23		714740
						WEST TAMAR			

Rafter Spacing	Product
Up to and including 600mm	EnviroSeal™ Roof Tile or EnviroSeal™ Roof Tile Plus
Over 600mm	EnviroSeal™ Roof Tile Safety

Figure 5.1. Tiled Roofs

- Install EnviroSeal roof tile sarking on top of the roof framing and below the roof battens.
- For further fixing details contact CSR technical support.

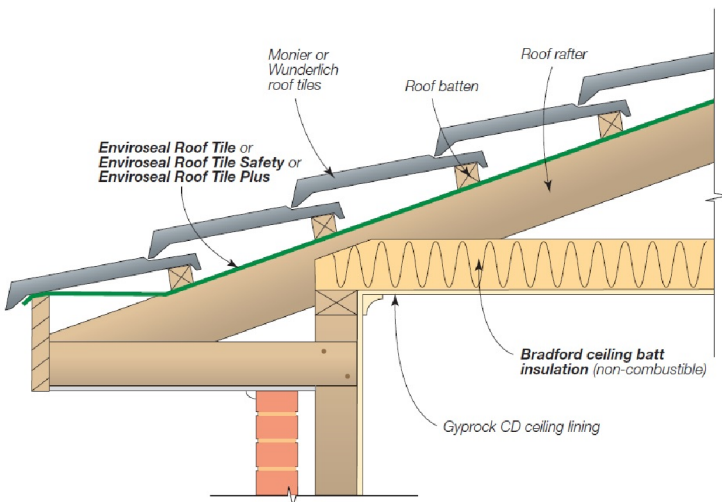

Application	Product
Sarking	EnviroSeal™ Resiwrap
Foil faced insulation blanket	Bradford Anticon™
Gap seal	Bradford Fireseal BAL 12.5 - 40 Blanket

Figure 5.2.1. Fascia Detail – Metal Roof (BAL12.5-40)

- Install EnviroSeal Resiwrap to the entire roof area over the top of the battens.
- Immediately above the fascia install BAL12.5 – 40 Blanket extending up the roof and over the first batten. Compress with the roof sheeting.
- For further fixing details contact CSR technical support.

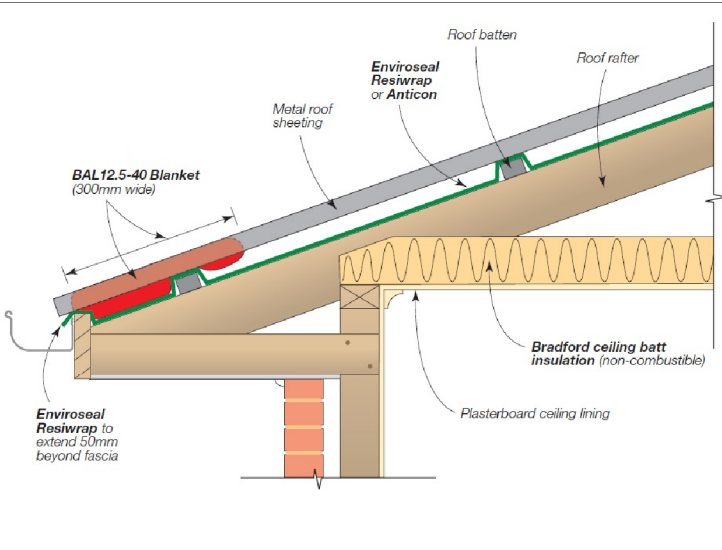


Figure 5.2.2. Valley Detail – Steel Roof (BAL-12.5 – BAL-40)

- Install EnviroSeal Resiwrap to the entire roof area over the top of the battens.
- BAL12.5 – 40 Blanket to be laid over the top of the sarking extending into the valley gutter. Compress with roof sheeting.
- For further fixing details contact CSR technical support.

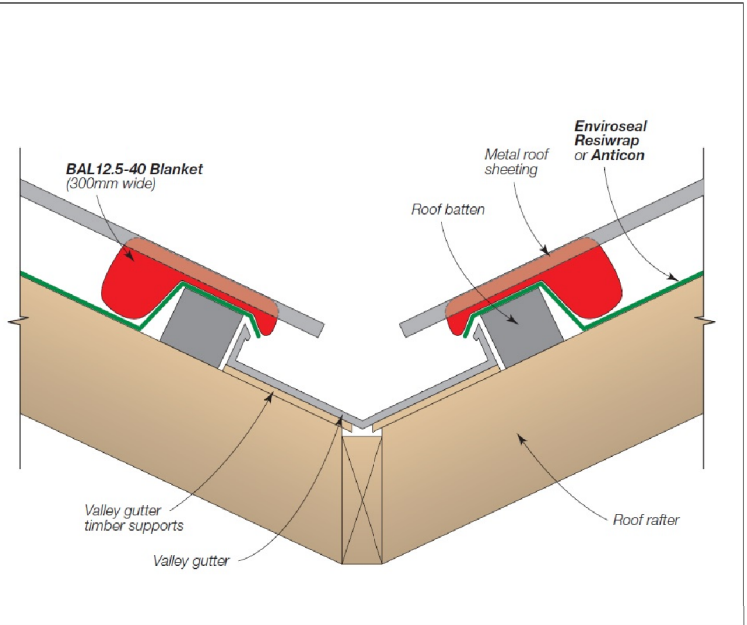


Figure 5.2.3. Barge Detail – Steel Roof (BAL-12.5 – BAL-40)

- Install EnviroSeal Resiwrap to the entire roof area over the top of the battens.
- At barge install BAL12.5 – 40 Blanket and compress with roof sheeting.
- For further fixing details contact CSR technical support.


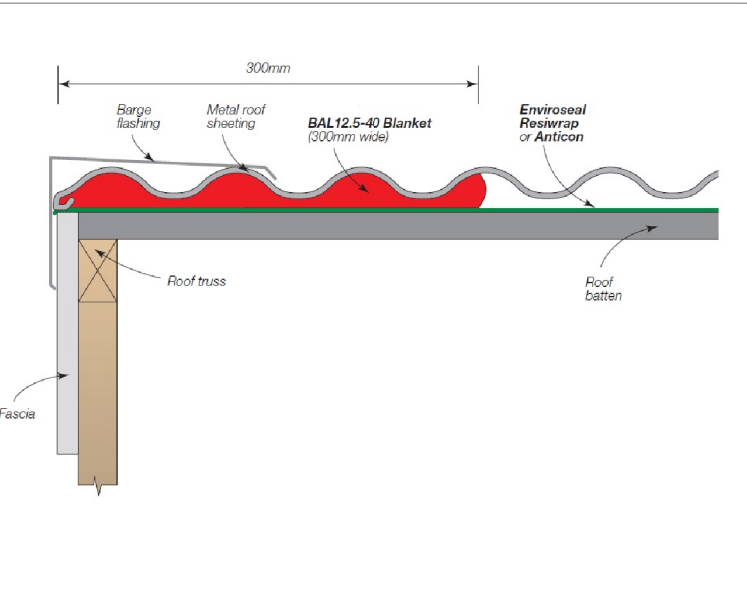


Figure 5.2.4. Hip/Ridge Detail – Steel Roof (BAL-12.5 – BAL-40)

- Install EnviroSeal Resiwrap to the entire roof area over the top of the battens.
- At the ridge/hip lay BAL12.5 – 40 Blanket over the gap between the roof sheets and compress with the ridge capping to the roof profile.
- For further fixing details contact CSR technical support.

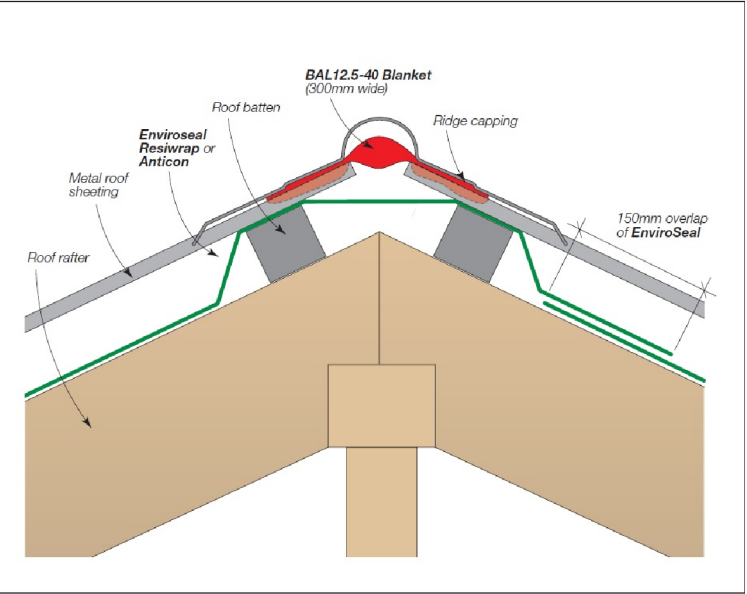

Details for the purpose of bushfire proofing only. To be printed in colour.

Images sourced from Bradfords "Bushfire Roofing System", Published 04/11.

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION: NOW BY WILSON HOMES	REVISION	DRAWN	CLIENT: ROBERT DAVIS	HOUSE DESIGN: AUGUSTA 15	HOUSE CODE: H-WNWAUG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
COPYRIGHT: © 2026	1 SITE PLAN	MFC 02/04/2026	ADDRESS: 8 MURRUMBUNG CT, GRINDELWALD TAS 7277	FACADE DESIGN: OAKWOOD	FACADE CODE: F-WNWAUG100KWDA	
	2 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 15/05/2026	LOT / SECTION / CT: 92 / - / 38605	SHEET TITLE: BAL 12.5 - BAL 40 ROOF DETAILS	SHEET No.: 23 / 23	
	3 CONSOLIDATED PROPOSAL 1 UPDATE	MFC 28/05/2026	COUNCIL: WEST TAMAR		SCALES:	
	4 PRELIM PLANS - INITIAL ISSUE	TDI 12/06/2026				
	5 PRELIMINARY PLANS - PLAN CORRECTIONS	TNG 30/07/2026				

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT
LIVABLE HOUSING

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

714740